WIMA SMD-PET

Metallized Polyester (PET)
SMD Film Capacitors with Box Encapsulation

Special Features


- **Size codes 1812, 2220, 2824, 4030, 5040 and 6054 with PET and encapsulated**
- **Operating temperature up to 100° C**
- **Self-healing**
- **According to RoHS 2002/95/EC**

Typical Applications

For general DC-applications e.g.
- **By-pass**
- **Blocking**
- **Coupling and decoupling**
- **Timing**

Construction

Dielectric:
Polyethylene-terephthalate (PET) film
Capacitor electrodes:
Vacuum-deposited
Internal construction:

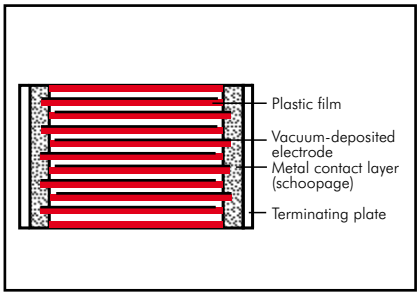

Encapsulation:
Solvent-resistant, flame-retardant plastic case, UL 94 V-0
Terminations:
Tinned plates.
Marking:
Box colour: Black.

Electrical Data

Capacitance range:
0.01 µF to 6.8 µF
Rated voltages:
63 VDC, 100 VDC, 250 VDC, 400 VDC, 630 VDC, 1000 VDC
Capacitance tolerances:
±20%, ±10% (±5% available subject to special enquiry)
Operating temperature range:
–55° C to +100° C (+125° C available subject to special enquiry)
Climatic test category:
55/100/21 according to IEC for size codes 1812 to 2824
55/100/56 according to IEC for size codes 4030 to 6054
Insulation resistance at +20° C:

U_r	U_{test}	C ⩽ 0.33 µF	0.33 µF < C ⩽ 6.8 µF
63 VDC 100 VDC	50 V 100 V	⩾ 3.75 x 10^3 MΩ (mean value: 1 x 10^4 MΩ)	⩾ 1250 sec (MΩ x µF) (mean value: 3000 sec)
⩾ 250 VDC	100 V	⩾ 1 x 10^4 MΩ (mean value: 5 x 10^4 MΩ)	⩾ 3000 sec (MΩ x µF) (mean value: 10 000 sec)

Measuring time: 1 min.
Dissipation factors at +20° C: tan δ

at f	C ⩽ 0.1 µF	0.1 µF < C ⩽ 1.0 µF	C > 1.0 µF
1 kHz	⩽ 8 x 10^{-3}	⩽ 8 x 10^{-3}	⩽ 10 x 10^{-3}
10 kHz	⩽ 15 x 10^{-3}	⩽ 15 x 10^{-3}	–
100 kHz	⩽ 30 x 10^{-3}	–	–

Maximum pulse rise time: for pulses equal to the rated voltage

Capacitance µF	Pulse rise time V/µsec max. operation/test					
	63 VDC	100 VDC	250 VDC	400 VDC	630 VDC	1000 VDC
0.01 ... 0.022	30/300	35/350	40/400	35/350	40/400	50/500
0.033 ... 0.068	20/200	20/200	40/400	21/210	25/250	32/320
0.1 ... 0.22	10/100	10/100	12/120	14/140	17/170	–
0.33 ... 0.68	8/80	6/60	9/90	10/100	–	–
1.0 ... 2.2	3.5/35	4/40	7/70	–	–	–
3.3 ... 6.8	3/30	3/30	–	–	–	–

Dip Solder Test/Processing

Resistance to soldering heat:
Test Tb in accordance with DIN IEC 60068-2-58/DIN EN 60384-19.
Soldering bath temperature max. 260° C.
Soldering duration max. 5 sec.
Change in capacitance ΔC/C < 5%.
Soldering process:
Wave soldering and re-flow soldering (see temperature/time graphs page 12).

Packing

Available taped and reeled in 12 mm blister pack.

Detailed taping information and graphs at the end of the catalogue.

For further details and graphs please refer to Technical Information.

Continuation

General Data

Capacitance	63 VDC/40 VAC*			100 VDC/63 VAC*			250 VDC/160 VAC*		
	Size code	H ± 0.3	Part number	Size code	H ± 0.3	Part number	Size code	H ± 0.3	Part number
0.01 µF	1812	3.0	SMDTC02100KA00_____	1812	3.0	SMDTD02100KA00_____	1812	4.0	SMDTF02100KB00_____
	2220	3.5	SMDTC02100QA00_____	2220	3.5	SMDTD02100QA00_____	2220	3.5	SMDTF02100QA00_____
	2824	3.0	SMDTC02100TA00_____	2824	3.0	SMDTD02100TA00_____	2824	3.0	SMDTF02100TA00_____
0.015 „	1812	3.0	SMDTC02150KA00_____	1812	3.0	SMDTD02150KA00_____	1812	4.0	SMDTF02150KB00_____
	2220	3.5	SMDTC02150QA00_____	2220	3.5	SMDTD02150QA00_____	2220	3.5	SMDTF02150QA00_____
	2824	3.0	SMDTC02150TA00_____	2824	3.0	SMDTD02150TA00_____	2824	3.0	SMDTF02150TA00_____
0.022 „	1812	3.0	SMDTC02220KA00_____	1812	3.0	SMDTD02220KA00_____	1812	4.0	SMDTF02220KB00_____
	2220	3.5	SMDTC02220QA00_____	2220	3.5	SMDTD02220QA00_____	2220	3.5	SMDTF02220QA00_____
	2824	3.0	SMDTC02220TA00_____	2824	3.0	SMDTD02220TA00_____	2824	3.0	SMDTF02220TA00_____
0.033 „	1812	3.0	SMDTC02330KA00_____	1812	3.0	SMDTD02330KA00_____	2220	3.5	SMDTF02330QA00_____
	2220	3.5	SMDTC02330QA00_____	2220	3.5	SMDTD02330QA00_____	2824	3.0	SMDTF02330TA00_____
	2824	3.0	SMDTC02330TA00_____	2824	3.0	SMDTD02330TA00_____	4030	5.0	SMDTF02330VA00_____
0.047 „	1812	3.0	SMDTC02470KA00_____	1812	3.0	SMDTD02470KA00_____	2220	3.5	SMDTF02470QA00_____
	2220	3.5	SMDTC02470QA00_____	2220	3.5	SMDTD02470QA00_____	2824	3.0	SMDTF02470TA00_____
	2824	3.0	SMDTC02470TA00_____	2824	3.0	SMDTD02470TA00_____	4030	5.0	SMDTF02470VA00_____
0.068 „	1812	3.0	SMDTC02680KA00_____	1812	3.0	SMDTD02680KA00_____	2220	3.5	SMDTF02680QA00_____
	2220	3.5	SMDTC02680QA00_____	2220	3.5	SMDTD02680QA00_____	2824	3.0	SMDTF02680TA00_____
	2824	3.0	SMDTC02680TA00_____	2824	3.0	SMDTD02680TA00_____	4030	5.0	SMDTF02680VA00_____
0.1 µF	1812	3.0	SMDTC03100KA00_____	1812	3.0	SMDTD03100KA00_____	2220	3.5	SMDTF03100QA00_____
	2220	3.5	SMDTC03100QA00_____	2220	3.5	SMDTD03100QA00_____	2824	5.0	SMDTF03100TB00_____
	2824	3.0	SMDTC03100TA00_____	2824	3.0	SMDTD03100TA00_____	4030	5.0	SMDTF03100VA00_____
0.15 „	1812	3.0	SMDTC03150KA00_____	1812	4.0	SMDTD03150KB00_____	2220	4.5	SMDTF03150QB00_____
	2220	3.5	SMDTC03150QA00_____	2220	3.5	SMDTD03150QA00_____	2824	5.0	SMDTF03150TB00_____
	2824	3.0	SMDTC03150TA00_____	2824	3.0	SMDTD03150TA00_____	4030	5.0	SMDTF03150VA00_____
0.22 „	1812	3.0	SMDTC03220KA00_____	1812	4.0	SMDTD03220KB00_____	2220	4.5	SMDTF03220QB00_____
	2220	3.5	SMDTC03220QA00_____	2220	3.5	SMDTD03220QA00_____	2824	5.0	SMDTF03220TB00_____
	2824	3.0	SMDTC03220TA00_____	2824	3.0	SMDTD03220TA00_____	4030	5.0	SMDTF03220VA00_____
0.33 „	1812	4.0	SMDTC03330KB00_____	2220	4.5	SMDTD03330QB00_____	2824	5.0	SMDTF03330TB00_____
	2220	3.5	SMDTC03330QA00_____	2824	5.0	SMDTD03330TB00_____	4030	5.0	SMDTF03330VA00_____
	2824	3.0	SMDTC03330TA00_____	4030	5.0	SMDTD03330VA00_____	5040	6.0	SMDTF03330XA00_____
0.47 „	1812	4.0	SMDTC03470KB00_____	2220	4.5	SMDTD03470QB00_____	4030	5.0	SMDTF03470VA00_____
	2220	3.5	SMDTC03470QA00_____	2824	5.0	SMDTD03470TB00_____	5040	6.0	SMDTF03470XA00_____
	2824	3.0	SMDTC03470TA00_____	4030	5.0	SMDTD03470VA00_____			
0.68 „	2220	4.5	SMDTC03680QB00_____	2824	5.0	SMDTD03680TB00_____	5040	6.0	SMDTF03680XA00_____
	2824	3.0	SMDTC03680TA00_____	4030	5.0	SMDTD03680VA00_____			
	4030	5.0	SMDTC03680VA00_____	5040	6.0	SMDTD03680XA00_____			
1.0 µF	2220	4.5	SMDTC04100QB00_____	2824	5.0	SMDTD04100TB00_____	6054	7.0	SMDTF04100YA00_____
	2824	3.0	SMDTC04100TA00_____	4030	5.0	SMDTD04100VA00_____			
	4030	5.0	SMDTC04100VA00_____	5040	6.0	SMDTD04100XA00_____			
1.5 „	2824	5.0	SMDTC04150TB00_____	4030	5.0	SMDTD04150VA00_____			
	4030	5.0	SMDTC04150VA00_____	5040	6.0	SMDTD04150XA00_____			
2.2 „	2824	5.0	SMDTC04220TB00_____	5040	6.0	SMDTD04220XA00_____			
	4030	5.0	SMDTC04220VA00_____						
3.3 „	4030	5.0	SMDTC04330VA00_____	5040	6.0	SMDTD04330XA00_____			
4.7 „	5040	6.0	SMDTC04470XA00_____	6054	7.0	SMDTD04470YA00_____			
6.8 „	6054	7.0	SMDTC04680YA00_____						

Part number completion:	
Tolerance:	20 % = M
	10 % = K
	5 % = J
Packing:	bulk = S
Pin length:	none = 00

Taped version see page 126.

* AC voltage: f = 50 Hz; 1.4 x U_{rms} + UDC ⩽ U_r

Dims. in mm.

Rights reserved to amend design data without prior notification.

Continuation page 18

Continuation

General Data


Capacitance	400 VDC/200 VAC*			630 VDC/300 VAC*			1000 VDC/400 VAC*		
	Size code	H ± 0.3	Part number	Size code	H ± 0.3	Part number	Size code	H ± 0.3	Part number
0.01 µF	2824 4030	3.0 5.0	SMDTG02100TA00_ _ _ _ SMDTG02100VA00_ _ _ _	4030	5.0	SMDTJ02100VA00_ _ _ _			
0.015 „	2824 4030	3.0 5.0	SMDTG02150TA00_ _ _ _ SMDTG02150VA00_ _ _ _	4030	5.0	SMDTJ02150VA00_ _ _ _	5040	6.0	SMDTO12150XA00_ _ _ _
0.022 „	2824 4030	3.0 5.0	SMDTG02220TA00_ _ _ _ SMDTG02220VA00_ _ _ _	5040	6.0	SMDTJ02220XA00_ _ _ _	5040	6.0	SMDTO12220XA00_ _ _ _
0.033 „	2824 4030	5.0 5.0	SMDTG02330TB00_ _ _ _ SMDTG02330VA00_ _ _ _	5040	6.0	SMDTJ02330XA00_ _ _ _	5040	6.0	SMDTO12330XA00_ _ _ _
0.047 „	2824 4030	5.0 5.0	SMDTG02470TB00_ _ _ _ SMDTG02470VA00_ _ _ _	5040	6.0	SMDTJ02470XA00_ _ _ _	6054	7.0	SMDTO12470YA00_ _ _ _
0.068 „	4030 5040	5.0 6.0	SMDTG02680VA00_ _ _ _ SMDTG02680XA00_ _ _ _	5040	6.0	SMDTJ02680XA00_ _ _ _			
0.1 µF	4030 5040	5.0 6.0	SMDTG03100VA00_ _ _ _ SMDTG03100XA00_ _ _ _	6054	7.0	SMDTJ03100YA00_ _ _ _			
0.15 „	4030 5040	5.0 6.0	SMDTG03150VA00_ _ _ _ SMDTG03150XA00_ _ _ _	6054	7.0	SMDTJ03150YA00_ _ _ _			
0.22 „	5040	6.0	SMDTG03220XA00_ _ _ _	6054	7.0	SMDTJ03220YA00_ _ _ _			
0.33 „	5040	6.0	SMDTG03330XA00_ _ _ _						
0.47 „	6054	7.0	SMDTG03470YA00_ _ _ _						

* AC voltage: f = 50 Hz; 1.4 x U_{rms} + UDC ⩽ U_r

Dims. in mm.

The values of the WIMA SMD-PEN range according to the main catalogue 2009 are still available on request.

Solder pad recommendation



Size code	L ±0.3	W ±0.3	d	a min.	b min.	c max.
1812	4.8	3.3	0.5	1.2	3.5	3.5
2220	5.7	5.1	0.5	1.2	4	4.5
2824	7.2	6.1	0.5	1.2	4	6.5
4030	10.2	7.6	0.5	2.5	6	9
5040	12.7	10.2	0.7	2.5	6	11.5
6054	15.3	13.7	0.7	2.5	6	14

Part number completion:	
Tolerance:	20 % = M
	10 % = K
	5 % = J
Packing:	bulk = S
Pin length:	none = 00

Taped version see page 126.


Rights reserved to amend design data without prior notification.

Recommendation for Processing and Application of SMD Capacitors

Layout Form

The components can generally be positioned on the carrier material as desired. In order to prevent soldering shadows or ensure regular temperature distribution, extreme concentration of the components should be avoided. In practice, it has proven best to keep a minimum distance of the soldering surfaces between two WIMA SMDs of twice the height of the components.

Solder Pad Recommendation



Size code	L ± 0.3	W ± 0.3	d	a min.	b min.	c max.
1812	4.8	3.3	0.5	1.2	3.5	3.5
2220	5.7	5.1	0.5	1.2	4	4.5
2824	7.2	6.1	0.5	1.2	4	6.5
4030	10.2	7.6	0.5	2.5	6	9
5040	12.7	10.2	0.7	2.5	6	11.5
6054	15.3	13.7	0.7	2.5	6	14

The solder pad size recommendations given for each individual series are to be understood as minimum dimensions which can at any time be adjusted to the layout form.

Processing


The processing of SMD components

– assembling
– soldering
– electrical final inspection/ calibrating


must be regarded as a complete process. The soldering of the printed circuit board, for example, can constitute considerable stress on all the electronic components. The manufacturer's instructions on the processing of the components are mandatory.

Soldering Process

Re-flow soldering

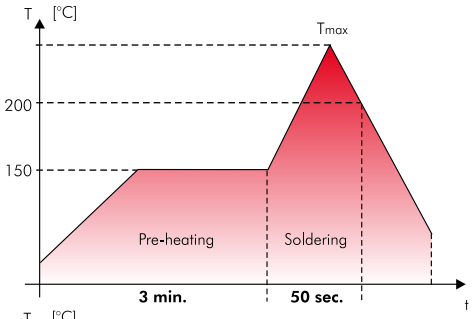

SMD-PET	
Size code	Tmax.
1812	220° C
2220	230° C
2824	230° C
4030	230° C
5040	240° C
6054	250° C

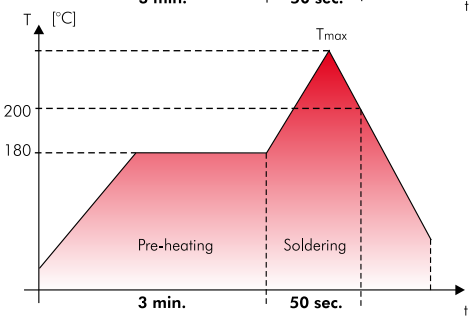

SMD-PPS	
Size code	Tmax.
1812	250° C
2220	250° C
2824	250° C
4030	250° C
5040	250° C
6054	250° C

Temperature/time graph for the permissible processing temperature of the WIMA SMD film capacitor for typical convection soldering processes.

Due to the diverse procedures and the varying heat requirements of the different types of components, an exact processing temperature for re-flow soldering processes cannot be specified. The graph shows the upper limits of temperature and time which must not be exceeded when establishing the solder profile according to your actual requirements.
A max. temperature of T = 210° C inside the component should not be exceeded when processing WIMA SMD capacitors.

SMD Handsoldering

WIMA SMD capacitors with plastic film dielectric are generally suitable for hand-soldering with a soldering iron where, however, similar to automated soldering processes, a certain duration and temperature should not be exceeded. These parameters are dependent on the physical size of the components and the relevant heat absorption involved.

The below data are to be regarded as guideline values and should serve to avoid damage to the dielectric caused by excessive heat during the soldering process. The soldering quality depends on the tool used and on the skill and experience of the person with the soldering iron in hand.

Size code	Temperature °C / °F	Time duration
1812	225 / 437	2 sec plate 1 / 5 sec off / 2 sec plate 2
2220	225 / 437	3 sec plate 1 / 5 sec off / 3 sec plate 2
2824	250 / 482	3 sec plate 1 / 5 sec off / 3 sec plate 2
4030	260 / 500	5 sec plate 1 / 5 sec off / 5 sec plate 2
5040	260 / 500	5 sec plate 1 / 5 sec off / 5 sec plate 2
6054	260 / 500	5 sec plate 1 / 5 sec off / 5 sec plate 2

Recommendation for Processing and Application of SMD Capacitors (Continuation)

Solder Paste

To obtain the best soldering performance we suggest the use of following solder paste alloy:

Lead free solder paste
Sn - Bi
Sn - Zn (Bi)
Sn - Ag - Cu

Solder paste with lead
Sn - Pb - Ag (Sn60-Pb40-A, Sn63-Pb37-A)

Initial Operation/Calibration

Due to the stress which the components are subjected to during processing, reversible parameter changes occur in almost all electronic components. The capacitance recovery accuracy to be expected with careful processing is within a scope of

$|\Delta C/C| \leqslant 5\ \%$.

For the initial operation of the device a minimum storage time of

$t \geqslant 24$ hours

is to be taken into account. With calibrated devices or when the application is largely dependent on capacitance it is advisable to prolong the storage time to

$t \geqslant 10$ days

In this way ageing effects of the capacitor structure can be anticipated. Parameter changes due to processing are not to be expected after this period of time

Humidity Protection Bags

Taped WIMA SMD capacitors are shipped in humidity protection bags according to JEDEC standard, level 1 (EMI/static-shielding bags conforming to MIL-B 81705, Type 1, Class 1). Under controlled conditions the components can be stored two years and more in the originally sealed bag. Opened packing units should be consumed instantly or resealed for specific storage under controlled conditions.

Reliability

Taking account of the manufacturer's guidelines and compatible processing, the WIMA SMD stand out for the same high quality and reliability as the analogous through-hole WIMA series. The technology of metallized film capacitors used e.g. in WIMA SMD-PET achieves the best values for all fields of application. The expected value is about:

$\lambda_0 \leqslant 2$ fit

Furthermore the production of all WIMA components is subject to the regulations laid down by ISO 9001:2008 as well as the guidelines for component specifications set out by IEC quality assessment system (IECQ-CECC) for electronic components.

Electrical Characteristics and Fields of Application

Basically the WIMA SMD series have the same electrical characteristics as the analogous through-hole WIMA capacitors. Compared to ceramic or tantalum dielectrics WIMA SMD capacitors have a number of other outstanding qualities:

- **favourable pulse rise time**
- **low ESR**
- **low dielectric absorption**
- **available in high voltage series**
- **large capacitance spectrum**
- **stand up to high mechanical stress**
- **good long-term stability**


As regards technical performance as well as quality and reliability, the WIMA SMD series offer the possibility to cover nearly all applications of conventionally through-hole film capacitors with SMD components. Furthermore, the WIMA SMD series can now be used for all the demanding capacitor applications for which, in the past, the use of through-hole components was mandatory:

- **measuring techniques**
- **oscillator circuits**
- **differentiating and integrating circuits**
- **A/D or D/A transformers**
- **sample and hold circuits**
- **automotive electronics**


With the WIMA SMD programme available today, the major part of all plastic film capacitors can be replaced by WIMA SMD components. The field of application ranges from standard coupling capacitors to use in switch-mode power supplies as filter or charging capacitors with high voltage and capacitance values, as well as in telecommunications e.g. the well-known telephone capacitor 1µF/250VDC.


Blister Tape Packaging and Packing Units of the WIMA SMD Capacitors

Tape reel:

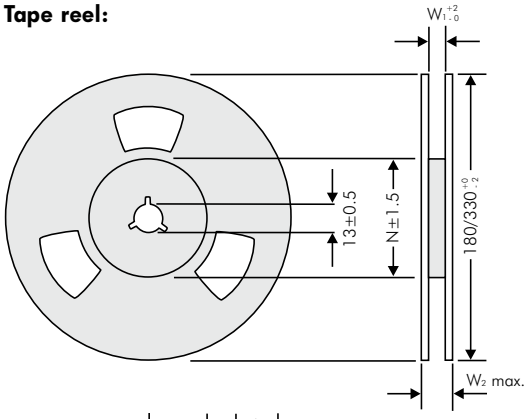

Tape advance and return:

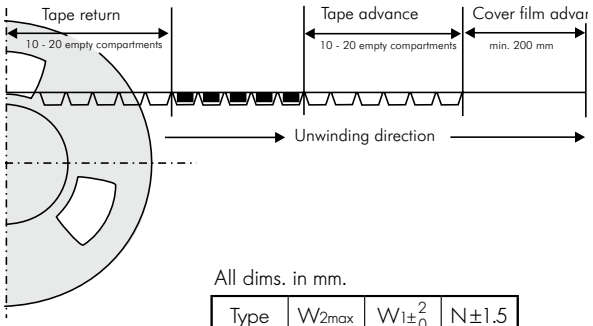

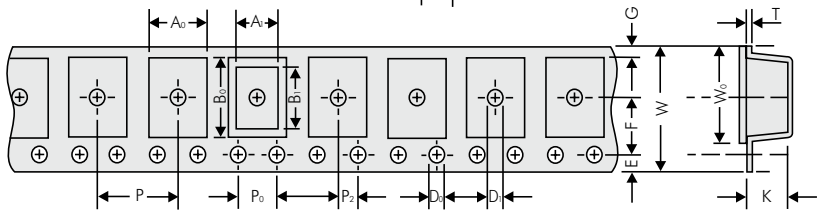

All dims. in mm.

Type	W2max	W1±$^{2}_{0}$	N±1.5
1812	19	12.4	62
2220	19	12.4	62
2824	19	12.4	62
4030	22.4	16.4	60
5040	30.4	24.4	90
6054	30.4	24.4	90

Packing units

Size Code 1812		A0 ±0.1	A1	B0 ±0.1	B1	D0 +0.1 -0	D1 +0.1 -0	P ±0.1	P0* ±0.1	P2 ±0.05	E ±0.1	F ±0.05	G	W ±0.3	W0 ±0.2	K ±0.1	T ±0.1	taped Reel 180 mm ø	taped Reel 330 mm ø	bulk Mini	bulk Standard
Box size	Code																				
4.8x3.3x3	**KA**	3.55	3.3	5.1	4.8	ø1.5	ø1.5	8	4	2	1.75	5.5	2.2	12	9.5	3.4	0.3	750	2500	1000	3000
4.8x3.3x4	**KB**	3.55	3.3	5.1	4.8	ø1.5	ø1.5	8	4	2	1.75	5.5	2.2	12	9.5	4.4	0.3	500	2000	1000	3000

Size Code 2220		A0 ±0.1	A1	B0 ±0.1	B1	D0 +0.1 -0	D1 +0.1 -0	P ±0.1	P0* ±0.1	P2 ±0.05	E ±0.1	F ±0.05	G	W ±0.3	W0 ±0.2	K ±0.1	T ±0.1	taped Reel 180 mm ø	taped Reel 330 mm ø	bulk Mini	bulk Standard
Box size	Code																				
5.7x5.1x3.5	**QA**	6.3	5.7	5.6	5.1	ø1.5	ø1.5	8	4	2	1.75	5.5	1.95	12	9.5	3.7	0.3	500	1800	1000	3000
5.7x5.1x4.5	**QB**	6.3	5.7	5.6	5.1	ø1.5	ø1.5	8	4	2	1.75	5.5	1.95	12	9.5	4.7	0.3	400	1500	1000	3000

Size Code 2824		A0 ±0.1	A1	B0 ±0.1	B1	D0 +0.1 -0	D1 +0.1 -0	P ±0.1	P0* ±0.1	P2 ±0.05	E ±0.1	F ±0.05	G	W ±0.3	W0 ±0.2	K ±0.1	T ±0.1	taped Reel 330 mm ø	bulk Mini	bulk Standard
Box size	Code																			
7.2x6.1x3	**TA**	6.6	6.1	7.7	7.2	ø1.5	ø1.5	12	4	2	1.75	5.5	0.9	12	9.5	3.4	0.3	1500	500	2000
7.2x6.1x5	**TB**	6.6	6.1	7.7	7.2	ø1.5	ø1.5	12	4	2	1.75	5.5	0.9	12	9.5	5.4	0.4	750	500	2000

	Code	A0 ±0.1	A1	B0 ±0.1	B1	D0 +0.1 -0	D1 +0.1 -0	P ±0.1	P0* ±0.1	P2 ±0.05	E ±0.1	F ±0.05	G	W ±0.3	W0 ±0.2	K ±0.1	T ±0.1	taped Reel 330 mm ø	bulk Mini	bulk Standard
Size Code 4030	**VA**	10.7	10.2	8.1	9.1	ø1.5	ø1.5	16	4	2	1.75	7.5	1.9	16	13.3	5.5	0.3	775	500	2000
Size Code 5040	**XA**	13.5	12.7	11	11.5	ø1.5	ø1.5	16	4	2	1.75	11.5	4.7	24	21.3	6.5	0.3	600	200	1000
Size Code 6054	**YA**	17.0	16.5	15.6	15.0	ø1.5	ø1.5	20	4	2	1.75	11.5	2.95	24	21.3	7.5	0.3	450	100	500

* cumulative after 10 steps ± 0.2 mm max.
Samples and pre-production needs on request or 1 Reel minimum.

Part number codes for SMD packing

W (Blister)	ø in mm	Code
12	180	**P**
12	330	**Q**
16	330	**R**
24	330	**T**

Bulk Standard	**S**

07.12

WIMA Part Number System

A WIMA part number consists of 18 digits and is composed as follows:

Field 1 - 4: Type description
Field 5 - 6: Rated voltage
Field 7 - 10: Capacitance
Field 11 - 12: Size and PCM
Field 13 - 14: Special features (e.g. Snubber versions)
Field 15: Capacitance tolerance
Field 16: Packing
Field 17 - 18: Lead length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
M	**K**	**S**	**2**	**C**	**0**	**2**	**1**	**0**	**0**	**1**	**A**	**0**	**0**	**M**	**S**	**S**	**D**
MKS 2				63 VDC		0.01 µF				2.5 x 6.5 x 7.2		-		20%	bulk	6 -2	

Type description:

SMD-PET	= SMDT
SMD-PPS	= SMDI
FKP 02	= FKP0
MKS 02	= MKS0
FKS 2	= FKS2
FKP 2	= FKP2
MKS 2	= MKS2
MKP 2	= MKP2
FKS 3	= FKS3
FKP 3	= FKP3
MKS 4	= MKS4
MKP 4	= MKP4
MKP 10	= MKP1
FKP 4	= FKP4
FKP 1	= FKP1
MKP-X2	= MKX2
MKP-X2 R	= MKXR
MKP-Y2	= MKY2
MP 3-X2	= MPX2
MP 3-X1	= MPX1
MP 3-Y2	= MPY2
MP 3R-Y2	= MPRY
Snubber MKP	= SNMP
Snubber FKP	= SNFP
GTO MKP	= GTOM
DC-LINK MKP 4	= DCP4
DC-LINK MKP 5	= DCP5
DC-LINK MKP 6	= DCP6
DC-LINK HC	= DCH_
SuperCap C	= SCSC
SuperCap MC	= SCMC
SuperCap R	= SCSR
SuperCap MR	= SCMR

Rated voltage:

2.5 VDC	= A1
4 VDC	= A2
14 VDC	= A3
28 VDC	= A4
40 VDC	= A5
5 VDC	= A6
50 VDC	= B0
63 VDC	= C0
100 VDC	= D0
160 VDC	= E0
250 VDC	= F0
400 VDC	= G0
450 VDC	= H0
600 VDC	= I0
630 VDC	= J0
700 VDC	= K0
800 VDC	= L0
850 VDC	= M0
900 VDC	= N0
1000 VDC	= O1
1100 VDC	= P0
1200 VDC	= Q0
1250 VDC	= R0
1500 VDC	= S0
1600 VDC	= T0
2000 VDC	= U0
2500 VDC	= V0
3000 VDC	= W0
4000 VDC	= X0
6000 VDC	= Y0
250 VAC	= 0W
275 VAC	= 1W
300 VAC	= 2W
400 VAC	= 3W
440 VAC	= 4W
500 VAC	= 5W
...	

Capacitance:

22 pF	= 0022
47 pF	= 0047
100 pF	= 0100
150 pF	= 0150
220 pF	= 0220
330 pF	= 0330
470 pF	= 0470
680 pF	= 0680
1000 pF	= 1100
1500 pF	= 1150
2200 pF	= 1220
3300 pF	= 1330
4700 pF	= 1470
6800 pF	= 1680
0.01 µF	= 2100
0.022 µF	= 2220
0.047 µF	= 2470
0.1 µF	= 3100
0.22 µF	= 3220
0.47 µF	= 3470
1 µF	= 4100
2.2 µF	= 4220
4.7 µF	= 4470
10 µF	= 5100
22 µF	= 5220
47 µF	= 5470
100 µF	= 6100
220 µF	= 6220
1 F	= A010
2.5 F	= A025
50 F	= A500
100 F	= B100
110 F	= B110
600 F	= B600
1200 F	= C120
...	

Size:

4.8 x 3.3 x 3 Size 1812	= KA
4.8 x 3.3 x 4 Size 1812	= KB
5.7 x 5.1 x 3.5 Size 2220	= QA
5.7 x 5.1 x 4.5 Size 2220	= QB
7.2 x 6.1 x 3 Size 2824	= TA
7.2 x 6.1 x 5 Size 2824	= TB
10.2 x 7.6 x 5 Size 4030	= VA
12.7 x 10.2 x 6 Size 5040	= XA
15.3 x 13.7 x 7 Size 6054	= YA
2.5 x 7 x 4.6 PCM 2.5	= 0B
3 x 7.5 x 4.6 PCM 2.5	= 0C
2.5 x 6.5 x 7.2 PCM 5	= 1A
3 x 7.5 x 7.2 PCM 5	= 1B
2.5 x 7 x 10 PCM 7.5	= 2A
3 x 8.5 x 10 PCM 7.5	= 2B
3 x 9 x 13 PCM 10	= 3A
4 x 9 x 13 PCM 10	= 3C
5 x 11 x 18 PCM 15	= 4B
6 x 12.5 x 18 PCM 15	= 4C
5 x 14 x 26.5 PCM 22.5	= 5A
6 x 15 x 26.5 PCM 22.5	= 5B
9 x 19 x 31.5 PCM 27.5	= 6A
11 x 21 x 31.5 PCM 27.5	= 6B
9 x 19 x 41.5 PCM 37.5	= 7A
11 x 22 x 41.5 PCM 37.5	= 7B
94 x 49 x 182 DCH_	= H0
94 x 77 x 182 DCH_	= H1
...	

Special features:

Standard	= 00
Version A1	= 1A
Version A1.1.1	= 1B
Version A1.2	= 1C
...	

Tolerance:

20%	= M
10%	= K
5%	= J
2.5%	= H
1%	= E
...	

Packing:

AMMO H16.5 340 x 340	= A
AMMO H16.5 490 x 370	= B
AMMO H18.5 340 x 340	= C
AMMO H18.5 490 x 370	= D
REEL H16.5 360	= F
REEL H16.5 500	= H
REEL H18.5 360	= I
REEL H18.5 500	= J
ROLL H16.5	= N
ROLL H18.5	= O
BLISTER W12 180	= P
BLISTER W12 330	= Q
BLISTER W16 330	= R
BLISTER W24 330	= T
Bulk Standard	= S
TPS Standard	= Y
...	

Lead length (untaped)

3.5 ±0.5	= C9
6 -2	= SD
16 ±1	= P1
...	

The data on this page is not complete and serves only to explain the part number system. Part number information is listed on the pages of the respective WIMA range.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

WIMA:

FKP2O100471D00JSSD MKP1F044706J00KSSD MKP4J041506F00KSSD DCP4G064009JD4KSSD
FKS2D011501A00KSSD FKS2D016801A00KSSD FKP1Y022207E00KSSD MKP4F041005D00KSSD
MKS4C042204C00KSSD SMDTD02100QA00KP00 MKP2D031001F00KI00 FKS2D013301A00JSSD
MKP1G032205D00JSSD MKP1O121004B00KSSD MKP4F034704D00KSSD SMDTD02470QA00KP00
FKP4G021004B00JSSD MKP4O126804F00KSSD FKP2D021001I00HC00 MKP1J024705B00JSSD
MKP4F051007F00KSSD MKP4O123304C00KSSD MKS0C021500B00KSSD MKS2D024701A00JSSD
MKS4G031002E00KSSD MKX2AW34705F00KSSD MKP1J031505F00KSSD MKP2J013301B00KSSD
MKS4D041002F00KSSD FKP1T031007E00JSSD