



标 记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修 改 REVISE	日 期 DATE	核 准 APPROVE








3D VIEW



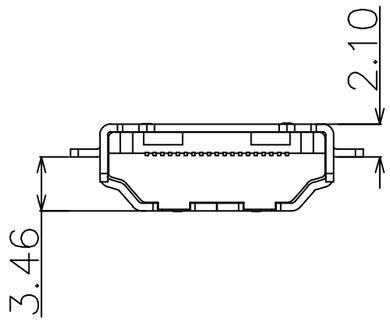

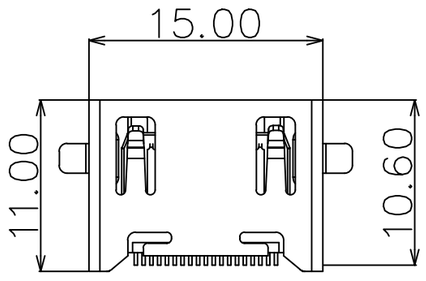

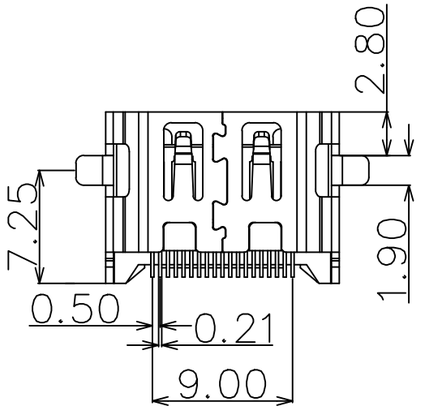

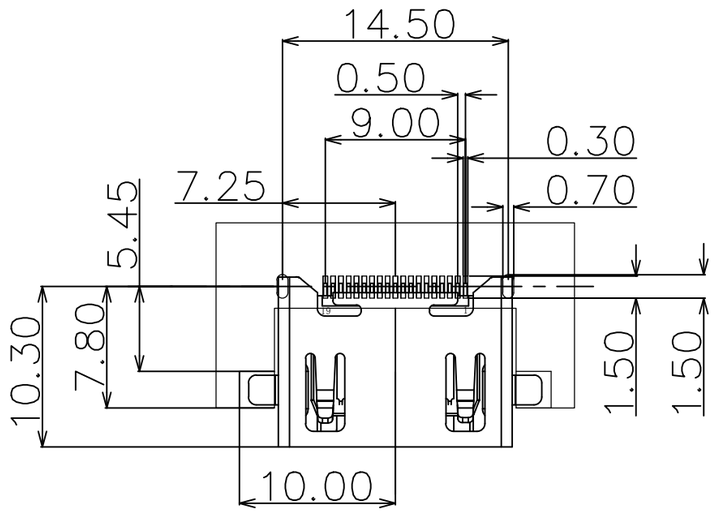

RECOMMEND PCB LAYOUT
TOLERANCE: ±0.05 T=1.2
TOP VIEW

NOTES
1. MATERIAL:
   1.1. HOUSING: LCP, COLOR IS BLACK;
   1.2. CONTACT: BRASS (H65 T=0.20mm);
   1.3. SHELL: COLD ROLLED IRON (SPCC,T=0.5mm);
2. FINISH:
   2.1. TERMINAL:
        CONTACT AREA: GOLD PLATED G/Fu";
        SOLDER AREA: PLATED OVER TIN;
   2.2. SHELL: NI PLATED OVER ALL ;
4. ELECTRICAL:
   4.1. VOLTAGE RATING: 40 VAC RMS;
   4.2. CURRENT RATING: 0.5 AMP;
   4.3. CONTACT RESISTANCE: 30mΩ MAX.;
   4.4. WITHSTAND VOLTAGE: 500 VAC RMS
        50(60)Hz,1MIN.;
   4.5. INSULATION RESISTANCE: 100MEGOHMS MIN
        @500V DC;
5. MECHANICAL:
   5.1. MATING FORCE: 44.1N MAX.;
   5.2. UNMATING FORCE: 9.8N MIN;
   5.3. OPERATING LIFE: 10000 CYCLES MIN.;
6. ENVIRONMENTAL:
   6.1. STORAGE TEMPERATURE RANGE: −40°C~+85°C
   6.2. OPERATION TEMPERATURE RANGE: −25°C~+70°C;
7. SALT SPRAY TEST: 24H(Salt spray test 24hours for gold plated area and 8 hours for tin plated area)

序 号	品 名	材 质	电镀/颜色	备 注
3	外壳	铁	镀镍	
2	接触	铜	镀金	
1	基座	LCP	黑色	

深圳市虹成电子有限公司

品 名 TITLE	HDMI座		
料 号 PART NO	HC-HDMI0019T-3		
比 列 SCALE	1:1		
单 位 UNIT	MM	制 图 DRAW	AhYe
张 数 PART NO	1 OF 1	审 核 CHECKED	夏操云
版 本 REV	A	批 准 APPROVE	赵亮亮

UNLESS OTHERWISE, GENERAL TOLERANCE:
X.xxx ±0.10
X.xx ±0.20
X.x ±0.30
ANGULAR:
X.xx° ±1°
X.x° ±3°
X.° ±5°

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HC:

HC-PHB2.0-2x4AW HC-PM200-4.3H-2x8PS HC-PM254-8.5H-1x21PZ HC-PZ254-11.5L-2x18PZ HC-PZ254-13.8L-1x6PWA HC-FPC-0.5-24P-FH20 HC-FPC-0.5-40P-FH20 HC-FPC-0.5-50P-FHH20 HCZZ0451-4 HC-USB3.0-L175-2X1-J HC-USB3.0-L257-J HCZZ0032-6 HCZZ0514-6 HC-FPC-0.5-6P-CSH20 HC-PHB2.0-2x5A HC-PZ127-7.2L-2x3PS HC-PZ254-11.5L-1x20PZ HC-USB2.0-L100-093P HCZZ0001-2 HCZZ0001-6 HCZZ0451-6 HC-FPC-0.5-10P-FH20 HC-USB3.0-C26 HC-PM254-5.0H-2x10PZ HC-PM200-4.3H-2x20PZ HC-PM254-8.5H-2x20PS HC-USB3.0-C34-P HC-PZ254-11.5L-1x10PZ HCZZ0530-4 HCZZ0576-5