
- **Member of the Texas Instruments *Widebus*™ Family**
- ***EPIC*™ (Enhanced-Performance Implanted CMOS) Submicron Process**
- **ESD Protection Exceeds 2000 V Per MIL-STD-883, Method 3015; Exceeds 200 V Using Machine Model (C = 200 pF, R = 0)**
- **Latch-Up Performance Exceeds 250 mA Per JEDEC Standard JESD-17**
- **All Outputs Have Equivalent 26-Ω Series Resistors, So No External Resistors Are Required**
- **Bus Hold on Data Inputs Eliminates the Need for External Pullup/Pulldown Resistors**
- **Package Options Include Plastic Shrink Small-Outline (DL) and Thin Shrink Small-Outline (DGG) Packages**

DGG OR DL PACKAGE
(TOP VIEW)

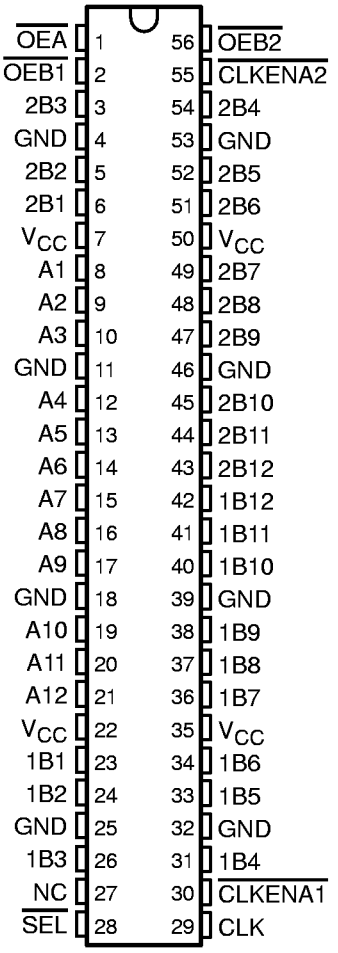

NC – No internal connection

description

This 12-bit to 24-bit registered bus exchanger is designed for 2.3-V to 3.6-V V_{CC} operation.

The SN74ALVCHR162269 is used in applications where two separate ports must be multiplexed onto, or demultiplexed from, a single port. It is particularly suitable as an interface between synchronous DRAMs and high-speed microprocessors.

Data is stored in the internal B-port registers on the low-to-high transition of the clock ($\overline{CLK}$) input when the appropriate clock enable ($\overline{CLKENA}$) inputs are low. Proper control of these inputs allows two sequential 12-bit words to be presented as a 24-bit word on the B port. For data transfer in the B-to-A direction, a single storage register is provided. The select ($\overline{SEL}$) line selects 1B or 2B data for the A outputs. The register on the A output permits the fastest possible data transfer, thus extending the period that the data is valid on the bus. The control terminals are registered so that all transactions are synchronous with CLK. Data flow is controlled by the active-low output enables ($\overline{OEA}$, $\overline{OEB1}$, and $\overline{OEB2}$).

To ensure the high-impedance state during power up or power down, $\overline{OE}$ should be tied to V_{CC} through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

Active bus-hold circuitry is provided to hold unused or floating data inputs at a valid logic level.

All outputs are designed to sink up to12 mA and include 26-Ω resistors to reduce overshoot and undershoot.

The SN74ALVCHR162269 is characterized for operation from –40°C to 85°C.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

EPIC and Widebus are trademarks of Texas Instruments Incorporated.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 1997, Texas Instruments Incorporated

Function Tables

OUTPUT ENABLE

INPUTS			OUTPUTS	
CLK	$\overline{OEA}$	$\overline{OEB}$	A	1B, 2B
↑	H	H	Z	Z
↑	H	L	Z	Active
↑	L	H	Active	Z
↑	L	L	Active	Active

A-TO-B STORAGE ($\overline{OEB}$ = L)

INPUTS				OUTPUTS	
$\overline{CLKENA1}$	$\overline{CLKENA2}$	CLK	A	1B	2B
L	H	↑	L	L	$2B_0$†
L	H	↑	H	H	$2B_0$†
L	L	↑	L	L	L
L	L	↑	H	H	H
H	L	↑	L	$1B_0$†	L
H	L	↑	H	$1B_0$†	H
H	H	X	X	$1B_0$†	$2B_0$†


† Output level before the indicated steady-state input conditions were established

B-TO-A STORAGE ($\overline{OEA}$ = L)

INPUTS				OUTPUT
CLK	$\overline{SEL}$	1B	2B	A
X	H	X	X	A_0†
X	L	X	X	A_0†
↑	H	L	X	L
↑	H	H	X	H
↑	L	X	L	L
↑	L	X	H	H

† Output level before the indicated steady-state input conditions were established

logic diagram (positive logic)

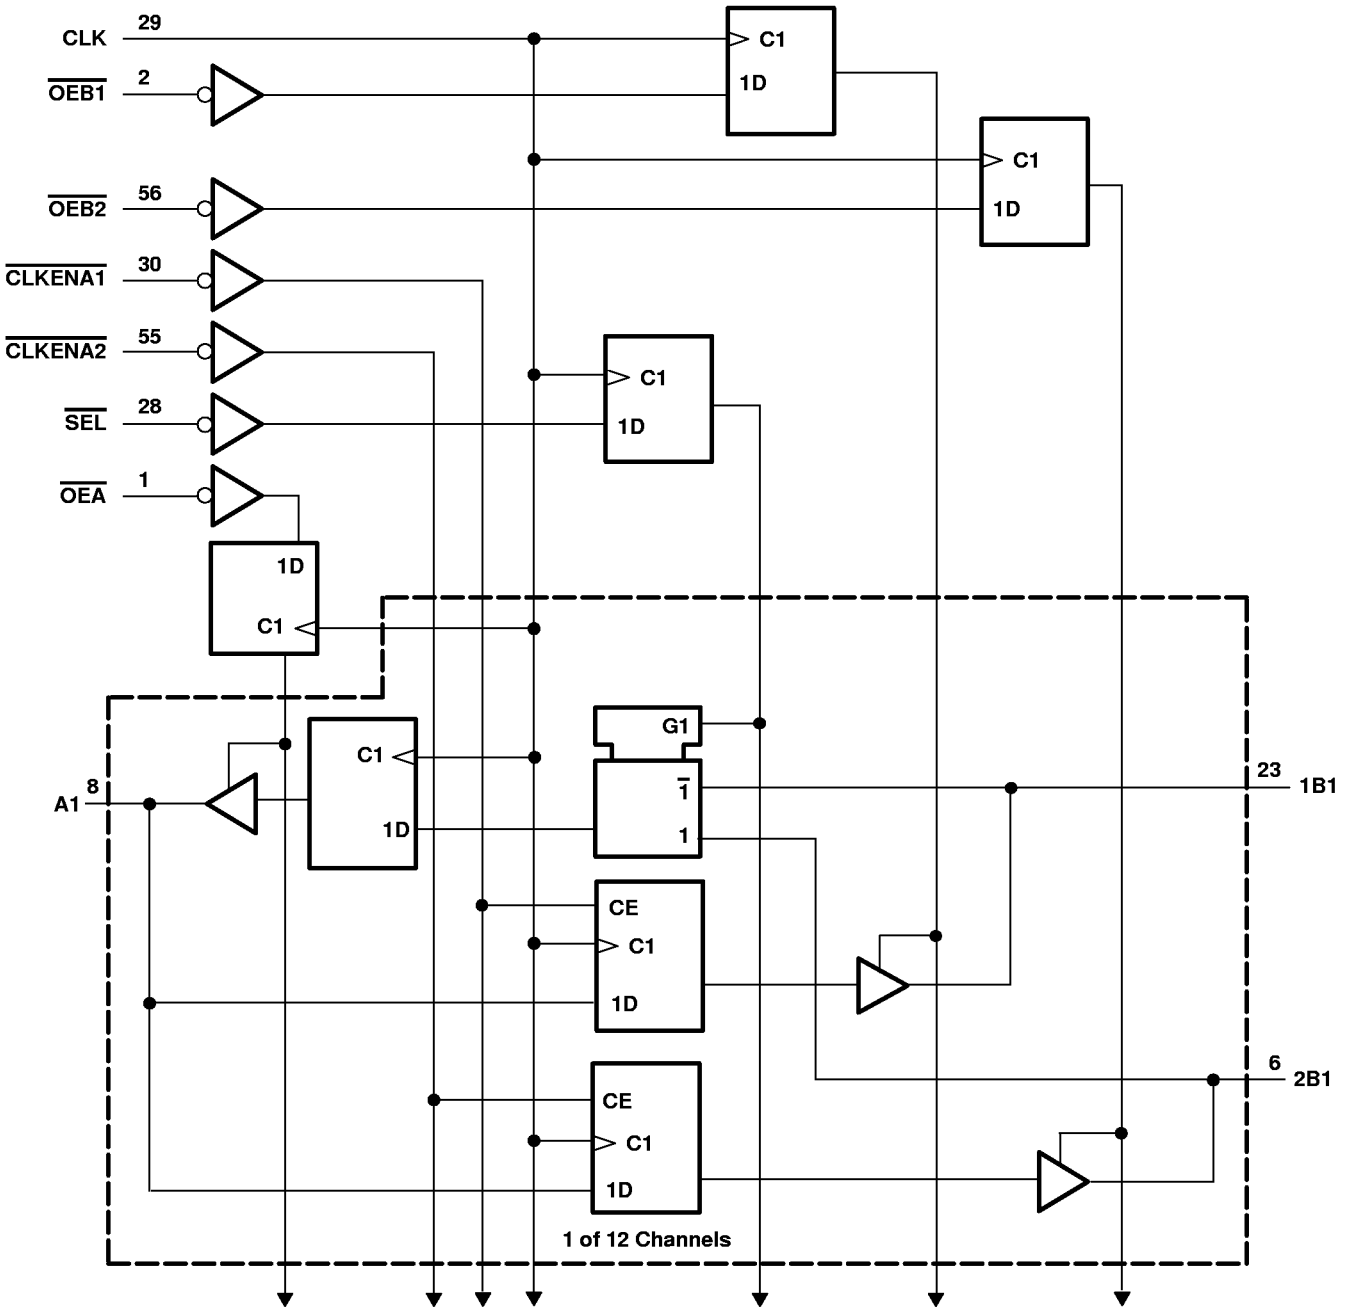

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage range, V_{CC} . . . . . –0.5 V to 4.6 V
Input voltage range, VI: Except I/O ports (see Note 1) . . . . . –0.5 V to 4.6 V
I/O ports (see Notes 1 and 2) . . . . . –0.5 V to V_{CC} + 0.5 V
Output voltage range, V_O (see Notes 1 and 2) . . . . . –0.5 V to V_{CC} + 0.5 V
Input clamp current, I_{IK} (V_I < 0) . . . . . –50 mA
Output clamp current, I_{OK} (V_O < 0 or V_O > V_{CC}) . . . . . ±50 mA
Continuous output current, I_O (V_O = 0 to V_{CC}) . . . . . ±50 mA
Continuous current through each V_{CC} or GND . . . . . ±100 mA
Maximum power dissipation at T_A = 55°C (in still air) (see Note 3): DGG package . . . . . 1 W
DL package . . . . . 1.4 W
Storage temperature range, T_{stg} . . . . . –65°C to 150°C

† Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. The input and output negative-voltage ratings may be exceeded if the input and output clamp-current ratings are observed.
2. This value is limited to 4.6 V maximum.
3. The maximum package power dissipation is calculated using a junction temperature of 150°C and a board trace length of 750 mils. For more information, refer to the *Package Thermal Considerations* application note in the *ABT Advanced BiCMOS Technology Data Book*.

recommended operating conditions (see Note 4)

			MIN	MAX	UNIT
V_{CC}	Supply voltage		2.3	3.6	V
V_{IH}	High-level input voltage	V_{CC} = 2.3 V to 2.7 V	1.7		V
		V_{CC} = 2.7 V to 3.6 V	2		
V_{IL}	Low-level input voltage	V_{CC} = 2.3 V to 2.7 V		0.7	V
		V_{CC} = 2.7 V to 3.6 V		0.8	
V_I	Input voltage		0	V_{CC}	V
V_O	Output voltage		0	V_{CC}	V
I_{OH}	High-level output current	V_{CC} = 2.3 V		–6	mA
		V_{CC} = 2.7 V		–8	
		V_{CC} = 3 V		–12	
I_{OL}	Low-level output current	V_{CC} = 2.3 V		6	mA
		V_{CC} = 2.7 V		8	
		V_{CC} = 3 V		12	
$\Delta t/\Delta v$	Input transition rise or fall rate		0	10	ns/V
T_A	Operating free-air temperature		–40	85	°C

NOTE 4: Unused control inputs must be held high or low to prevent them from floating.

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS		V_{CC}	MIN	TYP†	MAX	UNIT
V_{OH}		I_{OH} = −100 μA		2.3 V to 3.6 V	V_{CC}−0.2			V
		I_{OH} = −4 mA	V_{IH} = 1.7 V	2.3 V	1.9			
			V_{IH} = 2 V	2.7 V	2.2			
		I_{OH} = −6 mA	V_{IH} = 1.7 V	2.3 V	1.7			
			V_{IH} = 2 V	3 V	2.4			
		I_{OH} = −8 mA,	V_{IH} = 2 V	2.7 V	2			
		I_{OH} = −12 mA,	V_{IH} = 2 V	3 V	2			
V_{OL}		I_{OL} = 100 μA		2.3 V to 3.6 V			0.2	V
		I_{OL} = 4 mA	V_{IL} = 0.7 V	2.3 V			0.4	
			V_{IL} = 0.8 V	2.7 V			0.4	
		I_{OL} = 6 mA	V_{IL} = 0.7 V	2.3 V			0.55	
			V_{IL} = 0.8 V	3 V			0.55	
		I_{OL} = 8 mA,	V_{IL} = 0.8 V	2.7 V			0.6	
		I_{OL} = 12 mA,	V_{IL} = 0.8 V	3 V			0.8	
I_I		V_I = V_{CC} or GND		3.6 V			±5	μA
$I_{I(hold)}$		V_I = 0.7 V		2.3 V	45			μA
		V_I = 1.7 V			−45			
		V_I = 0.8 V		3 V	75			
		V_I = 2 V			−75			
		V_I = 0 to 3.6 V		3.6 V			±500	
I_{OZ}§		V_O = V_{CC} or GND‡		3.6 V			±10	μA
I_{CC}		V_I = V_{CC} or GND,	I_O = 0	3.6 V			40	μA
ΔI_{CC}		One input at V_{CC} – 0.6 V,	Other inputs at V_{CC} or GND	3 V to 3.6 V			750	μA
C_i	Control inputs	V_I = V_{CC} or GND		3.3 V		3.5		pF
C_{io}	A or B ports	V_O = V_{CC} or GND		3.3 V		9		pF

† All typical values are at V_{CC} = 3.3 V, T_A = 25°C.
‡ This is the bus-hold maximum dynamic current required to switch the input from one state to another.
§ For I/O ports, the parameter I_{OZ} includes the input leakage current.

timing requirements over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted)

			V_{CC} = 2.5 V ± 0.2 V		V_{CC} = 2.7 V		V_{CC} = 3.3 V ± 0.3 V		UNIT
			MIN	MAX	MIN	MAX	MIN	MAX	
f_{clock}	Clock frequency		0	135	0	135	0	135	MHz
t_w	Pulse duration, CLK high or low		3.3		3.3		3.3		ns
t_{su}	Setup time	A data before CLK↑	2		2		1.7		ns
		B data before CLK↑	2.2		2.1		1.8		
		$\overline{SEL}$ before CLK↑	1.6		1.6		1.3		
		$\overline{CLKENA1}$ or $\overline{CLKENA2}$ before CLK↑	1		1.2		0.9		
		$\overline{OE}$ before CLK↑	1.5		1.6		1.3		
t_h	Hold time	A data after CLK↑	0.7		0.6		0.6		ns
		B data after CLK↑	0.7		0.6		0.6		
		$\overline{SEL}$ after CLK↑	1.1		0.7		0.7		
		$\overline{CLKENA1}$ or $\overline{CLKENA2}$ after CLK↑	1		0.8		1.1		
		$\overline{OE}$ after CLK↑	0.8		0.8		0.8		


switching characteristics over recommended operating free-air temperature range, C_L = 50 pF (unless otherwise noted) (see Figures 1 and 2)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V_{CC} = 2.5 V ± 0.2 V		V_{CC} = 2.7 V		V_{CC} = 3.3 V ± 0.3 V		UNIT
			MIN	MAX	MIN	MAX	MIN	MAX	
f_{max}			135		135		135		MHz
t_{pd}	CLK	B	1.5	9.2		7.9	1.6	6.7	ns
		A	1.5	7.4		6.4	1.6	5.5	
t_{en}	CLK	B	1.5	8.8		7.3	1.6	6.6	ns
		A	1.5	8.5		6.8	1.6	6.4	
t_{dis}	CLK	B	1.8	8.7		7.5	1.6	6.5	ns
		A	1.9	8.1		7.4	1.6	6	

operating characteristics, T_A = 25°C


PARAMETER			TEST CONDITIONS	V_{CC} = 2.5 V ± 0.2 V	V_{CC} = 3.3 V ± 0.3 V	UNIT
				TYP	TYP	
C_{pd}	Power dissipation capacitance	Outputs enabled	C_L = 50 pF, f = 10 MHz	87	120	pF
		Outputs disabled		80.5	118	

PARAMETER MEASUREMENT INFORMATION
V_{CC} = 2.5 V ± 0.2 V

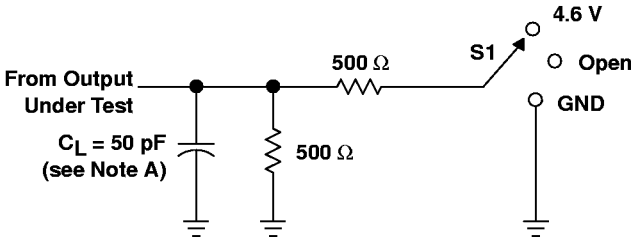


TEST	S1
t_{pd}	Open
t_{PLZ}/t_{PZL}	4.6 V
t_{PHZ}/t_{PZH}	GND


LOAD CIRCUIT

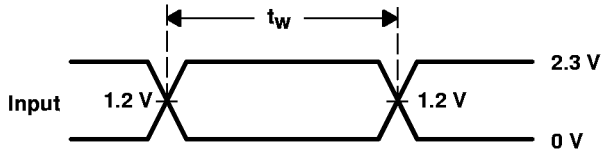


VOLTAGE WAVEFORMS
PULSE DURATION

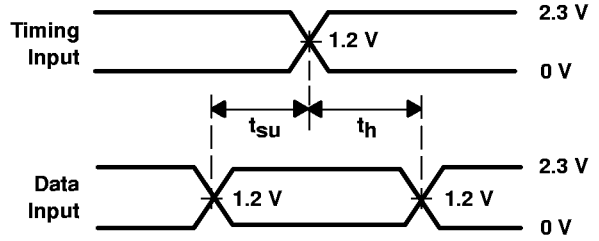

VOLTAGE WAVEFORMS
SETUP AND HOLD TIMES

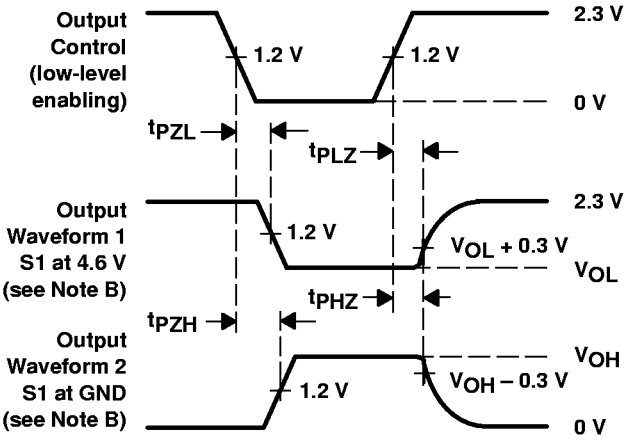

VOLTAGE WAVEFORMS
ENABLE AND DISABLE TIMES

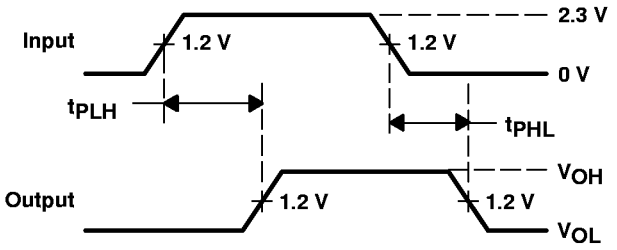


VOLTAGE WAVEFORMS
PROPAGATION DELAY TIMES

NOTES: A. C_L includes probe and jig capacitance.
B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
C. All input pulses are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z_O = 50 Ω, t_r ≤ 2.5 ns, t_f ≤ 2.5 ns.
D. The outputs are measured one at a time with one transition per measurement.
E. t_{PLZ} and t_{PHZ} are the same as t_{dis}.
F. t_{PZL} and t_{PZH} are the same as t_{en}.
G. t_{PLH} and t_{PHL} are the same as t_{pd}.


Figure 1. Load Circuit and Voltage Waveforms

PARAMETER MEASUREMENT INFORMATION
V_{CC} = 2.7 V AND 3.3 V ± 0.3 V

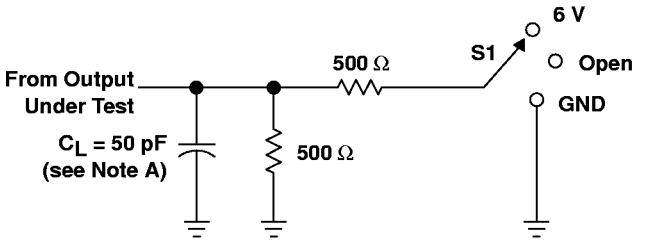


TEST	S1
t_{pd}	Open
t_{PLZ}/t_{PZL}	6 V
t_{PHZ}/t_{PZH}	GND


LOAD CIRCUIT

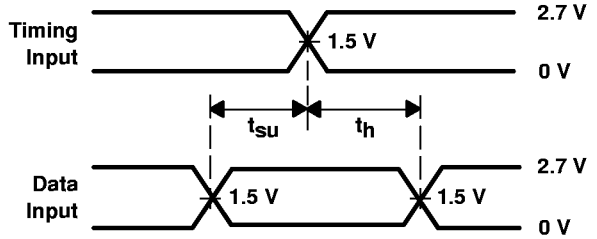


VOLTAGE WAVEFORMS
SETUP AND HOLD TIMES

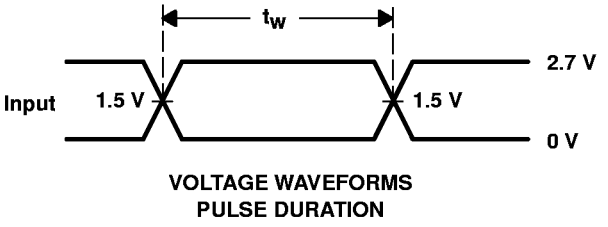

VOLTAGE WAVEFORMS
PULSE DURATION

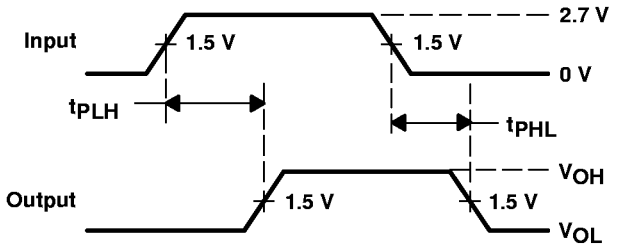

VOLTAGE WAVEFORMS
PROPAGATION DELAY TIMES

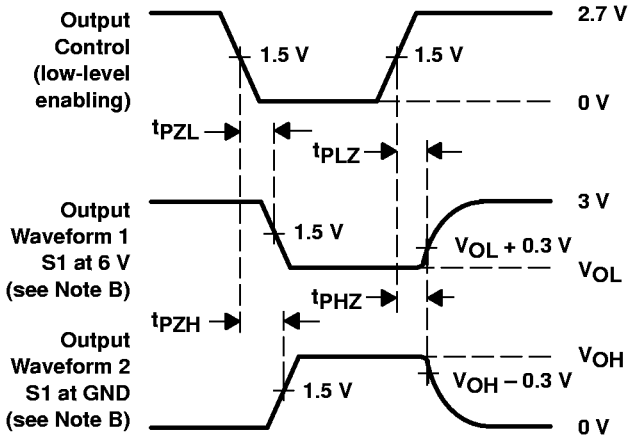

VOLTAGE WAVEFORMS
ENABLE AND DISABLE TIMES

NOTES: A. C_L includes probe and jig capacitance.
B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
C. All input pulses are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z_O = 50 Ω, t_r ≤ 2.5 ns, t_f ≤ 2.5 ns.
D. The outputs are measured one at a time with one transition per measurement.
E. t_{PLZ} and t_{PHZ} are the same as t_{dis}.
F. t_{PZL} and t_{PZH} are the same as t_{en}.
G. t_{PLH} and t_{PHL} are the same as t_{pd}.

Figure 2. Load Circuit and Voltage Waveforms

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Texas Instruments:

OPA643P TPS92200D2DDCR MSP430F5131IDA MSP430F5172IRSBT SN75LV4735DBLE TLC085CDR TPS71710DCKR TPS7A8018DRBR UCC27210DR CC2520RHDR OPT3101RHFR TCAN332DR MSP430G2332IN20 TPA6203A1DRBR TPS51125ARGER BQ24314DSGR ISO124U/1K OPA2541BM SN74GTL2006PWR MSP430F2112TRHBT MSP430G2403IPW28 UA9637ACPS ADS8344E MSP430F2001TRSAT PCM56U SN74LVCZ240APW LMV358MMX/NOPB TLV990-28PFB DS90C383MTDX/NOPB MSP430F47127IPZ