
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
© COPYRIGHT 2018 BY - TE CONNECTIVITY ALL RIGHTS RESERVED.

LOC	DIST
FX	00


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	BM	REVISED PER ECO-18-002641	22FEB2018	JMS	WW
	BN	REVISED PER ECO-19-007173	17MAY2019	RGV	WW
	BN1	REVISED PER ECO-20-012739	05OCT2020	AP	DR
	BN2	REV PER ECN-22-168671	18AUG2022	SMR	WW


KEYING OPTIONS
SCALE 2:1

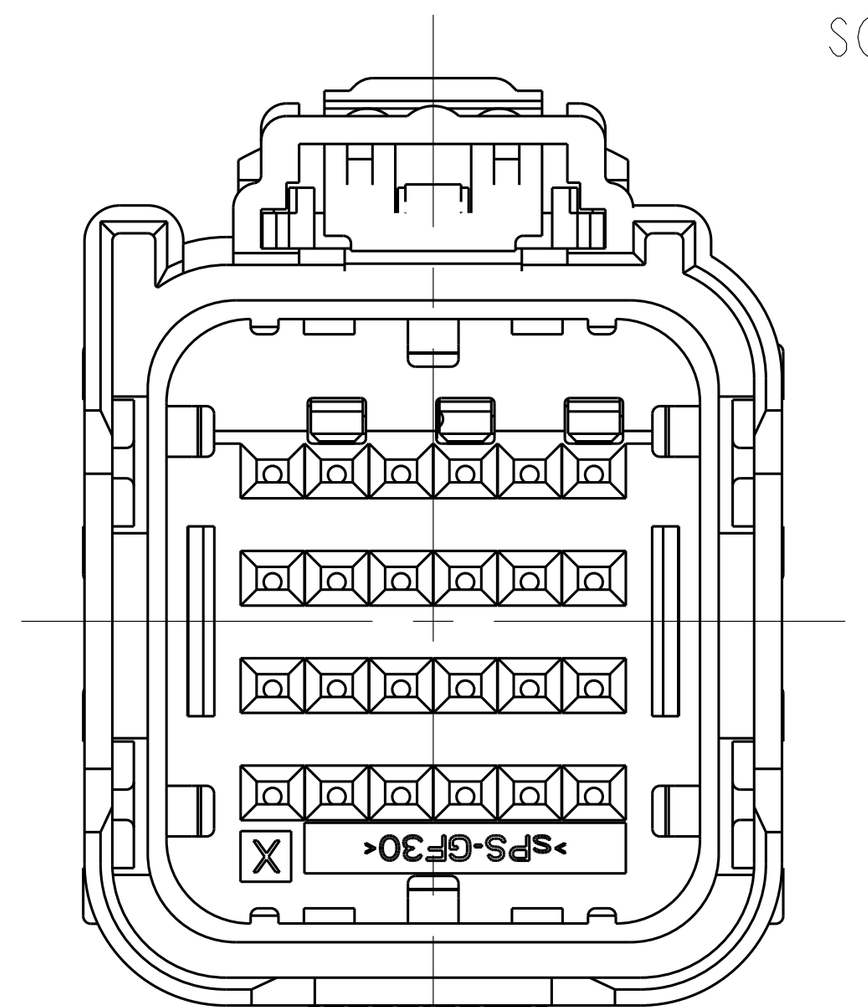


OPTION "A"

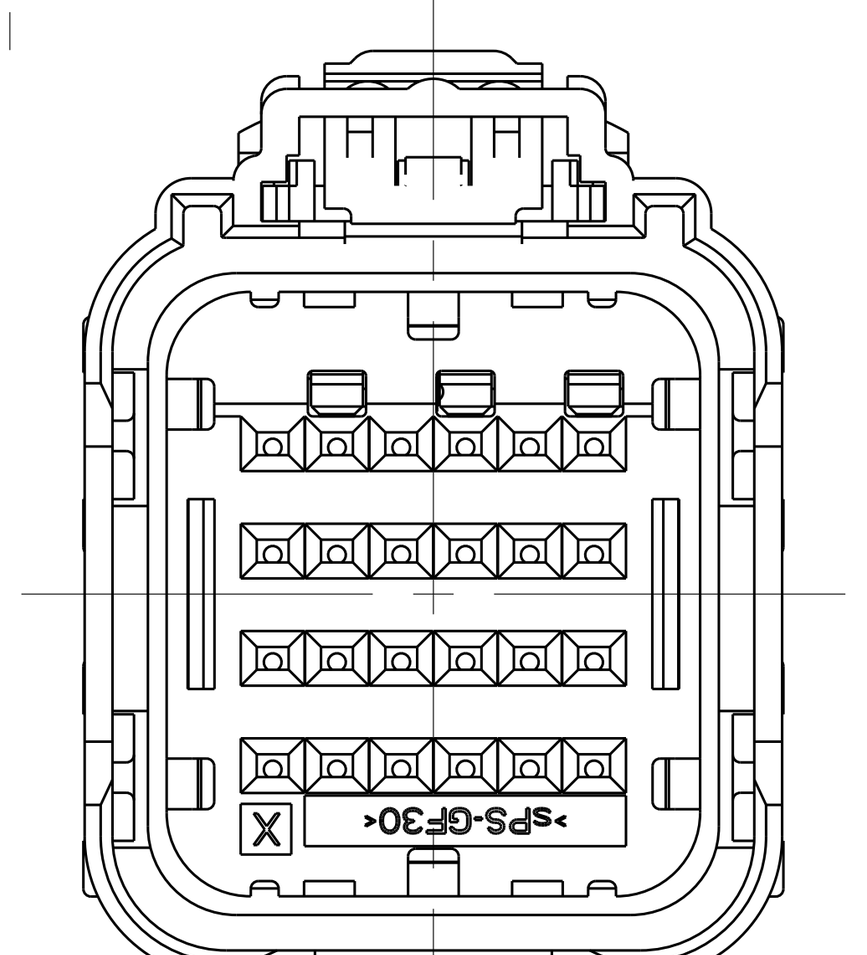


OPTION "B"

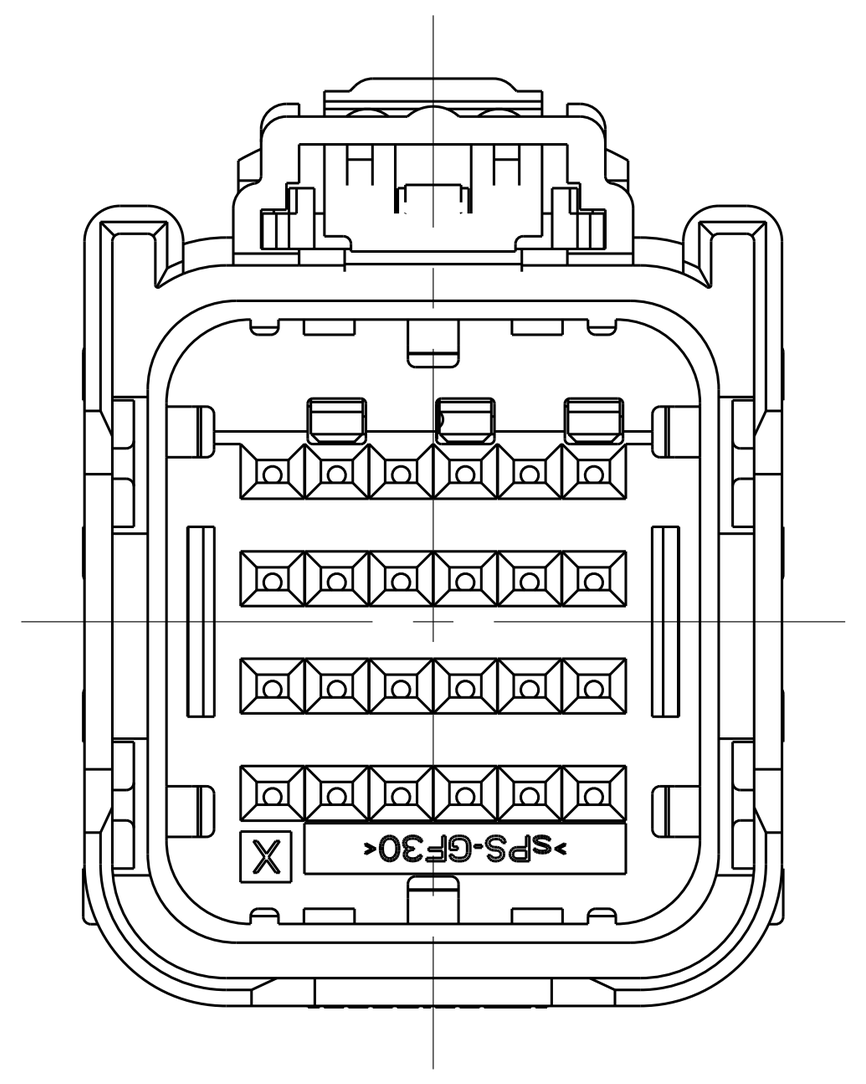


OPTION "C"

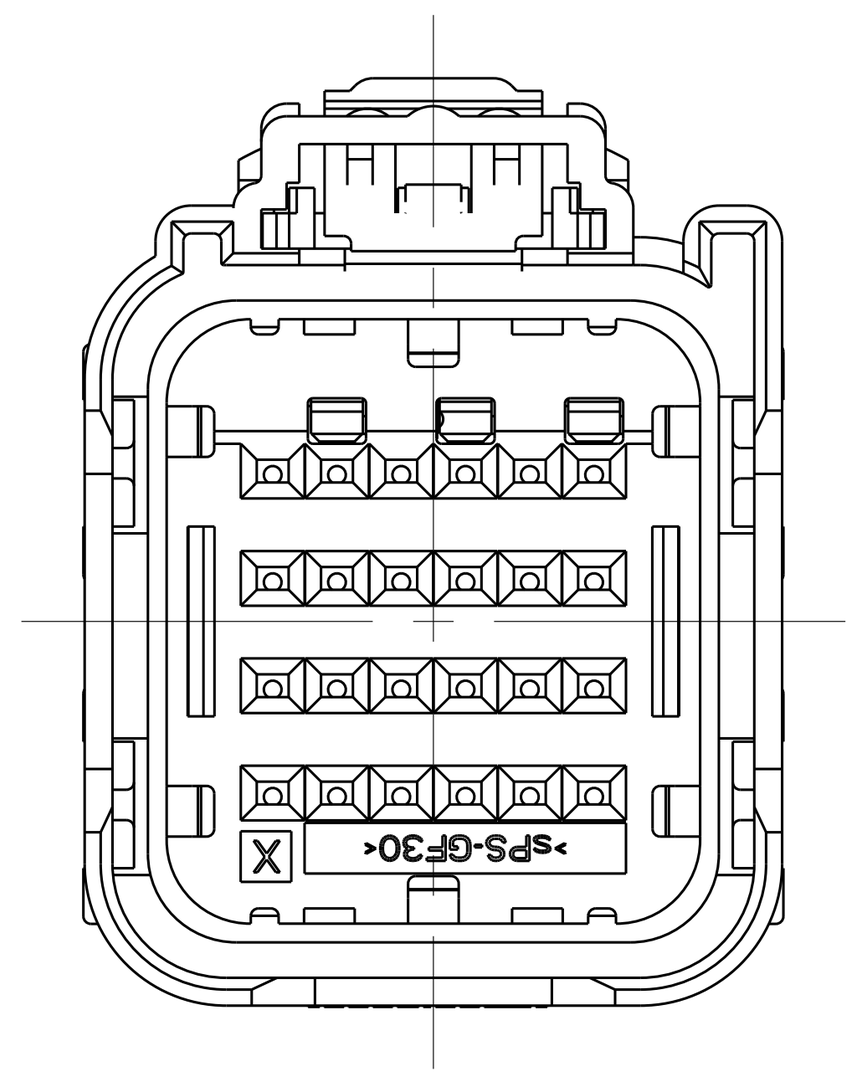


OPTION "D"

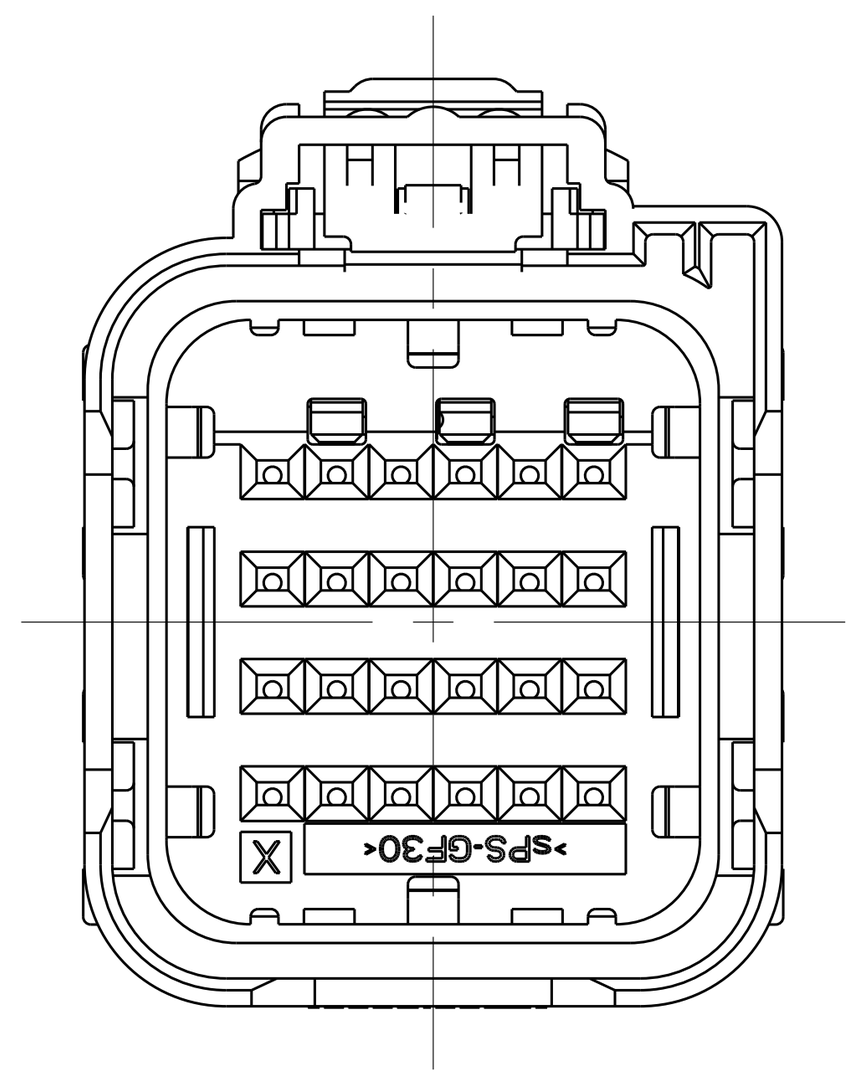


OPTION "E"

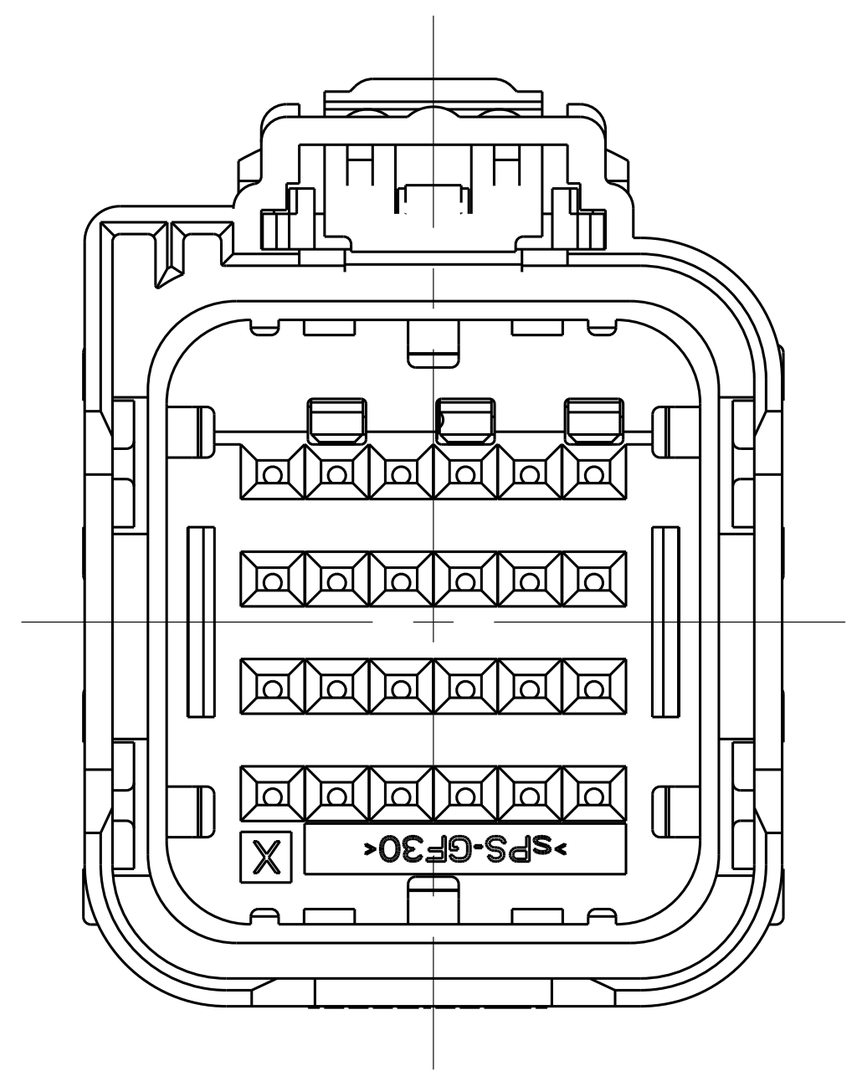


OPTION "F"

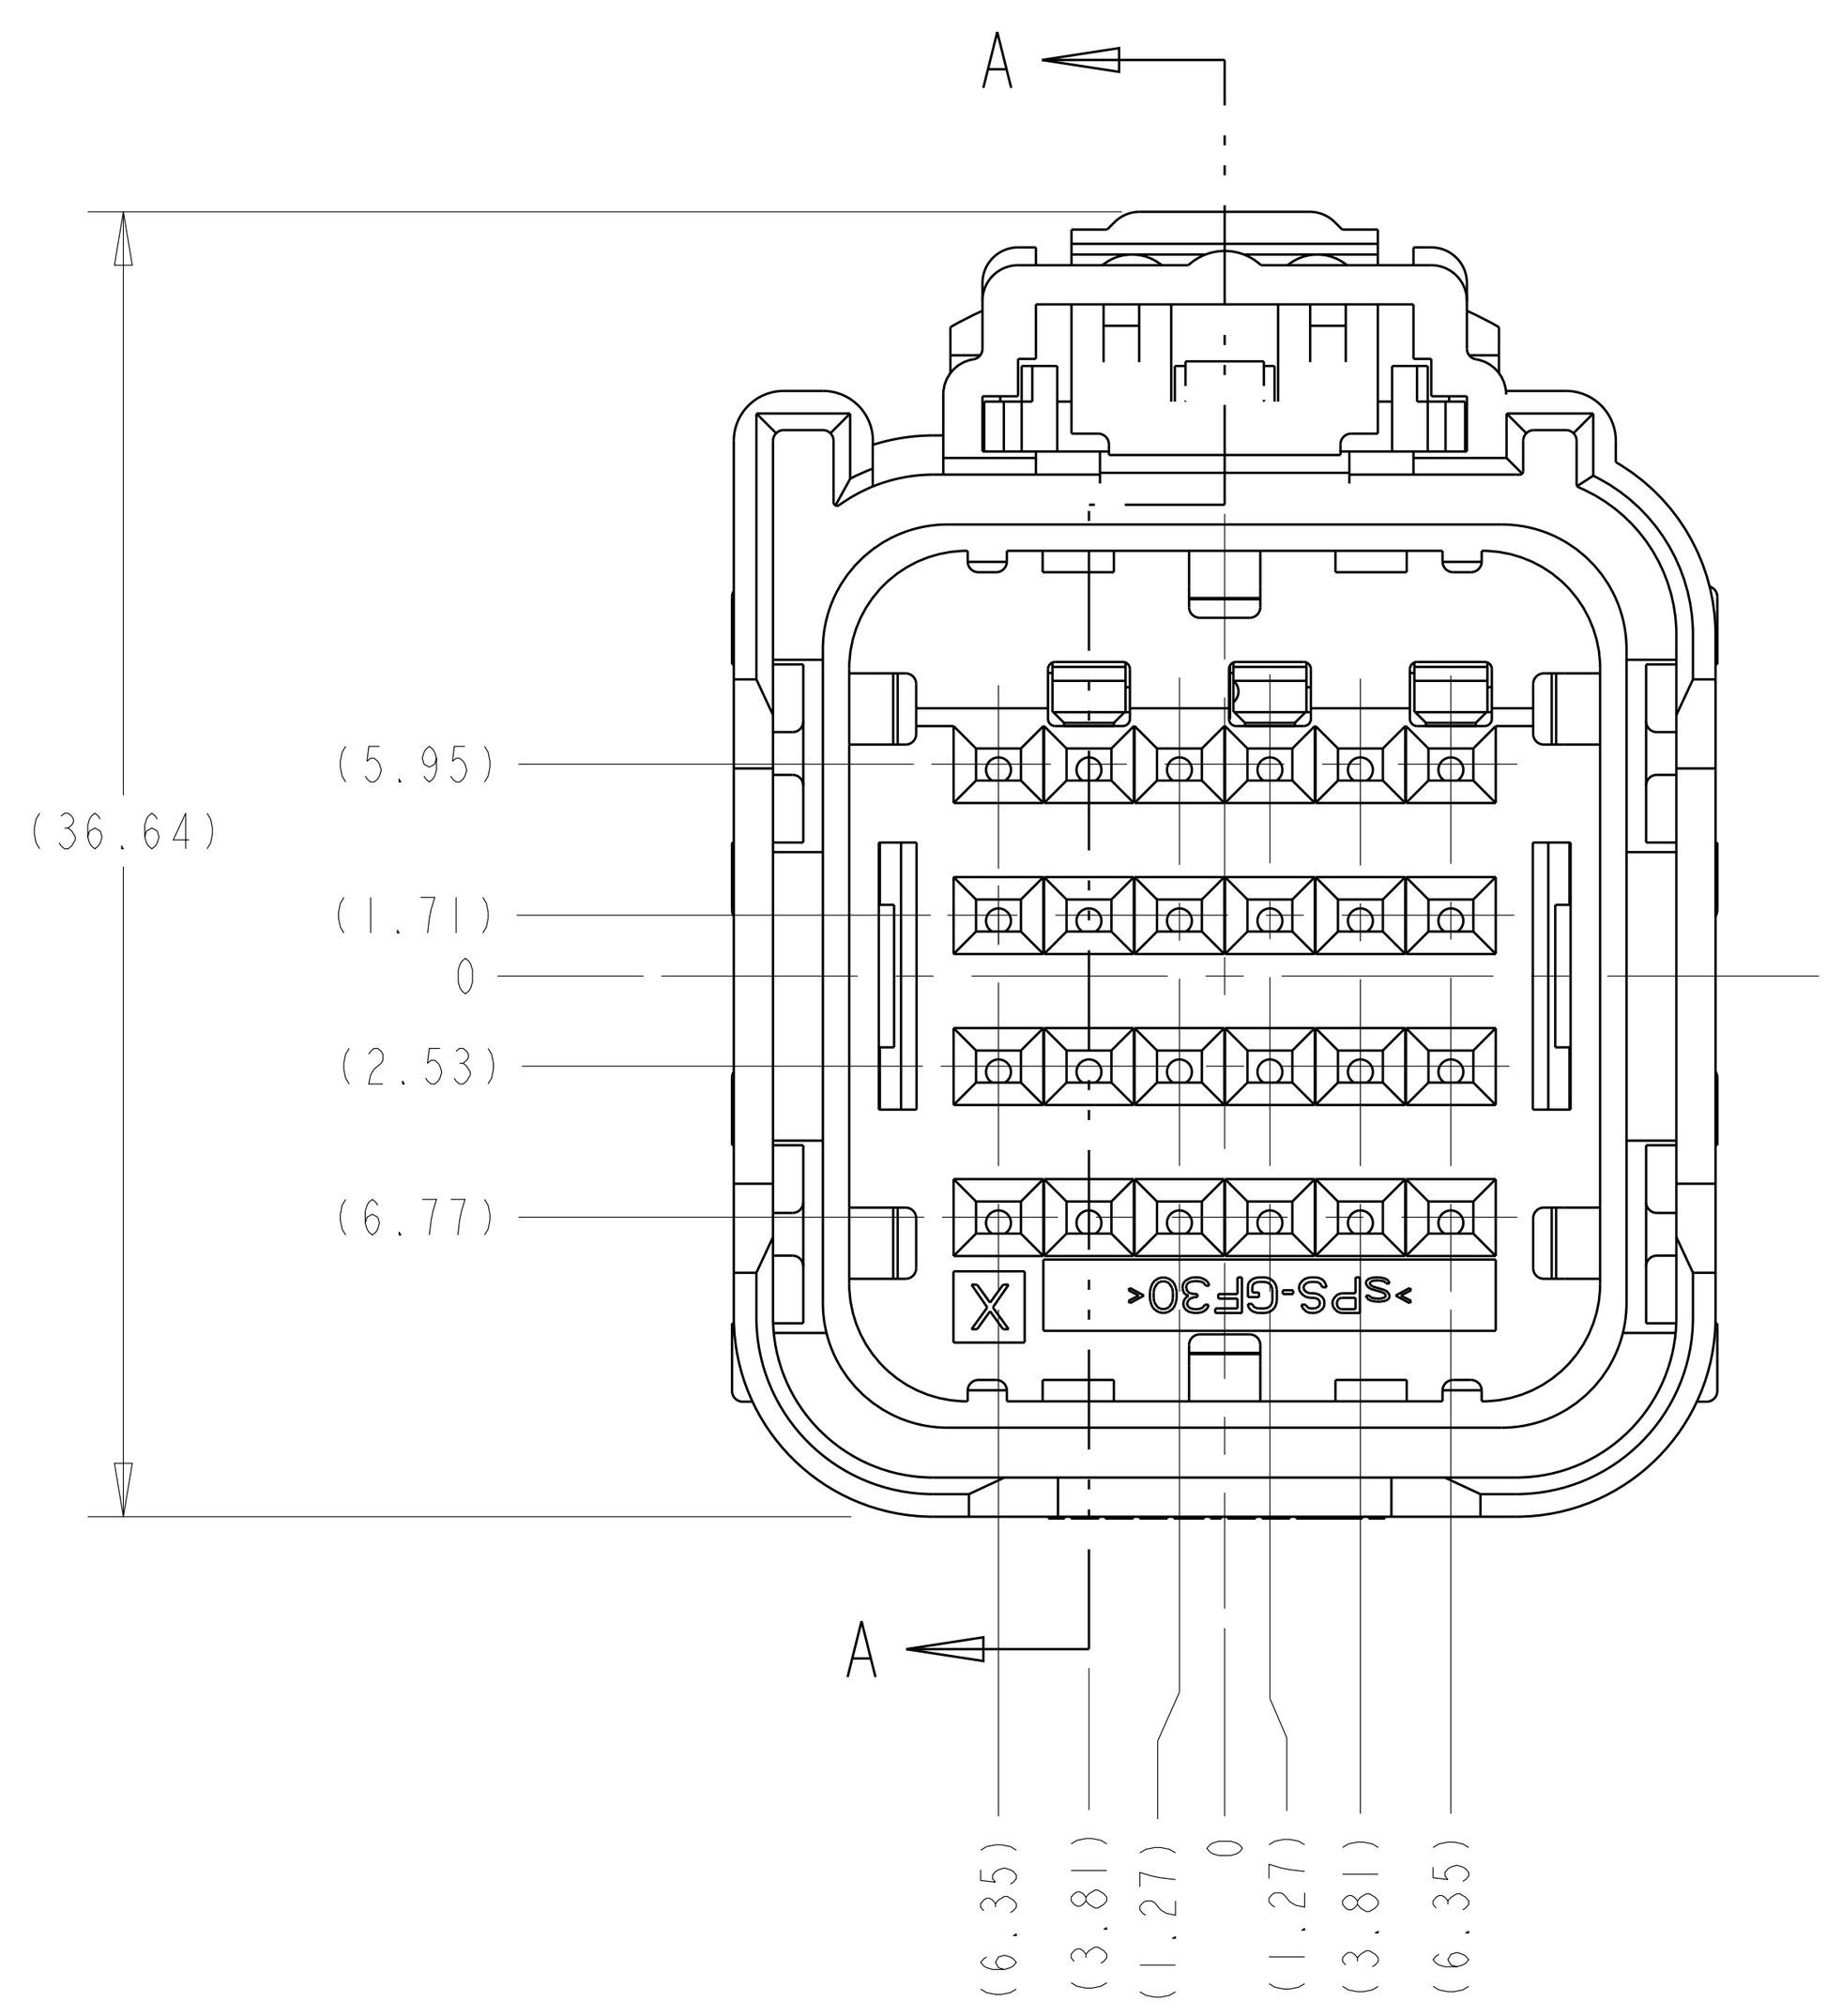


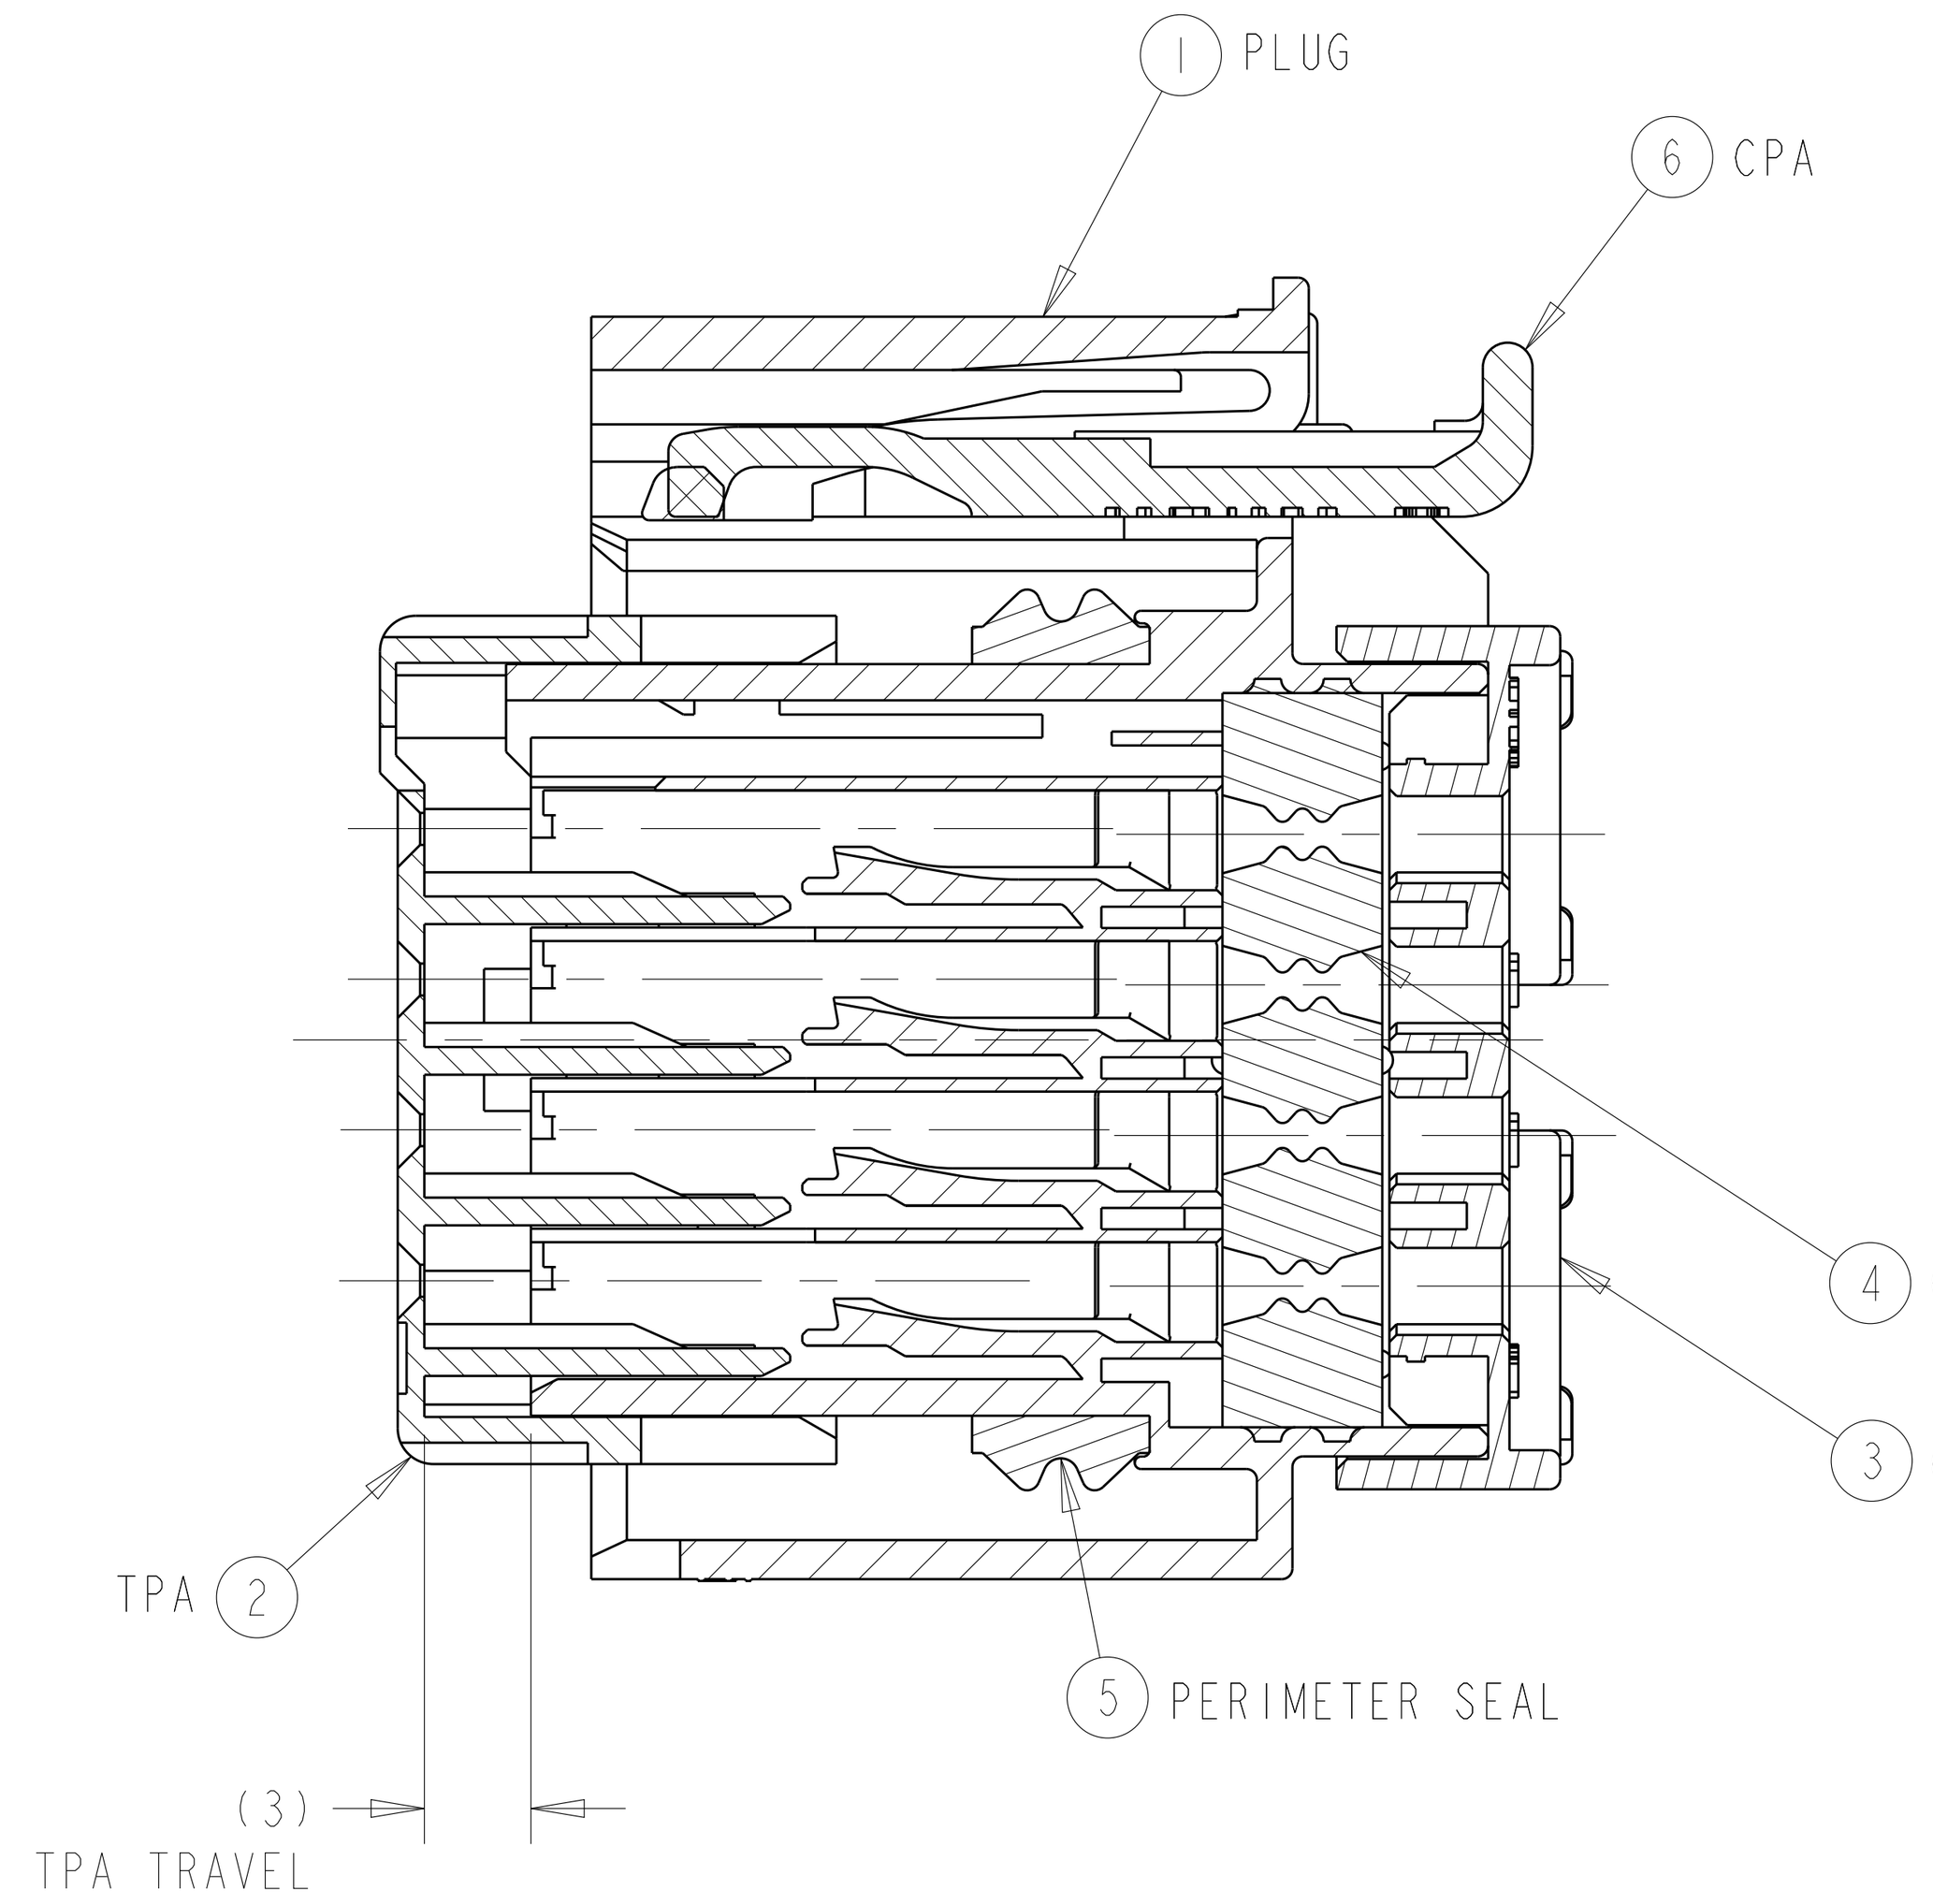


SECTION A-A
SHOWN WITH TPA IN
IT'S PRE-LOADED POSITION
(DELIVERY CONDTION)

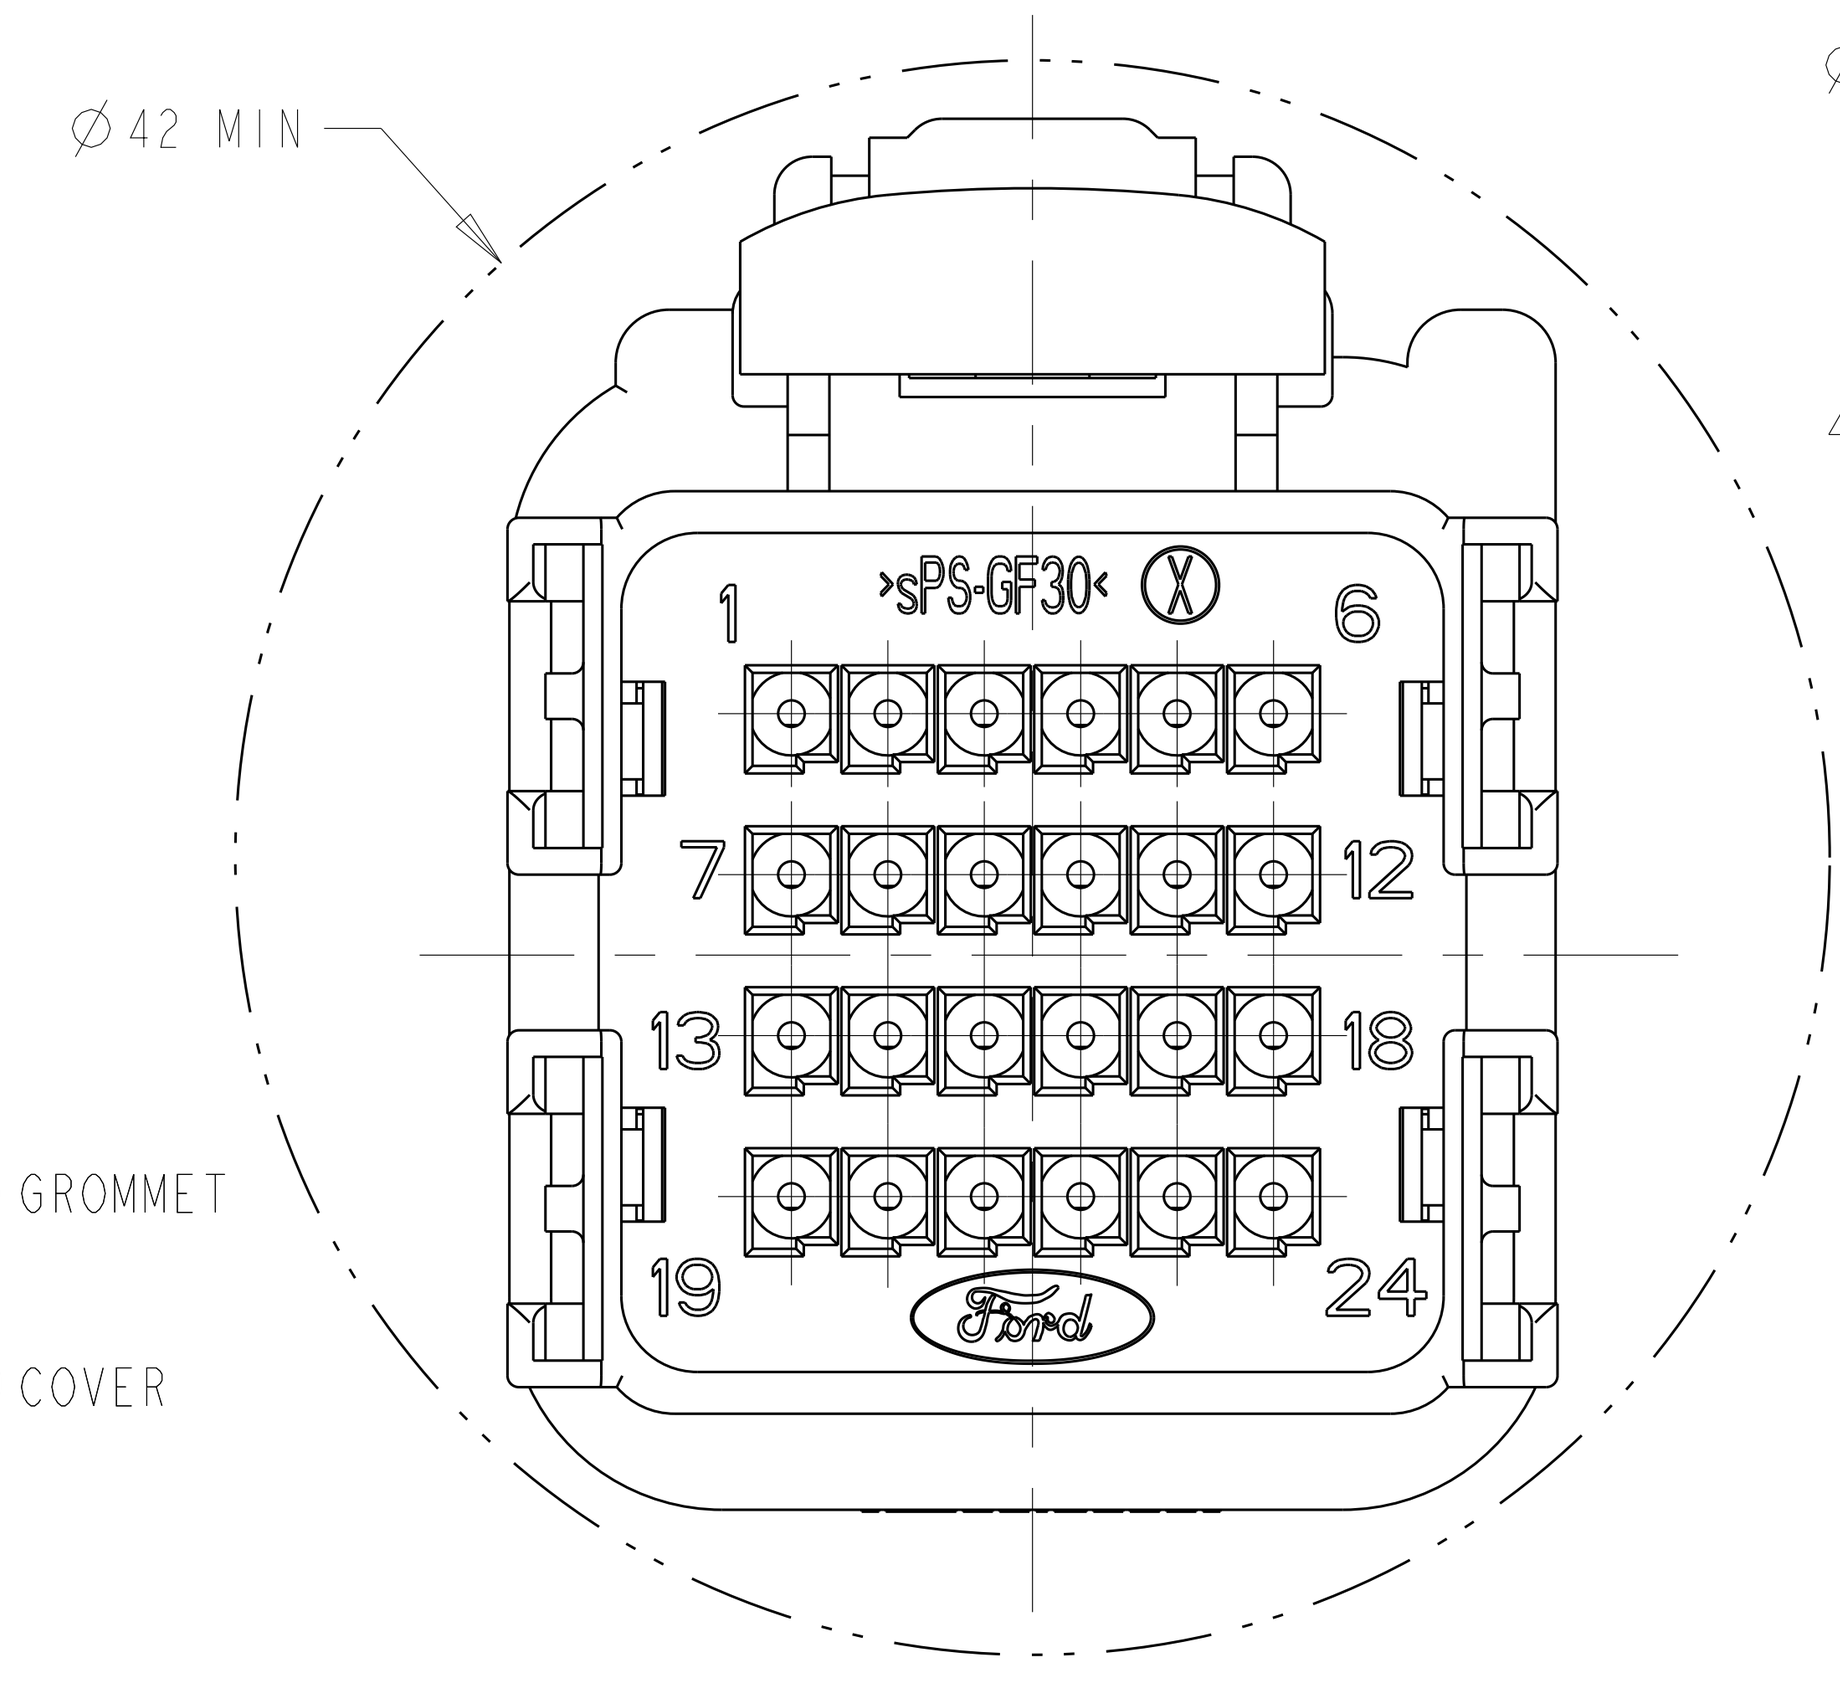



MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND

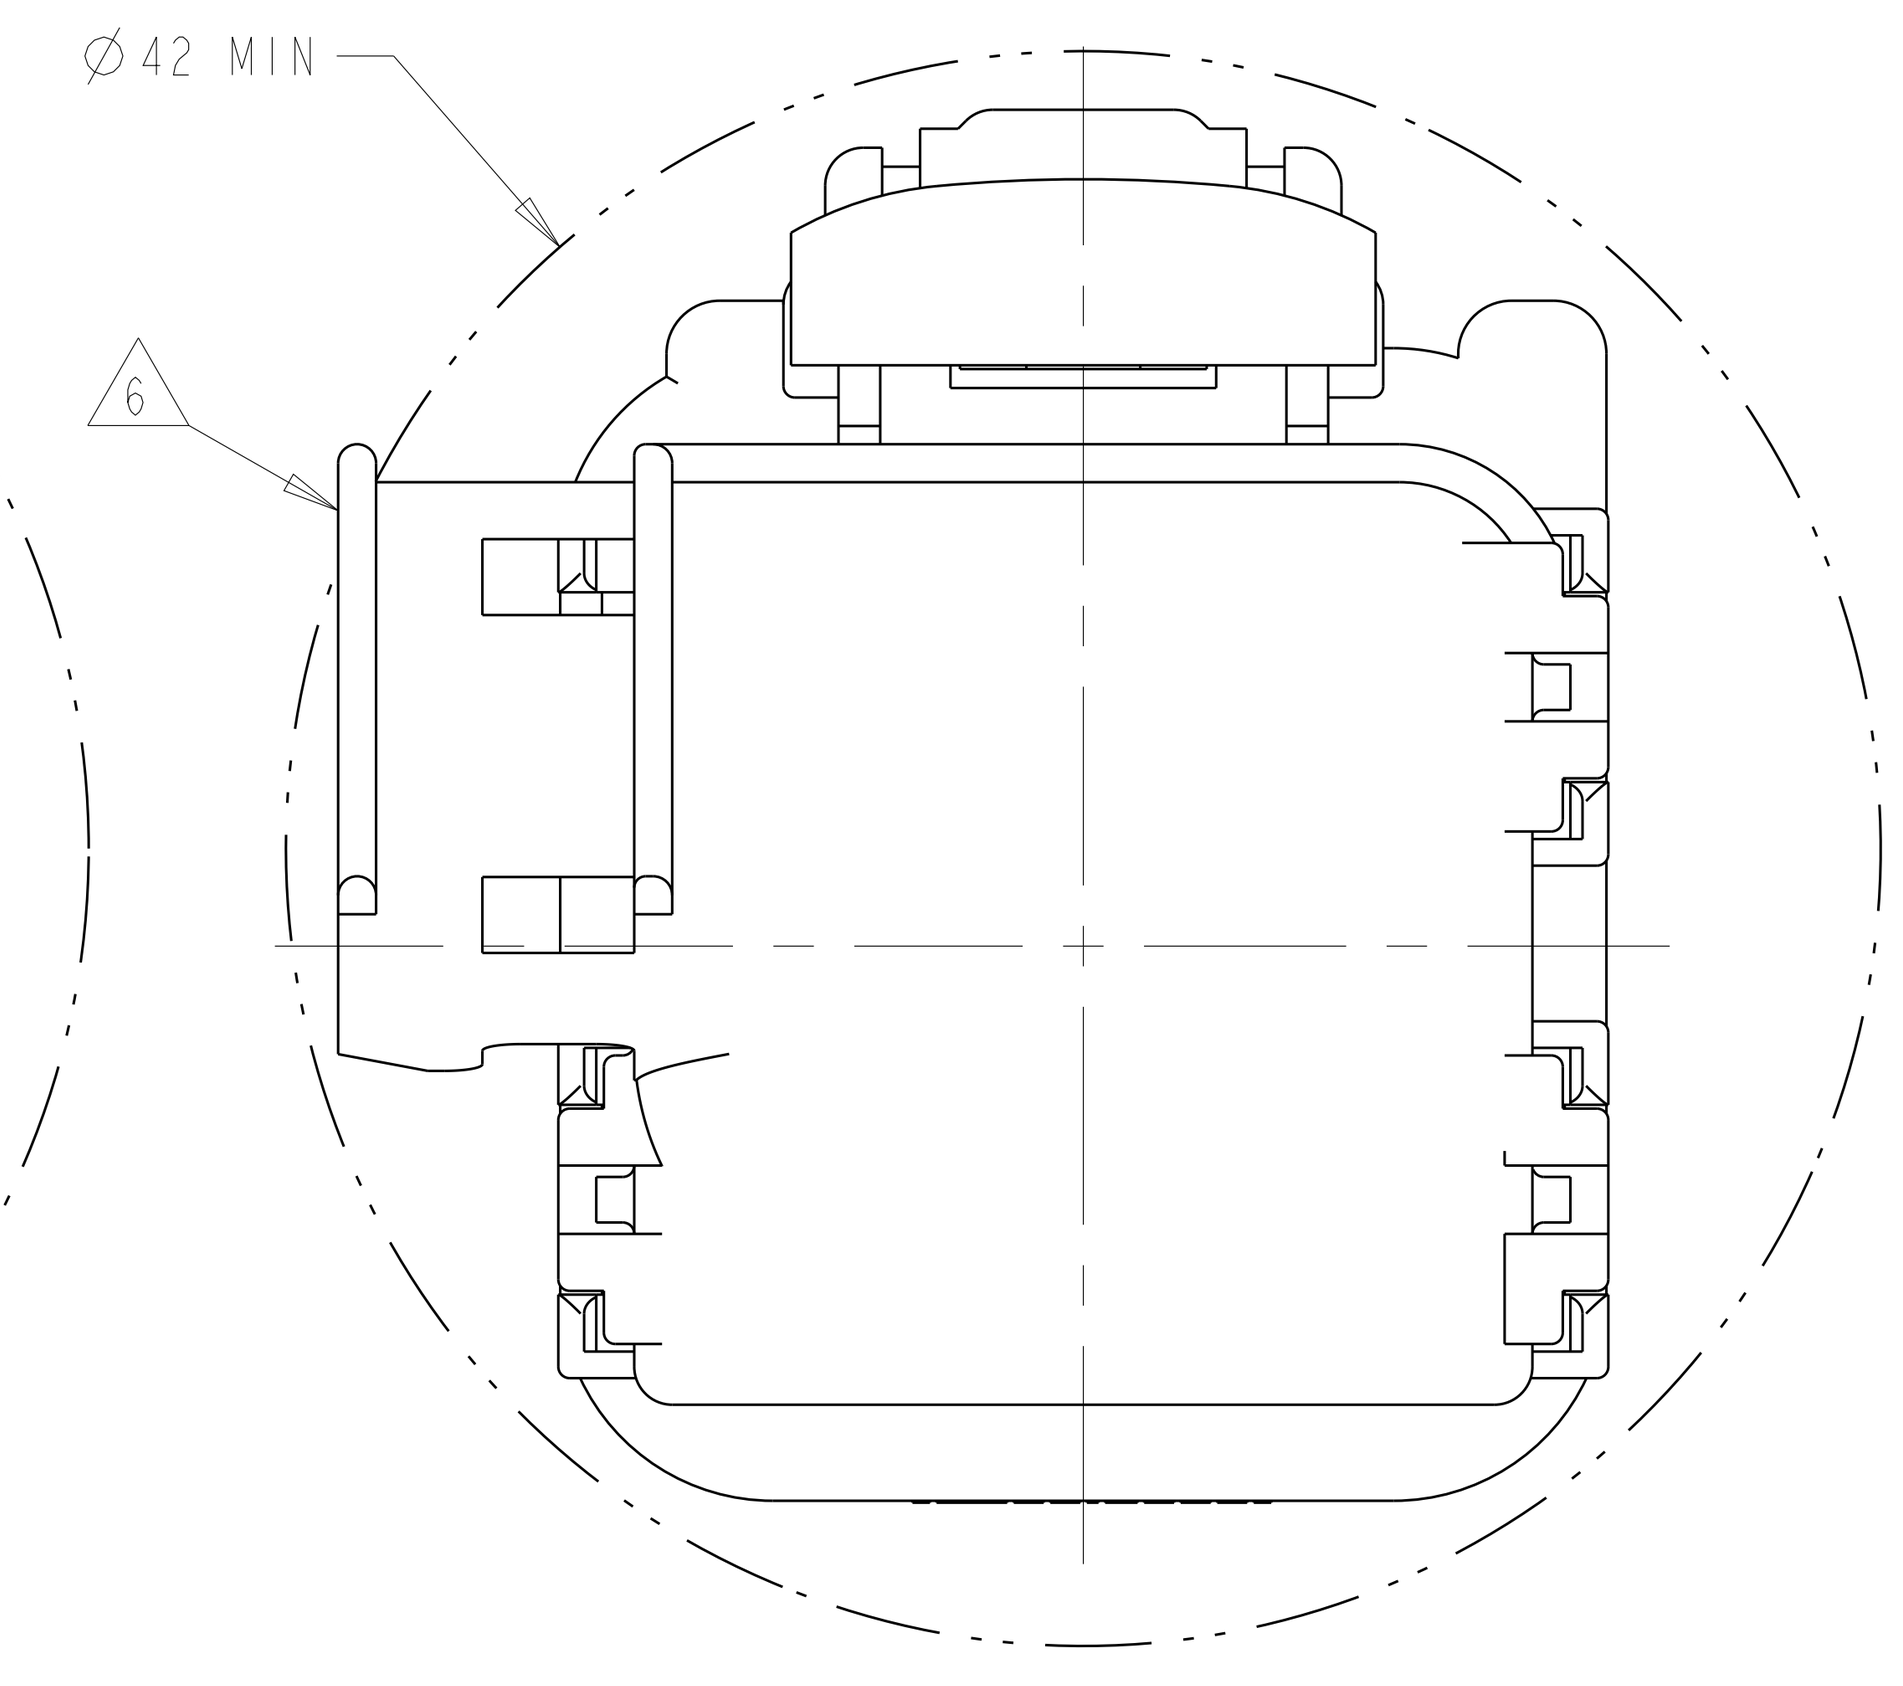

MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND
SHOWN WITH OPTION WIRESHIELD

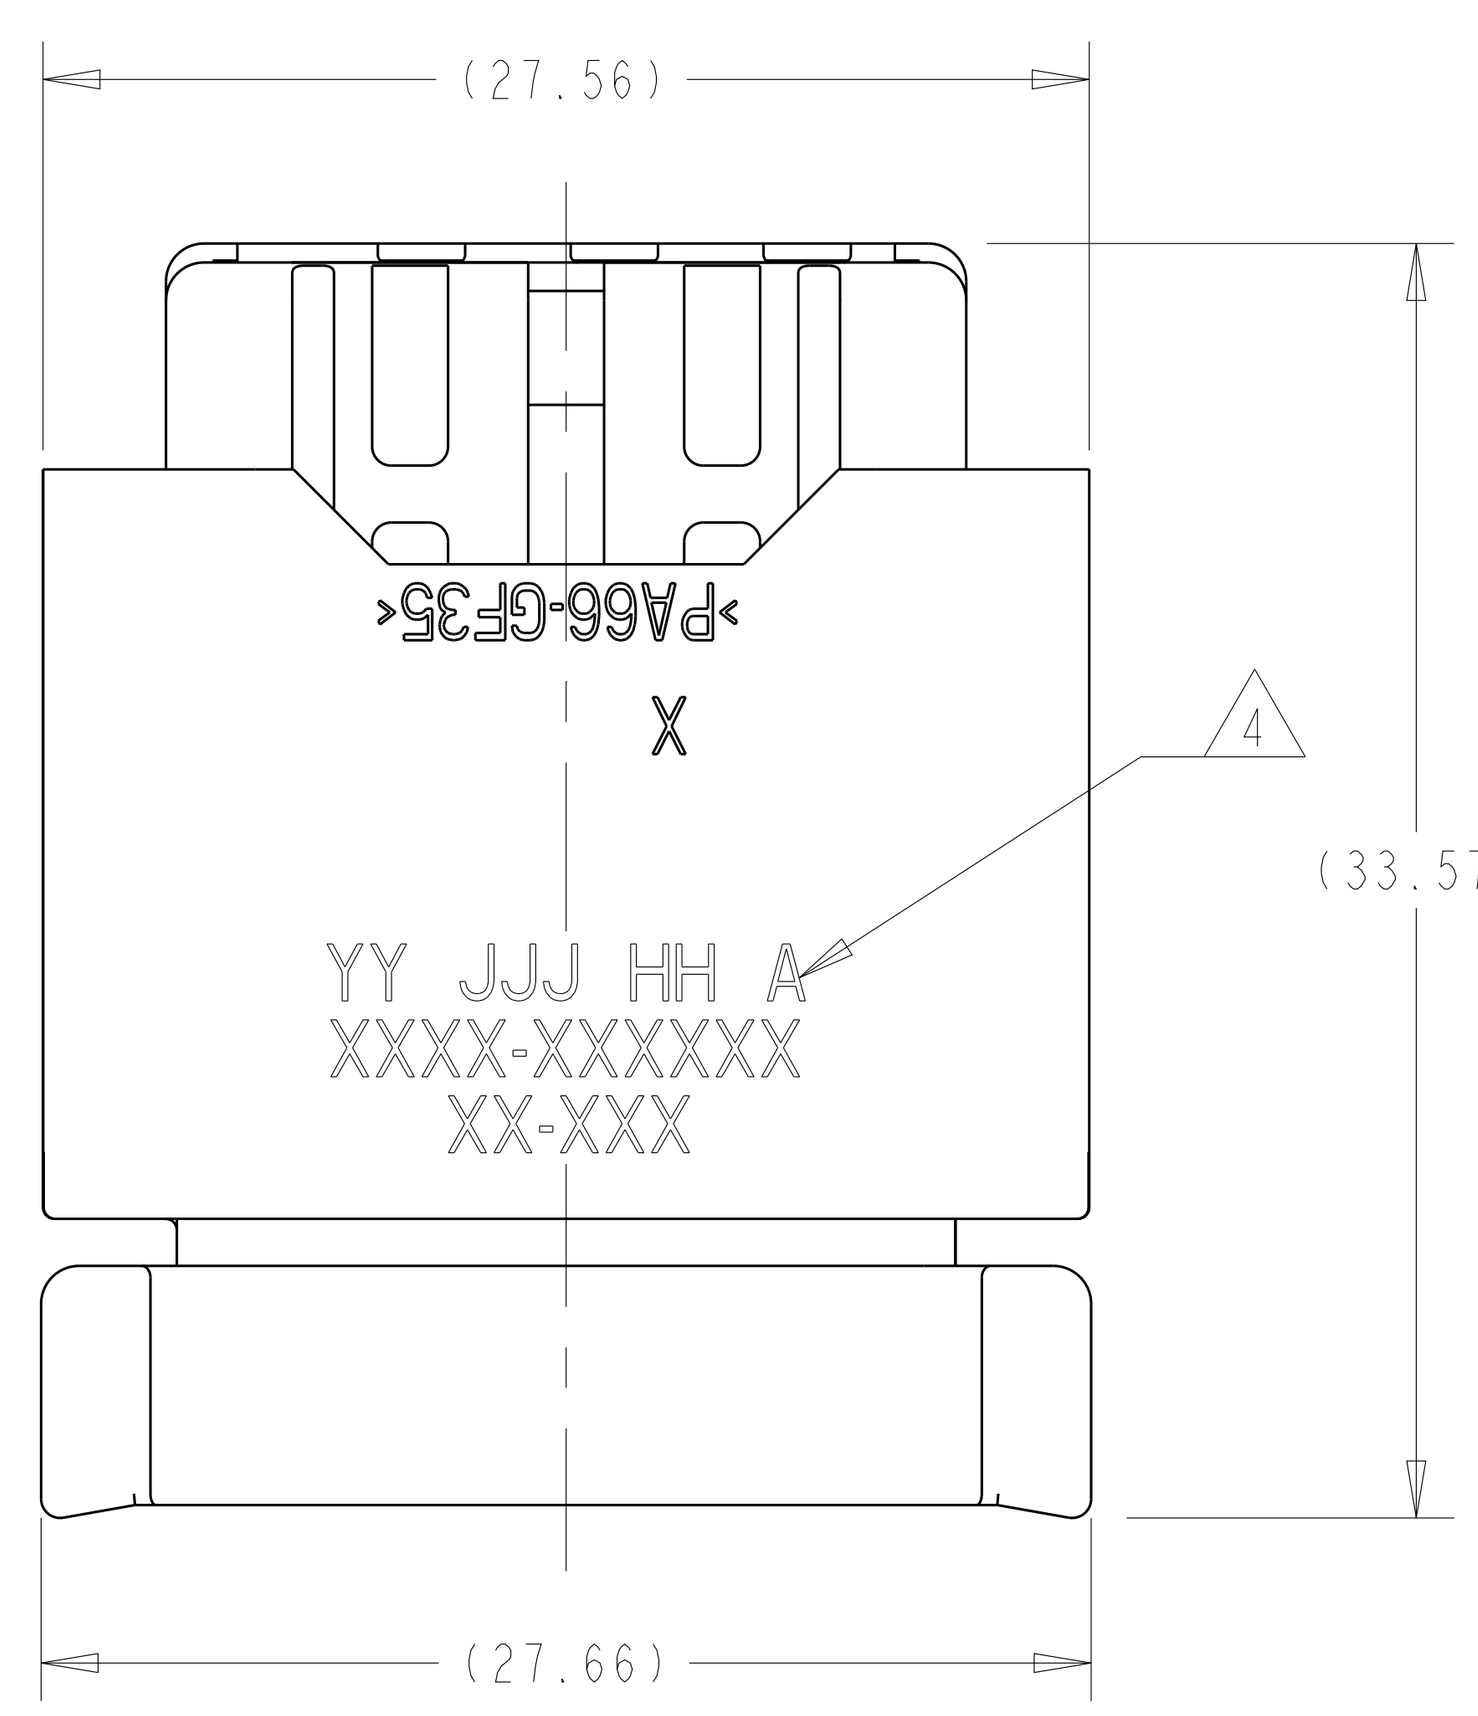

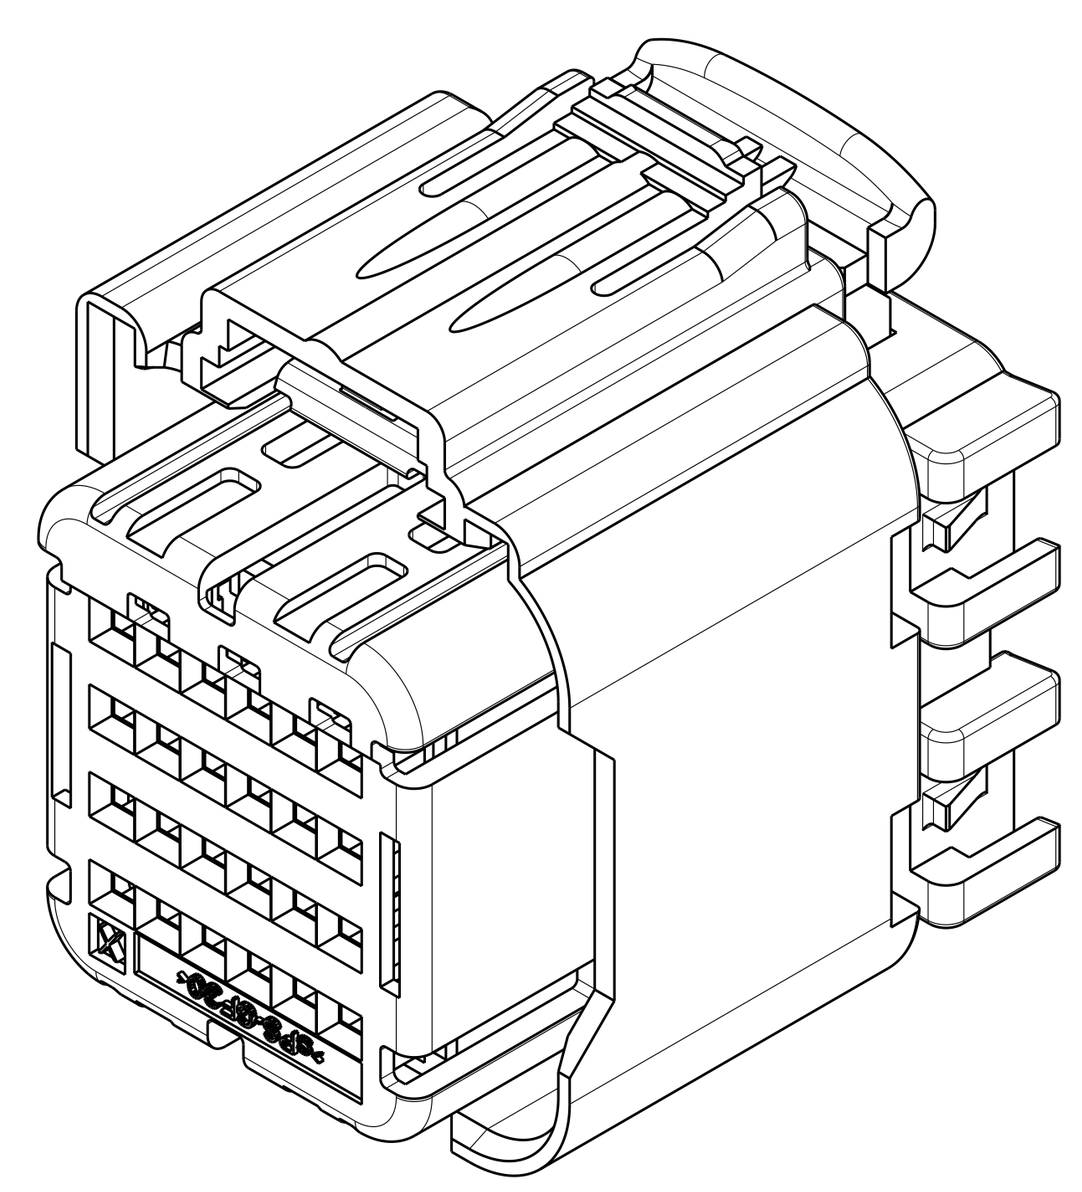
SCALE 2:1

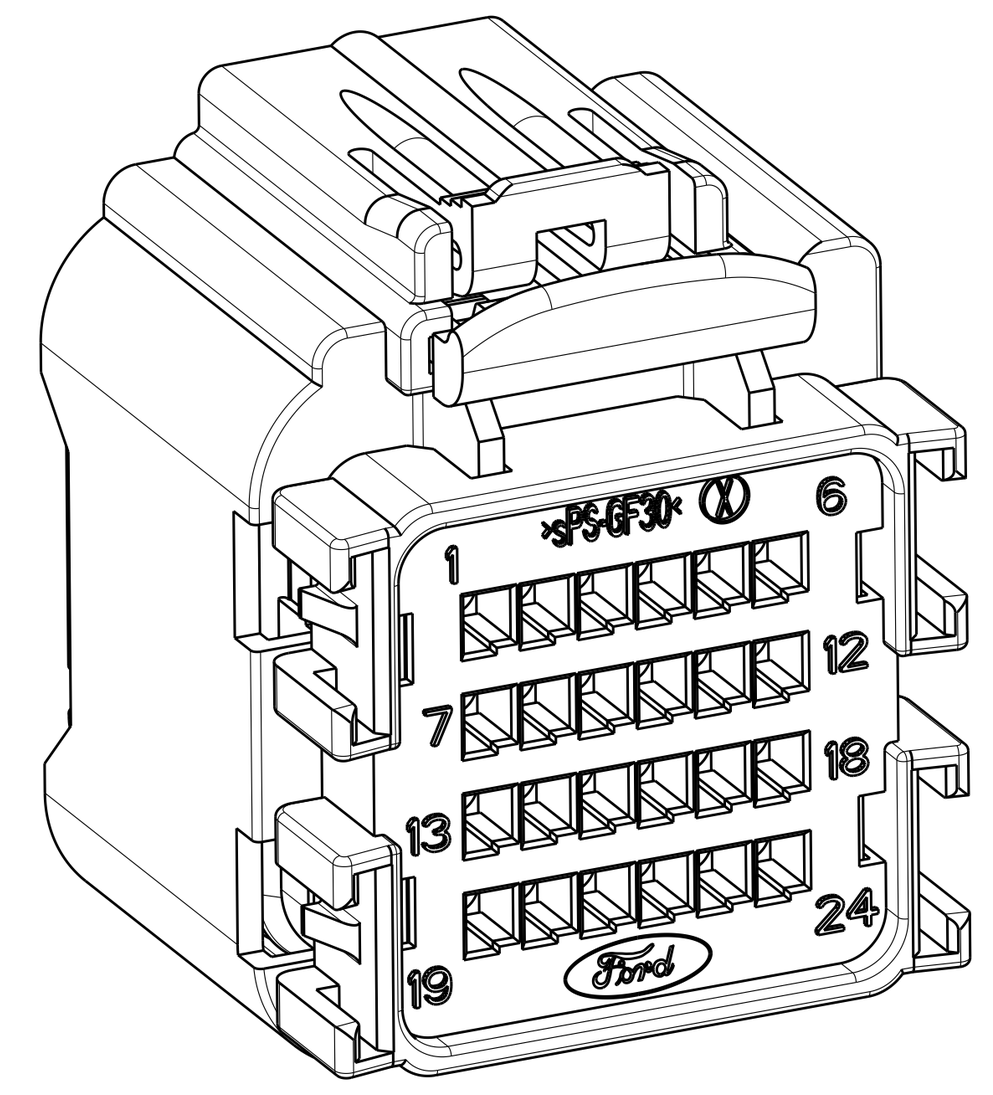

SCALE 2:1


1. APPLICABLE TERMINAL PART NUMBERS (SOLD SEPARATELY):
   FOR TIN APPLICATIONS: 1393367 AND 1393366.
   FOR GOLD APPLICATIONS: 1393365 AND 1393364.
   FOR TERMINATION AND REELING OPTIONS
   SEE DRAWINGS 1393367, 1393366, 1393365, AND 1393364.
2. COMPATIBLE WIRE SIZES FOR MAT SEAL DESIGN 1.19 TO 2.06 O.D. (22-18 AWG, 0.35-0.75 mm2)
3. TPA IS SHIPPED IN IT'S PRE-LOADED POSITION. ALL ASSEMBLIES ARE TO BE TRAY PACKAGED.

△4 CUSTOMER PART NUMBER AND TRACEABILITY CODE (YY = TWO DIGIT YEAR, JJJ = JULIAN DAY, HH = TWO DIGIT MILITARY HOUR, A = ASSEMBLY PROCESS USED) ARE PRINTED IN THIS LOCATION.

5. PART ASSEMBLY WEIGHT WITHOUT TERMINALS AND WITH STANDARD PIN-OUT CONFIGURATION IS 14.39 GRAMS.

△6 OPTIONAL WIRESHIELD P/N 7-1419157-8 (SOLD SEPARATELY). PLEASE CONTACT YOUR TE SALES REPRESENTATIVE FOR AVAILABILITY AND PRICING.

△7 OBSOLETE PART.

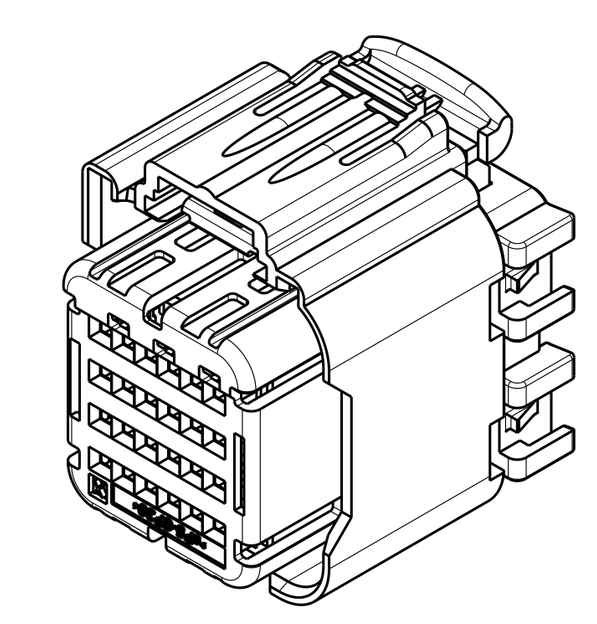
SCALE 1:1

KEYING OPTION "A" SHOWN

ASSEMBLY PART NUMBERS (QUANTITY)

ITEM	1-1438103-7	1-1438103-6 △7	1-1438103-5	1-1438356-2	2-1438095-3	1-1438103-4	1438582-3	1-1438356-1	1-1438096-4	1-1438103-3	1-1438356-0 △7	2-1438095-2	1-1438096-3	1-1438096-2	1-1438096-1
6															
5	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
4	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
3	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
1															
1							1								
1				1				1			1				
1									1				1	1	1
1					1							1			
1	1	1	1			1				1					

ITEM	1438583-3	1438583-2	1438583-1	1438582-2	1438582-1	1-1438103-2 △7	2-1438095-1 △7	2-1438095-0 △7	1-1438095-9	1-1438103-1	1-1438095-8	1-1438095-7 △7	1-1438103-0 △7	2-1438103-0 △7	1438356-9
6															
5	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
4	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
3	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
1	1	1	1												
1				1	1										
1															1
1															
1							1	1	1		1	1			
1						1				1			1	1	

ITEM	1438356-8	1438103-9	1-1438095-6	1-1438095-5	1-1438095-4	1438356-7	1438356-6 △7	1438356-5	1438356-4	1-1438095-3	1-1438095-2	1438103-8	1438356-3	1-1438095-1	1438356-2
6															
5	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
4	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
3	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
1															
1															
1	1					1	1	1	1				1		1
1															
1			1	1	1					1	1			1	
1		1										1			

ITEM	1438356-1	1-1438096-0	1438096-9	1438096-8 △7	1438096-7	1438096-6	1438096-5	1438096-4 △7	1438096-3	1438096-2	4-1419171-1	1-1438095-0	1438095-9	1438095-8	1438095-7
6															
5	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
4	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
3	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
1															
1															
1	1														
1		1	1	1	1	1	1	1	1	1	1				
1												1	1	1	1
1															

ITEM	1438095-6 △7	1438095-5	1438095-4	1438095-3	1438095-2	4-1419171-0	1438103-7	1438103-6 △7	1438103-5	1438103-4	1438103-3 △7	1438103-2	1438103-1	7-1419157-7	3-1419171-9
6															
5	1	1	1	1	1	1	1		1	1	1	1	1	1	1
4	1	1	1	1	1	1	1		1	1	1	1	1	1	1
3	1	1	1	1	1	1	1		1	1	1	1	1	1	1
2	1	1	1	1	1	1	1		1	1	1	1	1	1	1
1															
1															
1															
1															
1	1	1	1	1	1	1									
1							1	1	1	1	1	1	1	1	1

ITEM	DESCRIPTION	MATERIAL	FINISH/COLOR
6	CPA	PBT 15% GF	RED
5	PERIMETER SEAL	SILICONE	GREEN
4	GROMMET	SILICONE	BROWN
3	COVER	PA66 35% GF	BLACK
2	TPA WITH 3 SHORTING BAR POSITIONS CONFIGURATION	sPS 30% GF	RED OR NATURAL
1	PLUG WITH KEYING OPTION "F" AND 3 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
1	PLUG WITH KEYING OPTION "E" AND 3 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
1	PLUG WITH KEYING OPTION "D" AND 3 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
1	PLUG WITH KEYING OPTION "C" AND 3 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	NATURAL
1	PLUG WITH KEYING OPTION "B" AND 3 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
1	PLUG WITH KEYING OPTION "A" AND 3 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	GRAY

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.3
2 PLC ±0.10
3 PLC ±-
4 PLC ±-
ANGLES ±3°

MATERIAL - SEE CHART ABOVE
FINISH - -

DWN M. FORISKA 16APR2002
CHK M. FORISKA 16APR2002
APVD A. VALASEK 16APR2002
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT SEE-NOTE 5

TE Connectivity

NAME: 24 WAY ARM, PLUG ASSEMBLY WITHOUT SHORTING BARS, CUSTOMER SPEC.

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-3-1419157-9	

CUSTOMER DRAWING | SCALE 3:1 | SHEET 1 OF 3 | REV BN2

4805 (3/11)

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
© COPYRIGHT 2018 BY - TE CONNECTIVITY ALL RIGHTS RESERVED.

LOC	DIST
FX	00

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

D

C

B

ASSEMBLY PART NUMBERS

ITEM	2098672-1	2035010-2	2035010-1	2035009-3	2035009-2	2035009-1	2035008-3	2035008-2	2035008-1	2035007-2	2035007-1
6	1	1	1	1	1	1	1	1	1	1	1
5	1	1	1	1	1	1	1	1	1	1	1
4	1	1	1	1	1	1	1	1	1	1	1
3	1	1	1	1	1	1	1	1	1	1	1
2	1	1	1	1	1	1	1	1	1	1	1
1				1	1	1					
1											
1		1	1								
1										1	1
1											
1	1						1	1	1		

ITEM	3-1438103-9	3-1438103-8	3-1438103-7	3-1438103-6	3-1438103-5	3-1438103-4	3-1438103-3	3-1438103-2	3-1438103-1	3-1438103-0	2-1438103-9	2-1438103-8	2-1438103-7	2-1438103-6	2-1438103-5	2-1438103-4	2-1438103-3	2-1438103-2
6																		
5	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
4	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
3	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
1																		
1																		
1																		
1																		
1																		
1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

ITEM	1-1438356-9	1-1438356-8	1-1438356-7	1-1438356-6	1-1438356-5	1-1438356-4	1438582-5	1438582-4	1-1438096-8	1-1438096-5	1-1438356-3	1-1438103-9	1-1438103-8 (7)	DESCRIPTION	MATERIAL	FINISH/COLOR
6														CPA	PBT 15% GF	RED
5	1	1	1	1	1	1	1	1	1	1	1	1	1	PERIMETER SEAL	SILICONE	GREEN
4	1	1	1	1	1	1	1	1	1	1	1	1	1	GROMMET	SILICONE	BROWN
3	1	1	1	1	1	1	1	1	1	1	1	1	1	COVER	PA66 35% GF	BLACK
2	1	1	1	1	1	1	1	1	1	1	1	1	1	TPA WITH 3 SHORTING BAR POSITIONS CONFIGURATION	sPS 30% GF	RED OR NATURAL
1														PLUG WITH KEYING OPTION "F" AND 3 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
1							1	1						PLUG WITH KEYING OPTION "E" AND 3 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
1	1	1	1	1	1	1					1			PLUG WITH KEYING OPTION "D" AND 3 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
1									1	1				PLUG WITH KEYING OPTION "C" AND 3 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	NATURAL
1														PLUG WITH KEYING OPTION "B" AND 3 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
1												1	1	PLUG WITH KEYING OPTION "A" AND 3 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	GRAY

QUANTITY

A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	M. FORISKA	16APR2002
CHK	M. FORISKA	16APR2002
APVD	A. VALASEK	16APR2002

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.3
2 PLC ±0.10
3 PLC ±-
4 PLC ±-
ANGLES ±3°

MATERIAL - SEE CHART ABOVE
FINISH - -

PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

TE Connectivity

NAME
24 WAY ARM,
PLUG ASSEMBLY WITHOUT SHORTING BARS,
CUSTOMER SPEC.

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-3-1419157-9	

CUSTOMER DRAWING | SCALE 3:1 | SHEET 2 OF 3 | REV BN2

4805 (3/11)

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
© COPYRIGHT 2018 BY - TE CONNECTIVITY ALL RIGHTS RESERVED.

LOC	DIST
FX	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

PIN-OUT CHART

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	TERMINAL HOLE POSITION	ASSEMBLY PART NUMBER	PLUG KEYING OPTION
			4	5	6			9			12		14	15	16	17	18		20	21	22				3-1438103-9	KEY "A"
		3			6						12													3-1438103-8	KEY "A"
			4	5	6			9					14	15	16	17	18		20	21	22				3-1438103-7	KEY "A"
				5	6					11	12											23		3-1438103-6	KEY "A"
1	2			5	6	7	8			11	12			15	16	17	18			21	22			3-1438103-5	KEY "A"
	2			5	6					11	12	13	14	15			18	19		21	22	23	24	1438582-5	KEY "E"
						7	8										18			21	22			1-1438356-9	KEY "D"
																	18			21	22			1-1438356-8	KEY "D"
	2	3	4																			23		3-1438103-4	KEY "A"
	2	3	4																			23		2035008-3	KEY "A"
						7	8						14							21	22			2098672-1	KEY "A"
				5	6	7	8										18			21	22			1-1438356-7	KEY "D"
1	2			5	6	7	8			11	12			15	16						22			1-1438356-6	KEY "D"
1	2			5	6	7	8			11	12			15	16						22			3-1438103-3	KEY "A"
	2			5	6					11	12	13	14	15			18	19		21	22	23	24	1-1438096-8	KEY "C"
1	2			5	6	7	8			11	12			15						21	22			3-1438103-2	KEY "A"
				5	6																	23		3-1438103-1	KEY "A"
	2			5	6	7	8			11	12	13	14	15			18	19		21	22	23	24	3-1438103-0	KEY "A"
1	2			5	6	7	8	9	10	11	12	13	14	15	16	17	18			21	22	23		2-1438103-9	KEY "A"
1	2	3				7	8	9	10	11		13	14	15	16	17	18	19	20	21	22	23	24	2035010-2	KEY "D"
																								2035010-1	KEY "D"
1						7			10	11		13			16	17	18	19			22	23	24	2035009-3	KEY "F"
1						7			10	11		13			16			19			22			2035009-2	KEY "F"
																								2035009-1	KEY "F"
	2			5	6					11	12	13			16		18						24	2035008-2	KEY "A"
																								2035008-1	KEY "A"
	2			5	6					11	12	13		15	16		18	19			22	23	24	2035007-2	KEY "C"
																								2035007-1	KEY "C"
1	2			5	6	7	8			11	12			15		17	18			21	22	23		2-1438103-8	KEY "A"
	2			5	6					11	12	13		15			18	19			22	23	24	2-1438103-7	KEY "A"
										11	12						18			21	22			2-1438103-6	KEY "A"
										11	12										22			2-1438103-5	KEY "A"
1	2			5	6	7	8			11	12		14	15	16						22	23		1-1438356-5	KEY "D"
1	2			5	6	7	8			11	12		14	15	16						22	23		2-1438103-4	KEY "A"
	2	3	4	5	6						12	13	14	15	16		18	19		21	22	23	24	1438582-4	KEY "E"
				5	6					11	12			15			18			21	22	23		2-1438103-3	KEY "A"
1	2			5	6	7	8			11	12	13	14	15	16	17	18			21	22	23		2-1438103-2	KEY "A"
1	2			5	6	7	8	9	10	11	12			15	16	17	18			21	22	23		1-1438356-4	KEY "D"
1	2			5	6					11	12			15	16						22			1-1438096-5	KEY "C"
1	2			5	6					11	12			15	16						22			1-1438356-3	KEY "D"
																					22			1-1438103-9	KEY "A"
																	18			21	22			1-1438103-8	KEY "A"
1	2			5	6	7	8			11	12	13	14	15	16						22	23		1-1438103-7	KEY "A"
	2			5	6					11	12	13			16		18						24	1-1438103-6	KEY "A"
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24			

CAVITIES WITH A NUMERIC SYMBOL INDICATE CLOSED TERMINAL HOLE POSITIONS

BLANK CAVITIES INDICATE OPEN TERMINAL HOLE POSITIONS

PIN-OUT CHART

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	TERMINAL HOLE POSITION	ASSEMBLY PART NUMBER	PLUG KEYING OPTION
1	2	3	4	5		7	8	9	10	11		13	14	15	16	17	18	19	20	21	22	23	24	1-1438103-5	KEY "A"
1	2			5	6	7	8			11	12			15	16	17	18			21	22	23		1-1438356-2	KEY "D"
	2	3	4	5	6						12	13	14	15	16		18	19		21	22	23	24	2-1438095-3	KEY "B"
			4	5	6				10	11	12				16	17	18				22	23	24	1-1438103-4	KEY "A"
1						7			10	11		13			16	17	18	19			22	23	24	1438582-3	KEY "E"
1	2	3				7	8	9	10	11		13	14	15	16	17	18	19	20	21	22	23	24	1-1438356-1	KEY "D"
	2			5	6					11	12	13		15			18	19			22	23	24	1-1438096-4	KEY "C"
	2			5	6					11	12	13	14	15			18	19		21	22	23	24	1-1438103-3	KEY "A"
1	2	3				7			10	11		13			16	17	18	19	20	21	22	23	24	1-1438356-0	KEY "D"
	2	3	4	5	6	7	8				12	13	14	15	16		18	19		21	22	23	24	2-1438095-2	KEY "B"
	2	3	4	5	6						12	13	14	15	16		18	19		21	22	23	24	1-1438096-3	KEY "C"
	2			5	6					11	12	13			16		18						24	1-1438096-2	KEY "C"
	2			5	6					11	12	13		15	16		18	19			22	23	24	1-1438096-1	KEY "C"
1						7			10	11		13			16	17	18	19			22	23	24	1438583-3	KEY "F"
1						7			10	11		13			16			19			22			1438583-2	KEY "F"
																								1438583-1	KEY "F"
1	2	3				7	8	9	10	11		13	14	15	16	17	18	19	20	21	22	23	24	1438582-2	KEY "E"
																								1438582-1	KEY "E"
1	2	3	4	5		7	8	9	10	11		13	14	15		17		19	20	21				1-1438103-2	KEY "A"
	2	3	4	5	6						12	13	14	15	16		18	19			22	23	24	2-1438095-1	KEY "B"
	2	3	4	5	6					11	12		14		16		18						24	2-1438095-0	KEY "B"
	2	3	4	5	6						12	13		15	16		18	19			22	23	24	1-1438095-9	KEY "B"
1						7			10	11		13			16	17	18	19			22	23	24	1-1438103-1	KEY "A"
	2	3	4	5	6					11	12		14		16		18			21			24	1-1438095-8	KEY "B"
					6						12	13	14	15	16		18	19		21	22	23	24	1-1438095-7	KEY "B"
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	1-1438103-0	KEY "A"
1	2	3				7	8	9				13	14	15		17		19	20	21				2-1438103-0	KEY "A"
																								1438356-9	KEY "D"
1	2			5	6	7	8			11	12			15	16						22	23		1438356-8	KEY "D"
1	2			5	6	7	8			11	12			15	16						22	23		1438103-9	KEY "A"
					6					11	12		14		16		18						24	1-1438095-6	KEY "B"
					6					11	12													1438095-5	KEY "B"
					6					11	12													1438095-4	KEY "B"
					6					11	12													1438095-3	KEY "B"
					6					11	12													1438095-2	KEY "B"
					6					11	12													1438095-1	KEY "B"
					6										16		18					23		1-1438096-0	KEY "C"
					6	7	8	9	10															1438096-9	KEY "C"
					6																			1438096-8	KEY "C"
					6										16		18					23		1438096-7	KEY "C"
					6																			1438096-6	KEY "C"
					6																			1438096-5	KEY "C"
					6																			1438096-4	KEY "C"
					6																			1438096-3	KEY "C"
					6																			1438096-2	KEY "C"
					6																			1438096-1	KEY "C"
					6																			1438096-0	KEY "C"
					6																			1438095-9	KEY "B"
					6																			1438095-8	KEY "B"
					6																			1438095-7	KEY "B"
					6																			1438095-6	KEY "B"
					6																			1438095-5	KEY "B"
					6																			1438095-4	KEY "B"
					6																			1438095-3	KEY "B"
					6																			1438095-2	KEY "B"
					6																			1438356-2	KEY "D"
					6																			1438103-7	KEY "A"
					6																			1438103-6	KEY "A"
					6																			1438103-5	KEY "A"
					6																			1438103-4	KEY "A"
					6																			1438096-5	KEY "C"
					6																			1438103-3	KEY "A"
					6																			1438103-2	KEY "A"
					6																			7-1419157-7	KEY "A"
					6																			1438096-6	KEY "C"
					6																			1438103-1	KEY "A"
					6																			1438356-1	KEY "D"
					6																			4-1419171-1	KEY "C"
					6																			4-1419171-0	KEY "B"
					6																			3-1419171-9	KEY "A"
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24			

CAVITIES WITH A NUMERIC SYMBOL INDICATE CLOSED TERMINAL HOLE POSITIONS

BLANK CAVITIES INDICATE OPEN TERMINAL HOLE POSITIONS

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.3
2 PLC ±0.10
3 PLC ±-
4 PLC ±-
ANGLES ±3°

MATERIAL - SEE CHART ABOVE

FINISH - -

DWN	M. FORISKA	16APR2002
CHK	M. FORISKA	16APR2002
APVD	A. VALASEK	16APR2002
PRODUCT SPEC	-	
APPLICATION SPEC	-	
WEIGHT	-	

TE Connectivity

NAME: 24 WAY ARM, PLUG ASSEMBLY WITHOUT SHORTING BARS, CUSTOMER SPEC.

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-3-1419157-9	

CUSTOMER DRAWING | SCALE 3:1 | SHEET 3 OF 3 | REV BN2

4805 (3/11)

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

936348-1 SBCHE154R7K 1-794222-0 CPF0402B37K4E1 SMW73R0JT 1743455-2 ROX05SJ18R
141991-2 3631B101LL CRGCQ2010J3K3 1903112-2 1969656-1 3430B2F51RTDF 175977-2 2005330-1
2380312-2 3-1393225-0 917696-1 U5254-000005-030PA 2310537-1 2834055-1 MPT100C18RF
RH73H2A40MKTN TE50BR39J 1393431-1 2-292161-3 650075-000 SBCHE64R7K 1-962915-1 2377783-2