

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
AD	39

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	R	REVISED PER ECO-14-000068	26APR2014	NK	MM

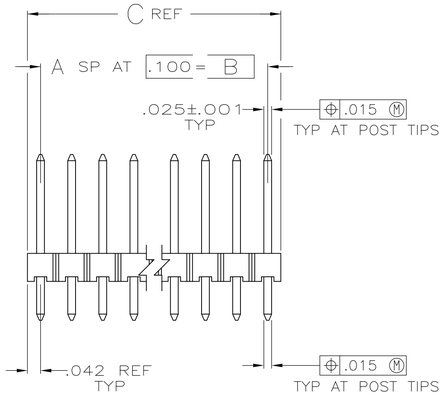

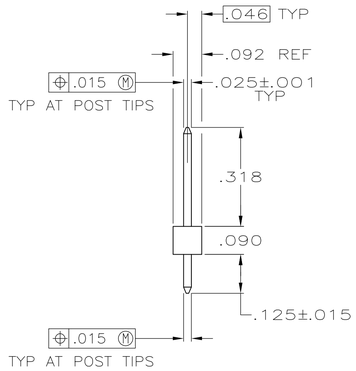

1 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD

2 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS

△3 PACKAGE IN SINGLE TUBES


△4 .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL.

△5 .000100-.000200 BRIGHT TIN OVER .000050 NICKEL.

△6 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.

△7 HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK.

△8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI



RECOMMENDED HOLE LAYOUT

PLATING	REMARKS	C	B	A	NO OF POSN	PART NUMBER
		.484	.400	4	5	5-103321-3
△6		1.384	1.300	13	14	5-103321-2
△6		1.184	1.100	11	12	5-103321-1
△6		1.084	1.000	10	11	5-103321-0
△6		.884	.800	8	9	4-103321-9
		3.984	3.900	39	40	4-103321-8
		1.584	1.500	15	16	4-103321-7
		.784	.700	7	8	4-103321-6
		.284	.200	2	3	4-103321-5
		.184	.100	1	2	4-103321-4
△6		.084	—	—	1	4-103321-3
SUPERSEDED BY 1-103321-4	△3	1.384	1.300	13	14	4-103321-2
SUPERSEDED BY 103321-3	△3	.284	.200	2	3	4-103321-1
		3.984	3.900	39	40	4-103321-0
△8 OBSOLETE		3.884	3.800	38	39	3-103321-9
△8 OBSOLETE		3.784	3.700	37	38	3-103321-8
△8 OBSOLETE		3.684	3.600	36	37	3-103321-7
		3.584	3.500	35	36	3-103321-6
△8 OBSOLETE		3.484	3.400	34	35	3-103321-5
△8 OBSOLETE		3.384	3.300	33	34	3-103321-4
△8 OBSOLETE		3.284	3.200	32	33	3-103321-3
△8 OBSOLETE		3.184	3.100	31	32	3-103321-2
△8 OBSOLETE		3.084	3.000	30	31	3-103321-1
△8 OBSOLETE		2.984	2.900	29	30	3-103321-0
△8 OBSOLETE		2.884	2.800	28	29	2-103321-9
△8 OBSOLETE		2.784	2.700	27	28	2-103321-8
△8 OBSOLETE		2.684	2.600	26	27	2-103321-7
△8 OBSOLETE		2.584	2.500	25	26	2-103321-6
		2.484	2.400	24	25	2-103321-5
△8 OBSOLETE		2.384	2.300	23	24	2-103321-4
△8 OBSOLETE		2.284	2.200	22	23	2-103321-3
△8 OBSOLETE		2.184	2.100	21	22	2-103321-2
△8 OBSOLETE		2.084	2.000	20	21	2-103321-1
△8 SUPERSEDED BY 7-146274-0		1.984	1.900	19	20	2-103321-0
△8 OBSOLETE		1.884	1.800	18	19	1-103321-9
△8 OBSOLETE		1.784	1.700	17	18	1-103321-8
△8 OBSOLETE		1.684	1.600	16	17	1-103321-7
		1.584	1.500	15	16	1-103321-6
△8 OBSOLETE		1.484	1.400	14	15	1-103321-5
		1.384	1.300	13	14	1-103321-4
△8 OBSOLETE		1.284	1.200	12	13	1-103321-3
△8 OBSOLETE		1.184	1.100	11	12	1-103321-2
△8 OBSOLETE		1.084	1.000	10	11	1-103321-1
		.984	.900	9	10	1-103321-0
		.884	.800	8	9	103321-9
		.784	.700	7	8	103321-8
		.684	.600	6	7	103321-7
		.584	.500	5	6	103321-6
		.484	.400	4	5	103321-5
		.384	.300	3	4	103321-4
		.284	.200	2	3	103321-3
		.184	.100	1	2	103321-2
		.084	——	——	1	103321-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .005
4 PLC ± -
ANGLES ± -

MATERIAL: POST: COPPER ALLOY △7

FINISH: SEE TABLE

DWN J.MARTINELLI 15OCT92
CHK JOHN KNITTLE 23NOV92
APVD B. FLINCHBAUGH 23NOV92

TE Connectivity

NAME: ASSEMBLY, HEADER, BREAKAWAY, MOD II, SINGLE ROW, .100 C/L, VERTICAL, WITH .025 SQUARE POSTS

PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-103321	—

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV R

4805 (3/11)

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

SBCHE64R7K 2377783-2 2380312-2 3631B101LL CPF0402B37K4E1 SMW73R0JT 1393431-1 2310537-1 TE50BR39J 3430B2F51RTDF 650075-000 RH73H2A40MKTN SBCHE154R7K 175977-2 ROX05SJ18R 2-292161-3 2005330-1 1-794222-0 1903112-2 2834055-1 3-1393225-0 1-962915-1 1743455-2 1969656-1 917696-1 CRGCQ2010J3K3 U5254-000005-030PA 141991-2 936348-1 MPT100C18RF