

Apr.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


HRS DRAWING FOR REFERENCE

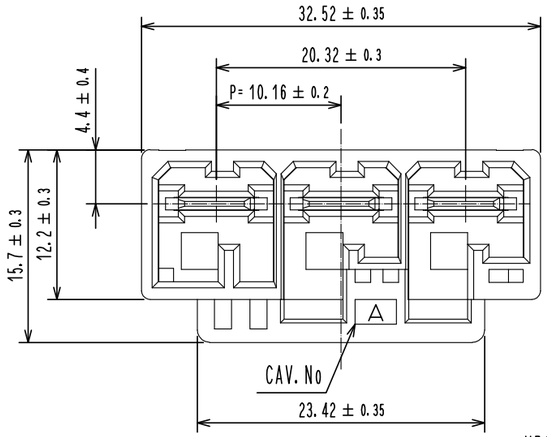



Recommended PCB Layout
(Board thickens : t=1.6±0.1mm)

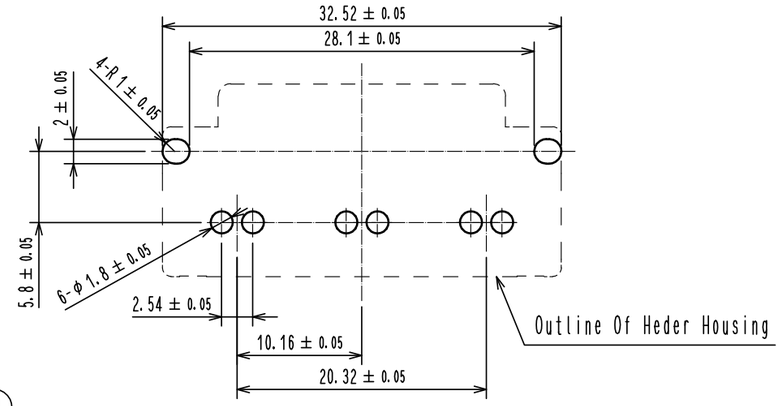


Aprication Diagram(1:1)

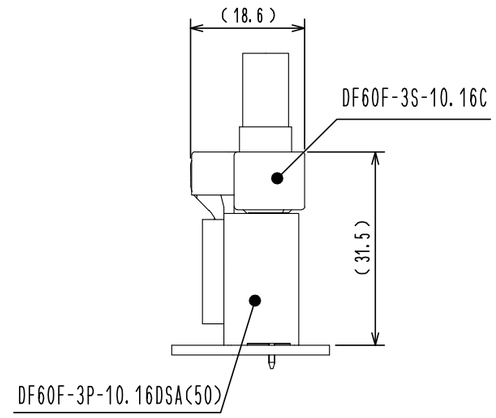


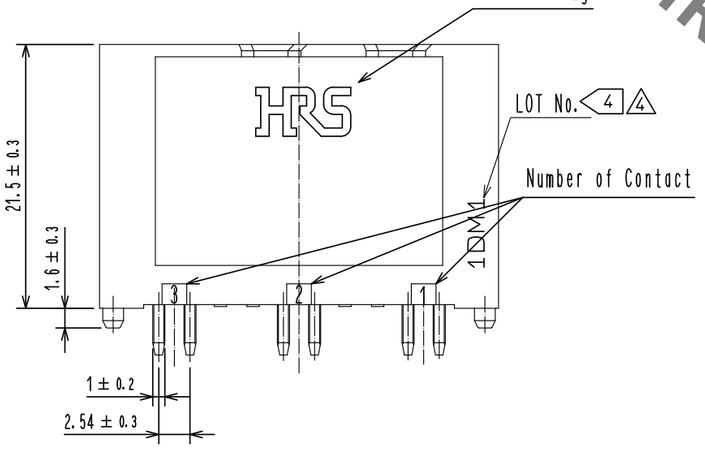

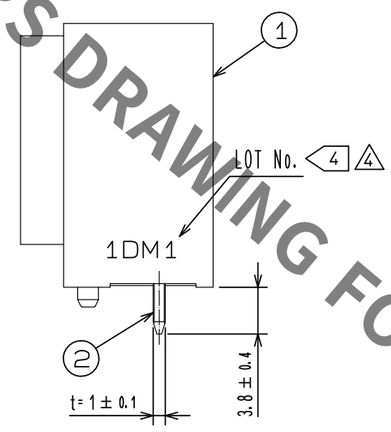


Packaging Diagram (FRRE)

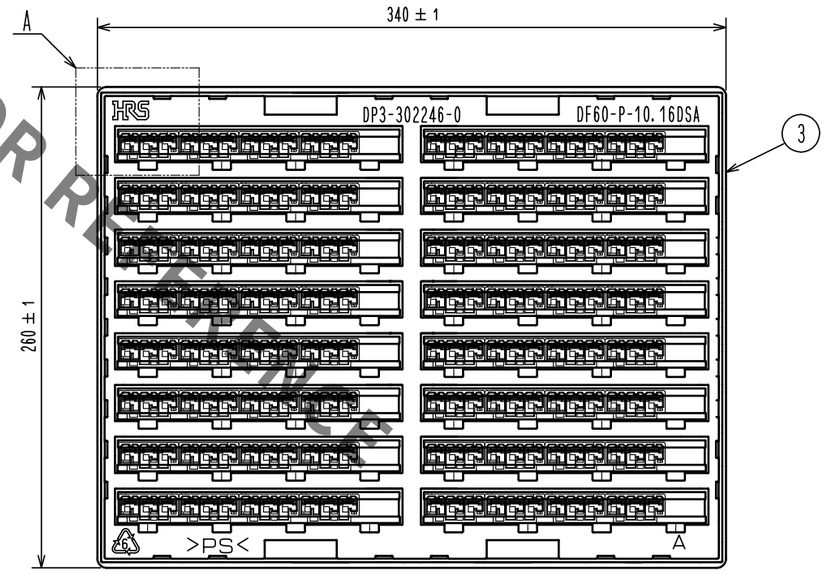

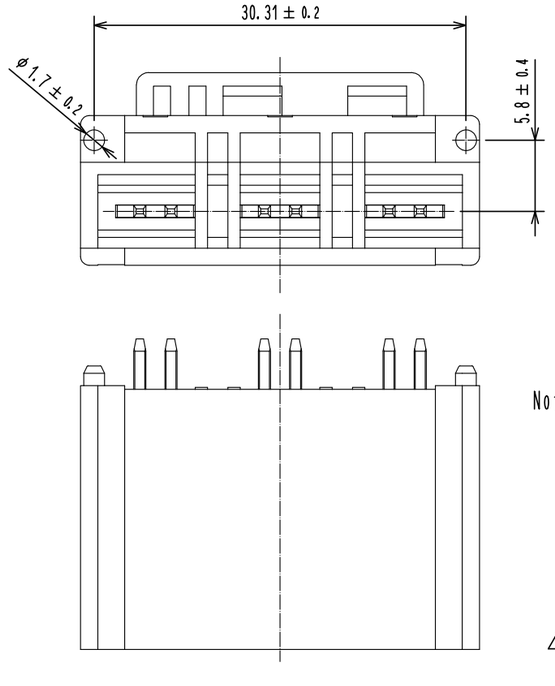

A(FREE)



Notes 1. Per tray : 64 Pieces.
2. Refer to the technical specification (ETAP-H0816-00) for the packing type.
3. UL(File No. E52653)
C-UL(File No. E52653)
TUV (Certificate No. R50400864) authorization article.

4 Lot No. is displayed in one of the two locations.

NO.	MATERIAL	FINISH , REMARKS
1	PBT	Black. UL94-V0
2	Copper Alloy	Contact Area : Au Plating 0.2μm min LEAD Area : Tin Plating 1μm min Under Plating : Ni Plating 1μm min
3	PS	White

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	4	3	DIS-H-00012301	TS. MIYAKI	SZ. ONO	20220217

HIROSE ELECTRIC CO., LTD.

APPROVED	HS. OKAWA	20171011
CHECED	ST. WADA	20171011
DESIGNED	TT. OHSAKO	20171011
DRAWN	TT. OHSAKO	20171011

DRAWING NO.	EDC-379270-50-00
PART NO.	DF60F-3P-10.16DSA(50)
CODE NO.	CL0680-4001-0-50

4 1/1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Hirose Electric:

FH41-50S-0.5SH(28) GT8E-6S-HU DF11-16DP-2DSA(24) DF36A-25P-SHL ZE05H-4P-2V(A) BM29B0.6-4DS/2-0.35V(51) DF62C-4S-2.2C FH35C-19S-0.3SHW(50) HDE-CTH(10) RM15TP-2PA(81) ZE05H-12DP-2H DF22A-1416SCFA DF33C-4S-3.3C FX8-120S-SV(22) ZE05-24DP-2H ZE064W-8DP-HU/R(A) DF19A-3032SCFA(41) DF65-4P-1.7V(21) FH41-30S-0.5SH(05) FX18-80S-0.8SH RM12BRD-2PH(81) DF40C-50DP-0.4V(51) DF57AH-5S-1.2C FH72-21S-0.3SHW DF17(3.0)-40DS-0.5V(57) DF59M-2224PCF FX18-60S-0.8SH RM15TRH-10PH(81) ZH05-20DP-HU(B) DF52-4P-0.8C