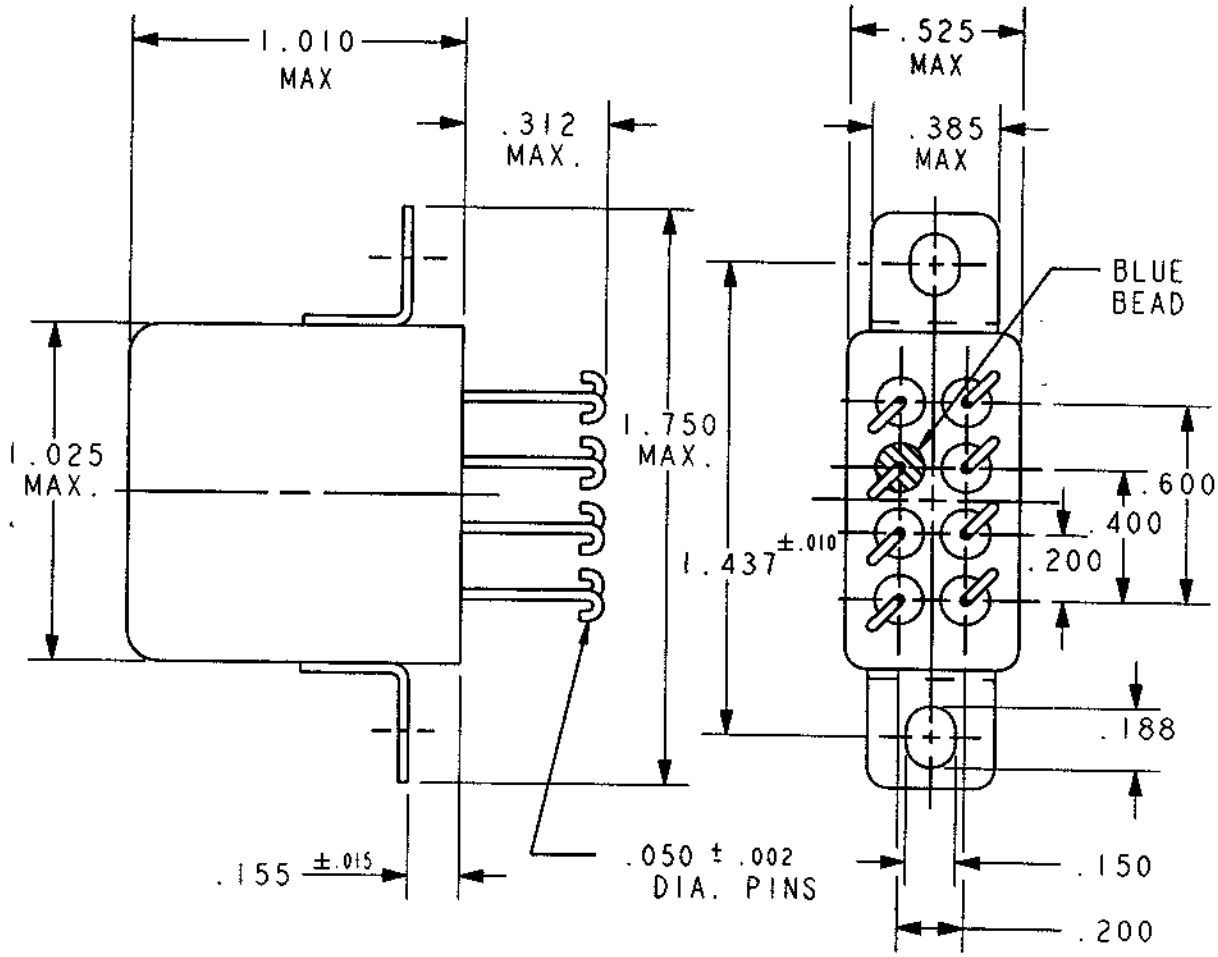


REV. 4
DCO 102710

COIL: @ 25°C

RESISTANCE	75 OHMS ±10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	6.5 VDC
MUST RELEASE	.9 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 50 g's 11 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 15 MS MAX.
OPERATE BOUNCE 5 MS MAX.
RELEASE BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

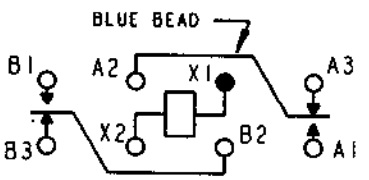

TERMINAL VIEW

CONTACT RATING: 10 AMPS 28 VDC
5 AMPS 115 VAC/400 Hz RESISTIVE
50,000 OPERATIONS

DR. BSH 8/17/01 | CK. TLG 8-20-01

CII Technologies
advanced control electronic solutions

CUST. OPL
CUST. NO. M5757423-006 REV.

"07" RELAY

B07D692BB2-0069

F-718 REV. 3

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

175977-2 2377783-2 CPF0402B37K4E1 1-794222-0 2380312-2 SBCHE154R7K 2310537-1
3430B2F51RTDF 3631B101LL 650075-000 RH73H2A40MKTN TE50BR39J 2834055-1 3-1393225-0
917696-1 SBCHE64R7K 1-962915-1 1393431-1 141991-2 1969656-1 2-292161-3 936348-1 1903112-2
MPT100C18RF CRGCQ2010J3K3 SMW73R0JT 1743455-2 2005330-1 ROX05SJ18R
U5254-000005-030PA