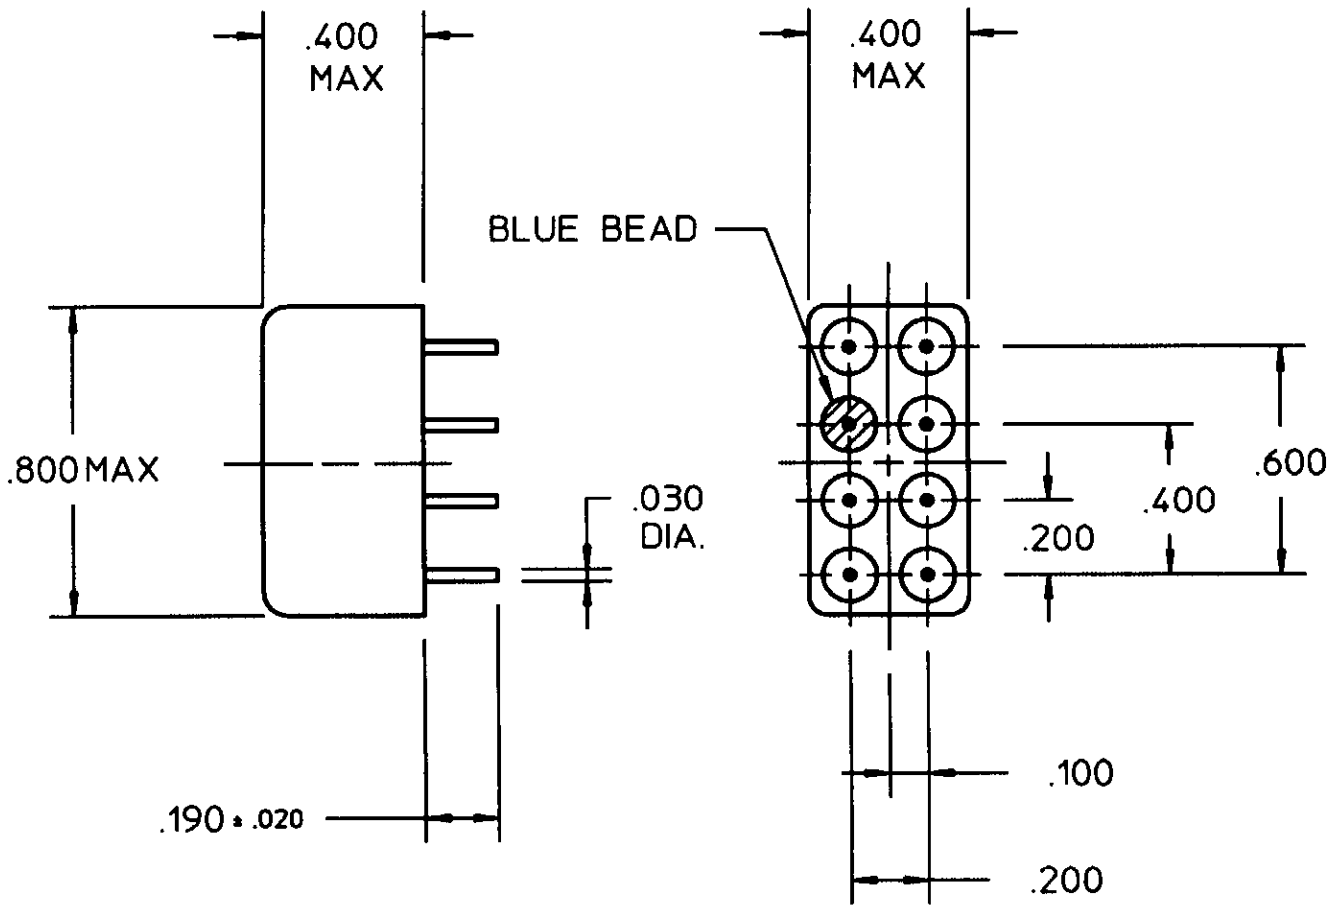


COIL: @ +25 °C

RESISTANCE 440 OHMS ± 10%

NOMINAL VOLTAGE 15.0-23 VDC

MUST OPERATE 9.9 VDC

MUST RELEASE 6.0 VDC MAX 1.1 VDC MIN

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 11 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX
CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

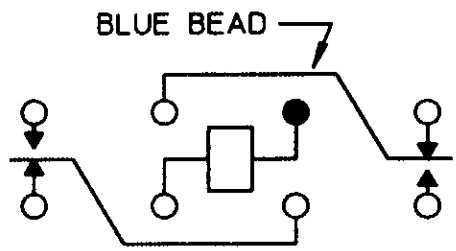

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 5/22/92 CK. 5/26/92

COMMUNICATIONS INSTRUMENTS, INC.

CUST. GENICOM
CUST. NO. 3SAV5004F1

TYPE "HFW" RELAY

HFW1201S171

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

3430B2F51RTDF SMW73R0JT 175977-2 2005330-1 2310537-1 650075-000 917696-1 MPT100C18RF 1-794222-0 1969656-1 2-292161-3 ROX05SJ18R TE50BR39J U5254-000005-030PA 3631B101LL CPF0402B37K4E1 1903112-2 2380312-2 SBCHE64R7K 1393431-1 141991-2 1743455-2 3-1393225-0 936348-1 RH73H2A40MKTN 1-962915-1 2377783-2 CRGCQ2010J3K3 SBCHE154R7K 2834055-1