
REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.12.14	阿树

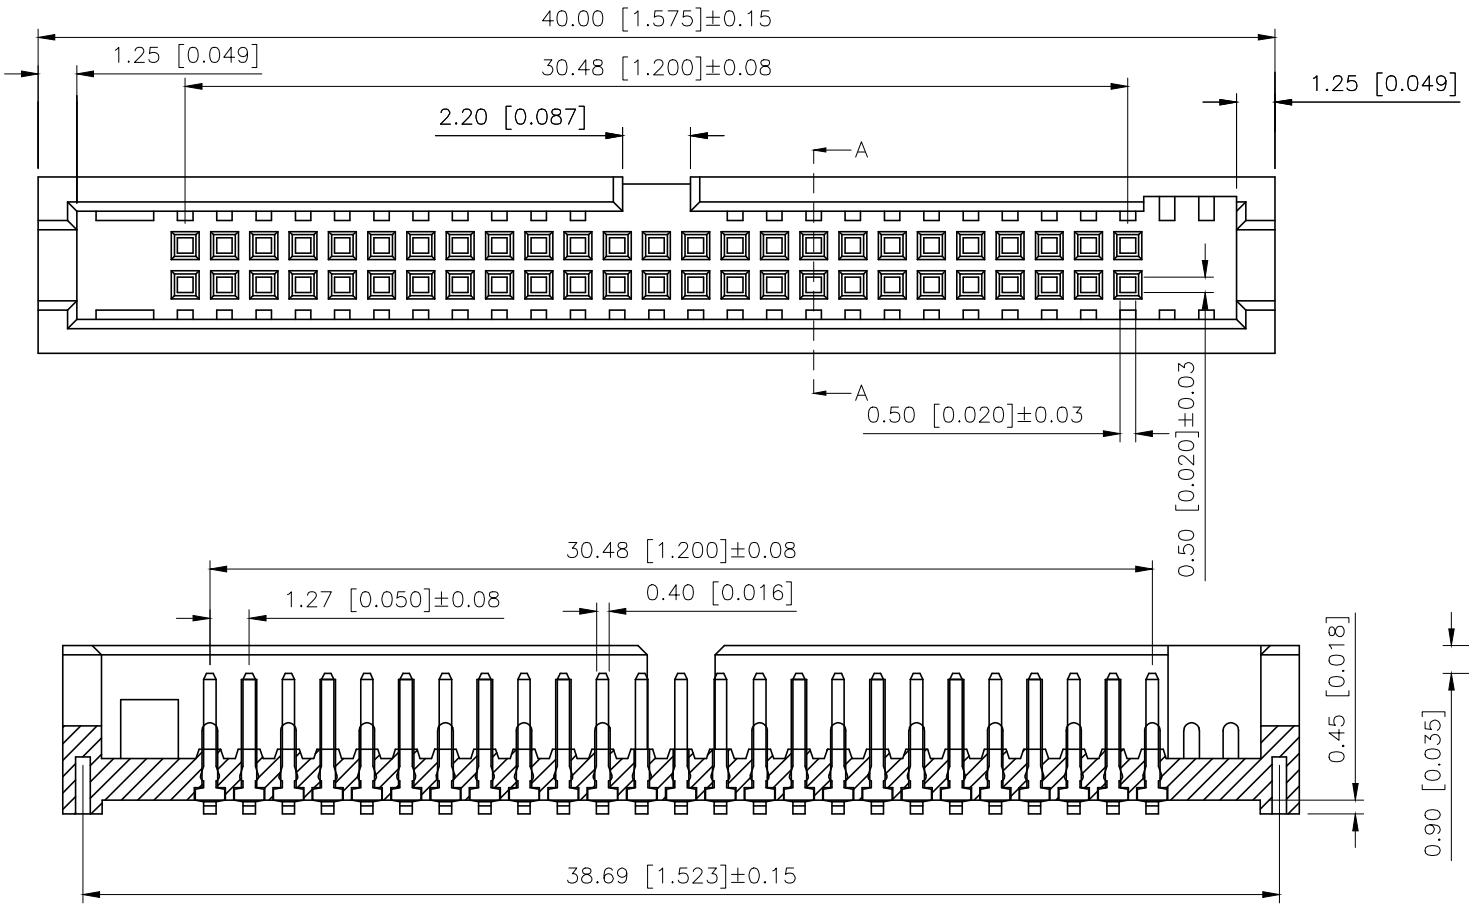

Voltage rating:250V AC/DC
额定电压:250V AC/DC
Current rating:1.0A
额定电流：1.0A
Insulation resistance:1000MΩ Min
绝缘电阻：1000MΩ Min
Withstanding voltage:≥500V AC/minute
耐压：≥500VC/分钟
Temperature range:−40℃−+250℃
使用温度：−40℃−+250℃

PART NO.:

X1270 W V S−2x25 B1−9T AUSN
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

①Series No
②Category:W−Wafer
③Welding Board Angle:V−Stright 180°
④Welding Way:S−SMT
⑤Row No−Pin No:2x25P
⑥B1:Type B Contains gaps
⑦Material:PA9T−Nylon PA9T UL94V−0
⑧Planting Category:AUSN−Plating AUSN
V01−All Gold Flash

PART NO	Material	Material(Pin And Solder Tabs)	Finish(Pin And Solder Tabs)	Suitible XKB Housing
X1270WVS−2x25B1−9TV01	Nylon−9T UL 94V−0	Brass	Gold Flash	X1270H2−2xXX
X1270WVS−2x25B1−9TAUSN			Plating AuSn	

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuCES	

XKB 星妙 Connection

DESIGN	阿树	VIEW:	MODEL TYPE: 1.27mm BTB Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X1270WVS−2x25B1−9TAUSN
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1