



RoHS


MAPX	MODIFICATION	DRW	DATE







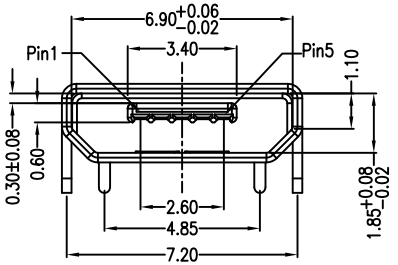







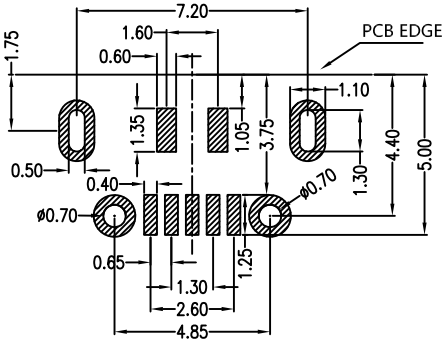

PCB图仅做参考

Note:
1.Material:
③ 1.1 Housing: High temperature thermoplastic with g.f,UL94v-0
④ 1.2 Contact: copper alloy,t=0.15mm
① 1.3 Shell: copper alloy,t=0.30mm
② 1.4 Shell: stainless steel,t=0.12mm
2.Specification:
2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.
2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
2.3 Contact resistance: 30 mΩ Max.
2.4 Insulation resistance: 100 MΩ Min.
2.5 Total mating force: 3.57 Kgf Max.
2.6 Total unmating force: 1.0 Kgf Min.
2.7 Temperature range: -30°C~80°C

产品图
PRODUCT CHART DWG

公差一览表
TOLERANCE UNLESS OTHERMSE

X.	±0.30	X.	±5.°
.X	±0.25	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司
Shenzhen Jing Tuo Jin Electronics Co., Ltd.

单位 UNITS	MM	制图 DRAWING	尹先华	制图料号 PRODUCT PART NO.	920-E62A2021S10102
比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	MICRO 5P-F B型7.2 4.85四牛角型无卷边无柱 SMT短针黑胶带钢片
日期 DATE	2021-04-16	核准 APPD	黄国荣	角法 VIEW	版本 VER A0

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

917-P81A202ES60201 918-418K2022Y40011 920-154A2021Y10110 920-A64A2091S101A3
912-112A1011D10100 906-262A1021D10200 906-752B1114D10200 907-111A1022D10200
920-C52A2021S10105 904-331B2032S10200 910-151A2021D10100 918-318K2023C40005
904-232A2031S10100 906-552A1012D10200 911-221A2021S10100 912-312A1012D10100
917-B88C201AH70201 918-415K3028S40000 918-468K2029Y50000 920-A62A2021S10104
920-C62A2021S10103 920-F52A2021S10105 912-112A2021S10100 905-761A2032S10200
908-351A1011D10100 904-232B2032S10100 907-312A1101Y10210 916-151A1022Y10200
919-162A1012D10400 920-A62A2021S10108