
SGR-36

For use on 92 mm sq. fans
RoHS Compliant

.xxx ± 0.005 .xx ± 0.02 ANG. ± 1.5"

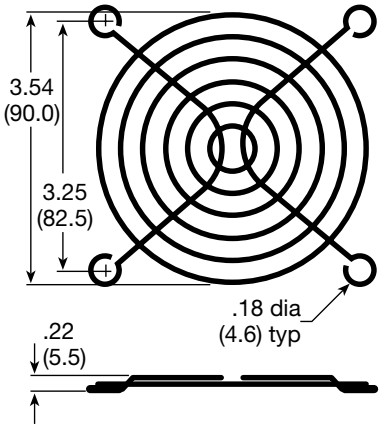

- Bright nickle chrome plated finish 0.0005.
- Meets UL 0.25 inch maximum spacing plug gage test.
- Steel wire rings 1.6 mm (0.063") D., ribs 1.8 mm (0.072") D., bright basic wire.
- Weld joints to withstand minimum of 220 lbs. separation force.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

MECHATRONICS:

MXB9733H24B-BSR UF15KC23-BWHNR UF25GC12-BTHR-B1 UF80A23-BTHR MS2507M12D-RSR MSI1967H24B1+7-BBR SGR-36 G8015L05B-RGR F6025L12B-FHR F8025X24B-FHR G1238E12B1+6-FSR-WS G1338S12B-FSR UF80B12-BWHR G5015E12B-RSR MA8025E12D-FSR UF250APA12-H1C2A UF25GCB12-BTHR B1232H24B-BSR E1225E12B2-FSR G9225X12B1-FSR E9225E24B-FSR G1238M48B2-FSR UF15KC12/23-BWHR UF200BMB12-H2C2A G4010E12B1-RSR-WS F1238X24B1-FHR-TTL F8025H05B1-FSR M5210E12C-RSR G1238L24B-FSR MR8032H24B-FSR