
THIS DRAWING IS A CONTROLLED DOCUMENT.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE PER ECO-14-010242	07-07-14	DM	DM

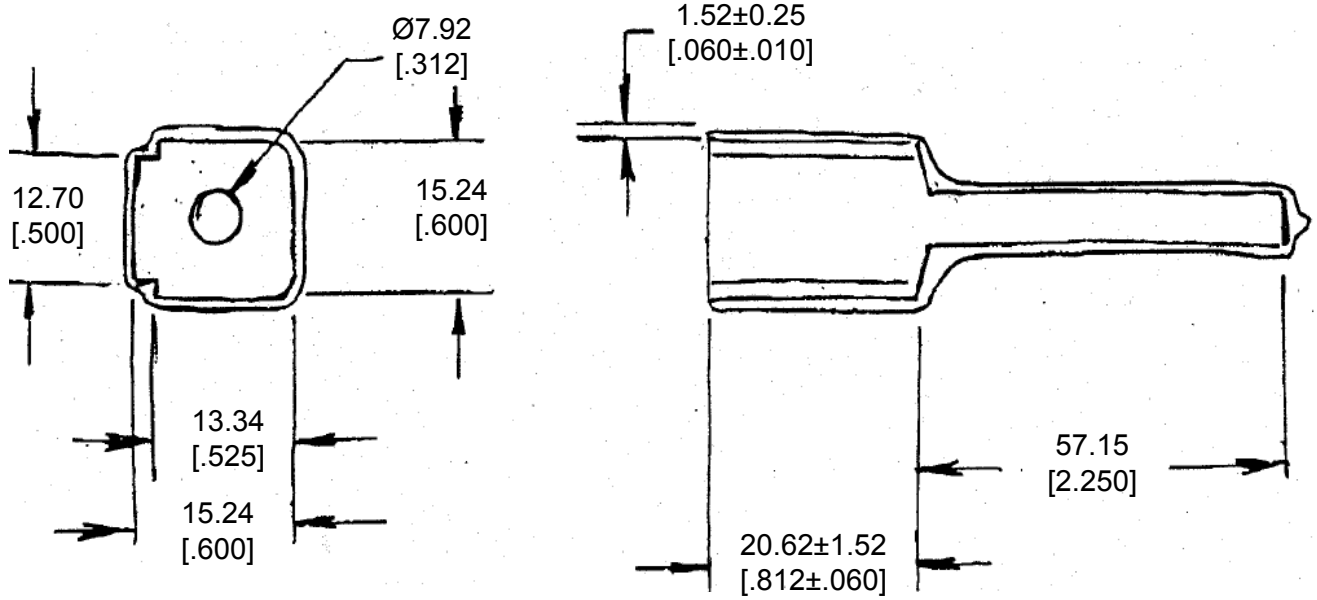

3. PART NO. DTM4P-BT

2. TEMPERATURE RATING: -29°C TO +100°C [-20°F TO +212°F]

1. THIS PART IS USED ON DTM04-4P RECEPTACLES WITH ANY MODIFICATION THAT DOES NOT INCLUDE AN END CAP.

RELEASED FOR PUBLICATION 2014
THIS DRAWING IS UNPUBLISHED. © COPYRIGHT 2014 BY TE CONNECTIVITY ALL RIGHTS RESERVED.

DIMENSIONS: MM [INCH]	DWN D. MEYER 07JUL2014	MATERIAL PVC	FINISH GRAY
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 0.63 [.025] 3 PLC ± 4 PLC ± ANGLES ±5°	CHK B. MILLIGAN 07JUL2014 APVD D. MEYER 07JUL2014 PRODUCT SPEC APPLICATION SPEC WEIGHT 7.00 g	TE Connectivity NAME BOOT, RECEPTACLE, 4PIN DTM SERIES SIZE A4 / CAGE CODE 4AFU8 / DRAWING NO DTM4P-BT / RESTRICTED TO - Customer Drawing / SCALE NONE / SHEET 1 OF 1 / REV A	

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

2380312-2 MPT100C18RF 1969656-1 3-1393225-0 CRGCQ2010J3K3 1-962915-1 141991-2 2310537-1 936348-1 1393431-1 2-292161-3 2005330-1 3430B2F51RTDF 3631B101LL CPF0402B37K4E1 SBCHE154R7K TE50BR39J 2377783-2 650075-000 1-794222-0 U5254-000005-030PA 2834055-1 1743455-2 917696-1 RH73H2A40MKTN ROX05SJ18R SBCHE64R7K SMW73R0JT 175977-2 1903112-2