
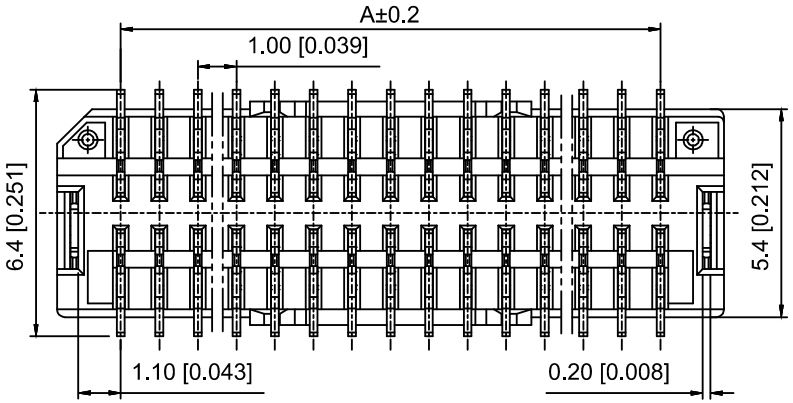


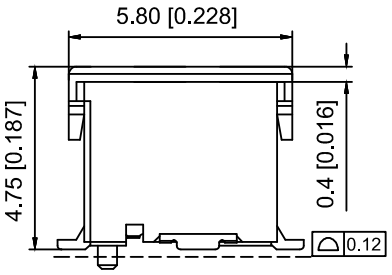

Specifications:

规格：

Voltage rating:50V AC/DC

额定电压： 50V AC/DC

Current rating:1A AC/DC

额定电流： 1A AC/DC

Withstanding voltage:500V AC/minute

耐受电压： 500V AC/ 分钟

Temperature range:-40 ℃-+125℃


温度范围： -40℃-+125℃


Insulation resistance:100MΩ min

绝缘电阻： 100MΩ Min

Contact resistance:20mΩ Max

接触电阻： 20mΩ Max

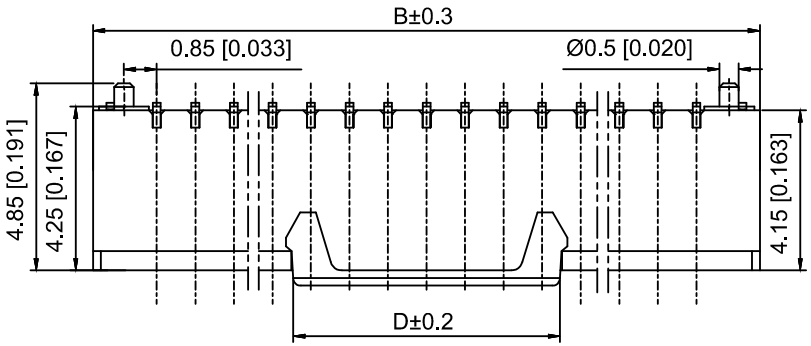

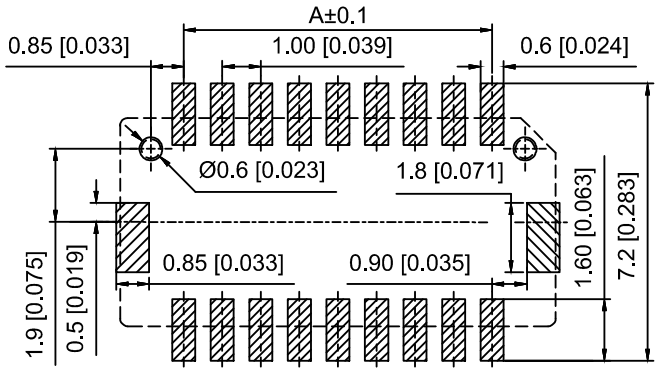

X1011 ① W ② V ③ S - 2x04 ④ ⑤ S - 9T ⑥ ⑦ V01 ⑧

1.Series No

2.Category:W-Wafer

3.Welding Board Angle:V-Stright 180°


4.Welding Way:S-SMT


5.Row.no.Pin no:2xXX-2x02~2x25 Pin


6.Special No:S-Positioning column

7.Material:9T-PA9T UL94V-0

8.Plating:V01-Gold Flash ; SN-Plated Tin

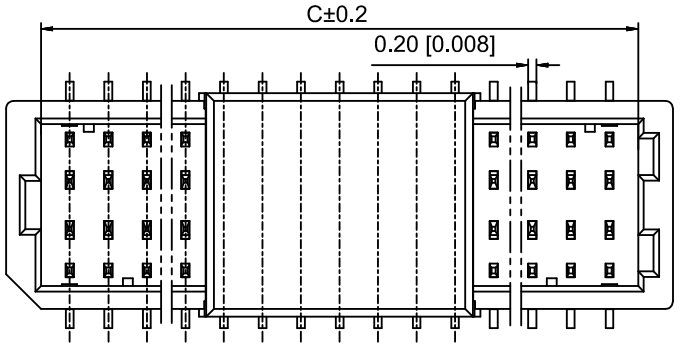





Poles	Dimensions(mm)				Poles	Dimensions(mm)			
	A	B	C	D		A	B	C	D
2x02	1.00	4.30	2.50	麦拉	2x11	10.00	13.30	11.50	7.00
2x03	2.00	5.30	3.50		2x12	11.00	14.30	12.50	
2x04	3.00	6.30	4.50		2x14	13.00	16.30	14.50	
2x05	4.00	7.30	5.50	4.00	2x15	14.00	17.30	15.50	
2x06	5.00	8.30	6.50		2x16	15.00	18.30	16.50	
2x07	6.00	9.30	7.50		2x18	17.00	20.30	18.50	
2x08	7.00	10.30	8.50	7.00	2x20	19.00	22.30	20.50	
2x09	8.00	11.30	9.50		2x25	24.00	27.30	25.50	
2x10	9.00	12.30	10.50		/				

X1011WVS-2x04S-9TV01	PA9T	Phosphor Bronze	X1011H
PART N0	Material	Material(Pin)	Suitable XKB Housing

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

UNSPECIFIED TOLERANCES

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

XKB

XKB INDUSTRIAL PRECISION CO.,LIMITED

DSND		SCALE: N/A
DWN		VIEW:
CHKD		UNIT: mm/in
APPD		SIZE: A4

MODEL TYPE: 1.0mm Crimp Style Connector

PART NO.: X1011WVS-2x04S-9TV01

DWG NO.: X-X1011WVS-2x04S-9TV01

WEIGHT	SHEET	REVISION
	1/1	A0