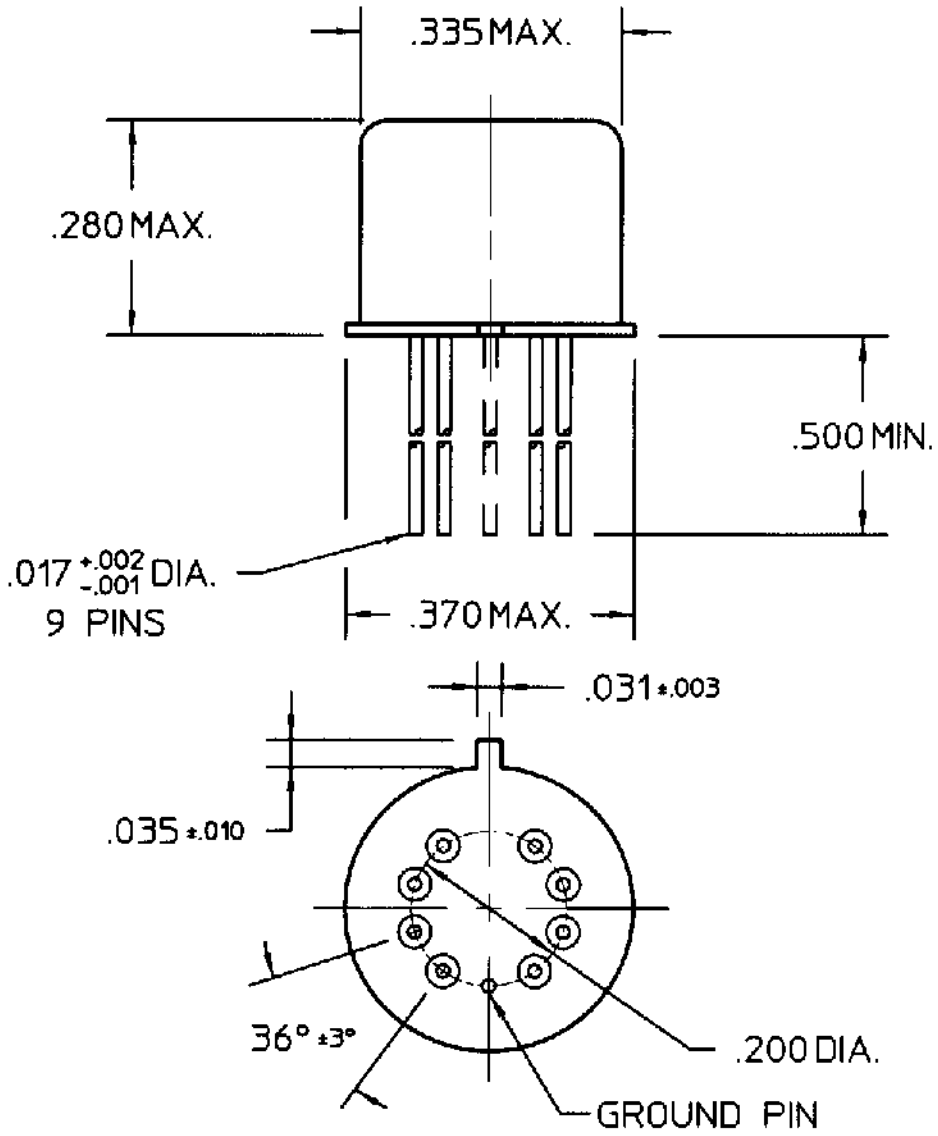


REV. 0
DCO 142077

COIL: @ 25°C


RESISTANCE	390 OHMS ± 10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	7.0 VDC
MUST RELEASE	4.0 VDC MAX, 0.63 VDC MIN

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's
SHOCK 75 g's 6 MS. DURATION
TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX.
RELEASE TIME 4.0 MS MAX.
CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. PBB 6/6/00 K 6/6/00

COMMUNICATIONS INSTRUMENTS, INC.

CUST. OPL
CUST. NO. M39016/15-091L REV.

"JMAD" RELAY

JMACDG-12XL

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

JMACDG-12XL