




ROHS

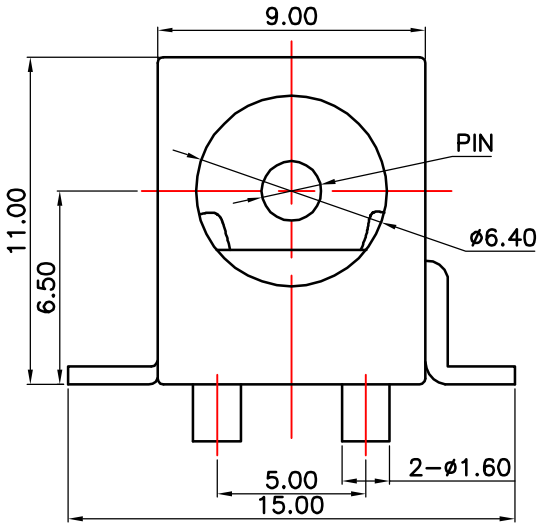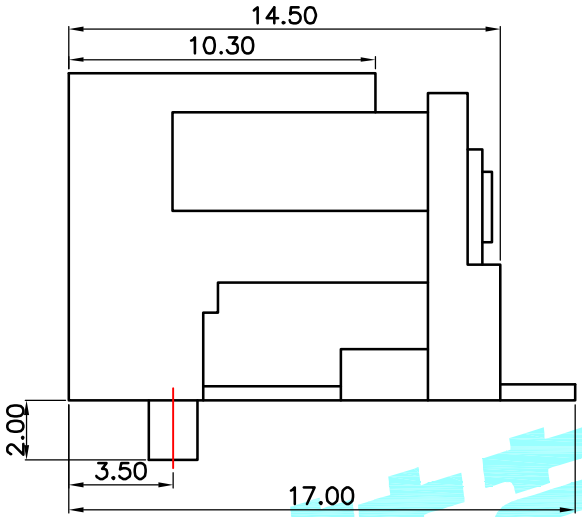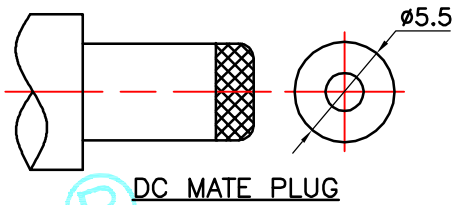







DC–088B–A	DC–088B–B
DC–088C–A	DC–088C–B
	
CIRCUIT DIAGRAM	

P.C.B LAYOUT(Copper–side view)

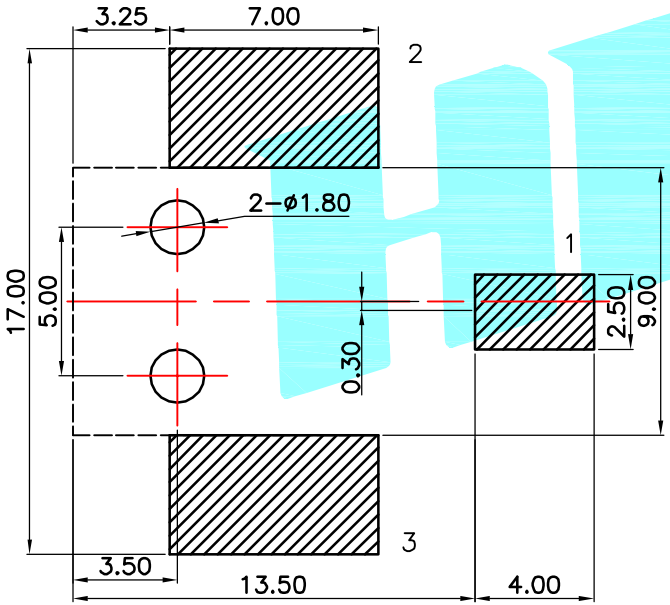

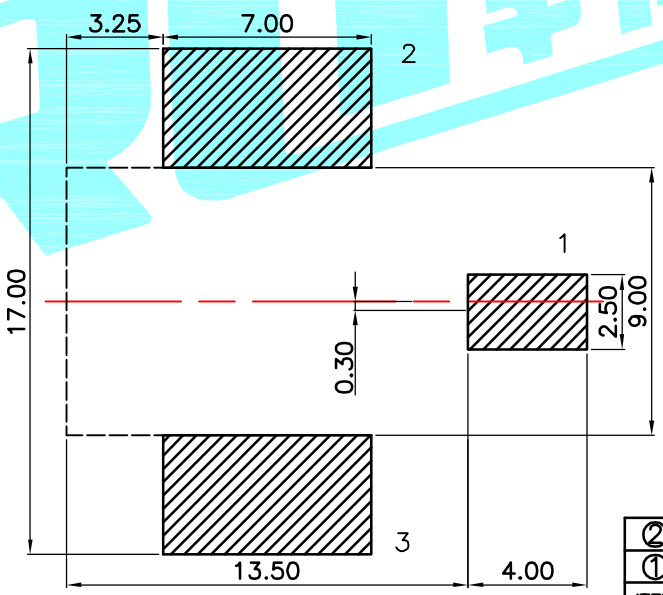

Model No.	1	2
PIN	ø2.0	ø2.5

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:–20℃~70℃
Operating force:3–20N
Operating Life:5,000cycles

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
②	Terminal	——	3	Phosphor bronze	Au Plating	——
①	Housing	——	1	Nylon	Black	——

APPROVALS		DATE	HRO韩荣® ELECTRONICS CO.,LTD
DRAWN	J.X.Zhang	2013/11/11	
CHECKED			TITLE: PHONE JACKES
APPROVALS			PART NO. DC–088B

TOLERANCES ARE			ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
	30~以下	±0.30				
	10~30	±0.20				
	5~10	±0.15	±2°	DRAWING NO.	——	SHEET 1 OF 1
	~ 5	±0.10				

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HRO:

DQ-03BP K5-1617SA-01 PJ-3250-5A TYPE-C-31-M-04 K3-1346S-F1 U-C-M5DW-W-1 U-C-M5SS-Y-1 DC-031A-10A K2-1102DP-S3SW-04 K3-2258S-E1 K8-5851D-L1 PJ-399B-6A U-F-M5DD-Y-L1 ES-07KP K2-1101DF-A4DW-01 K2-1102SP-K4SC-04 K2-1818DP-A3SW-01 SS-22D03-G4 U-F-M5DD-W-L U-M-M5DD-W-2 DA-10RP K2-1102AT-A4CW-01 SIM-08A DS-01BP K2-1102BG-I4CW-01 U-F-M5SS-W-5 U-F-M5DS-Y-1 K2-1102DP-G4SW-04 K2-1102SP-A5SC-04 U-F-M5DD-Y-L