

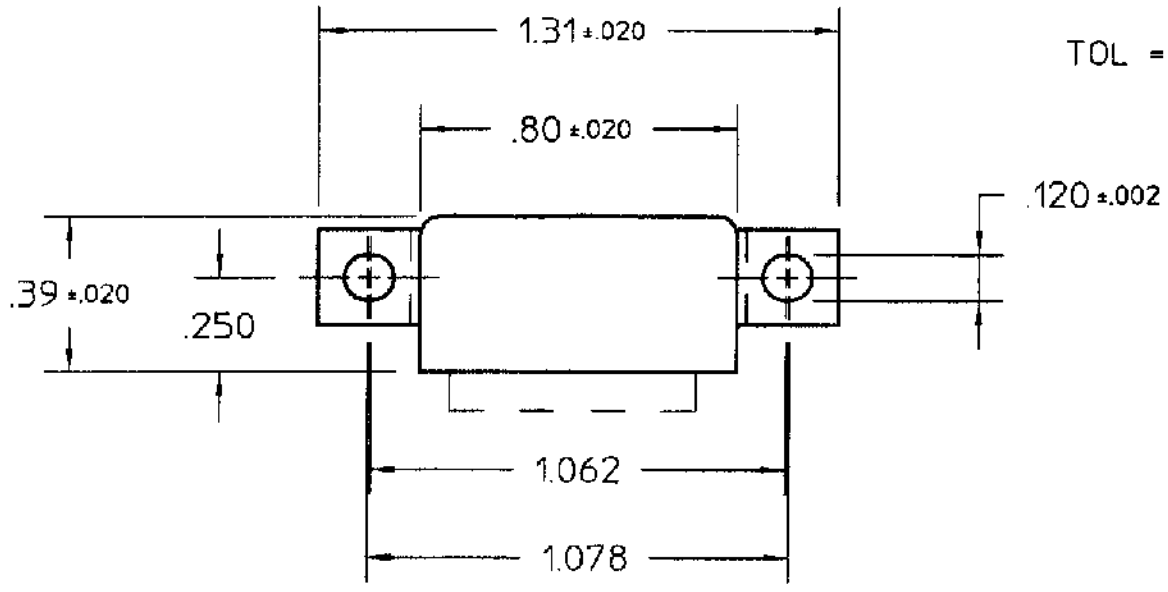


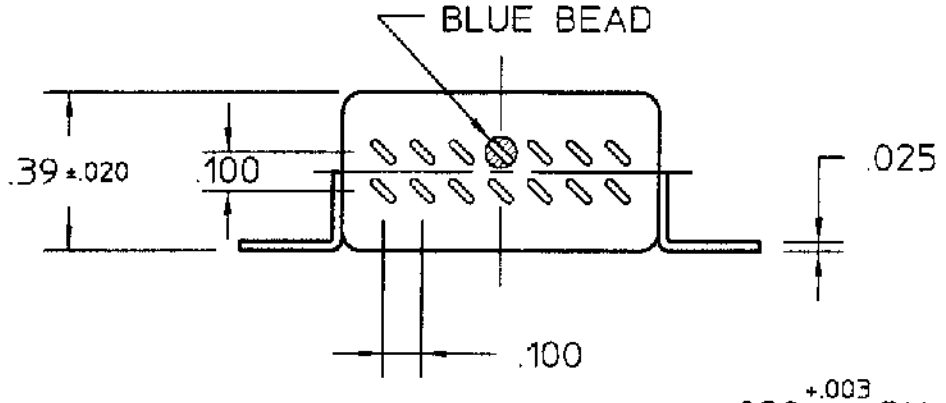

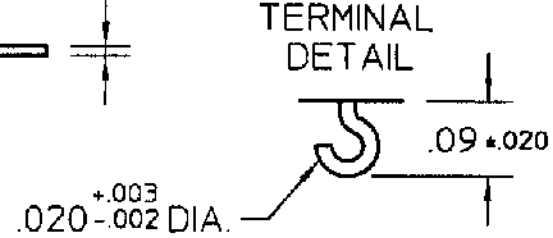

REV. 1
DCO 63333


COIL: @ 25°C

RESISTANCE	390 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.0 VDC
MUST RELEASE	10.1 VDC MAX, 1.84 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 15 g's
SHOCK 100 g's 6 MS. DURATION
TEMPERATURE -65 °C TO +125 °C
NOTES: OPERATE & RELEASE 7 MS MAX. (INCLUDING BOUNCE)

CUSTOMER DATA SHEET

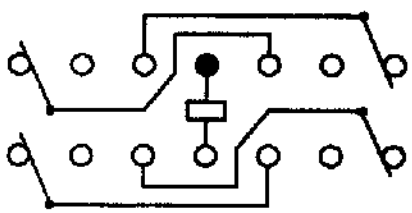

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 2 AMP 28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 4/15/98 | CK. TLG 10-24-00

CII Technologies™
advanced control electronic solutions

CUST. QPL
CUST. NO. M39016/40-002 REV.

"SR" RELAY

SR-7602

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1-794222-0 2005330-1 2310537-1 650075-000 MPT100C18RF SBCHE154R7K 1-962915-1 141991-2
1743455-2 3430B2F51RTDF 917696-1 936348-1 1393431-1 1903112-2 3631B101LL CRGCQ2010J3K3
ROX05SJ18R SMW73R0JT 175977-2 SBCHE64R7K U5254-000005-030PA 1969656-1 2834055-1
3-1393225-0 TE50BR39J 2377783-2 CPF0402B37K4E1 RH73H2A40MKTN 2-292161-3 2380312-2