



RoHS


MAPX	MODIFICATION	DRW	DATE

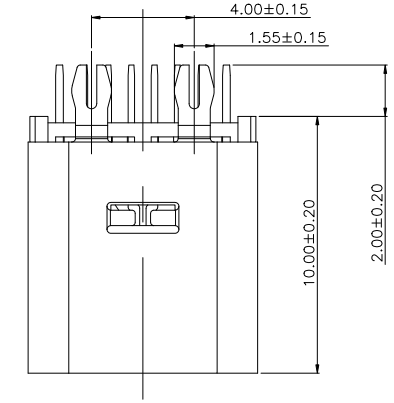


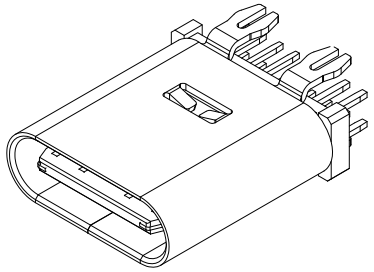



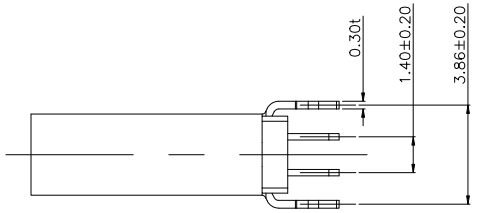

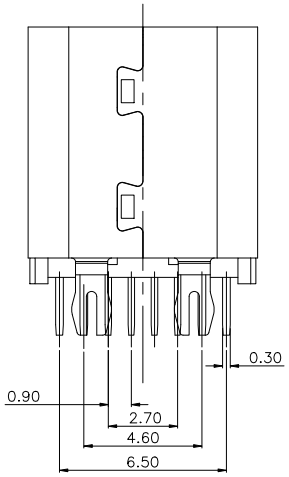



RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

1.MATERIAL:
MOLDING: LCP UL94 V-0
CONTACT:COPPER ALLOY.
GOLD PLATED ON CONTACT AREA,100u''
Min TIN (LEAD FREE) ON SOLDER AREA,
SHELL: SUS304-H,T=0.30±0.03mm
50u" NICKEL PLATING OVER ALL.
SHILD:SUS304-H,T=0.12±0.03mm
2.MECHANICAL:
INSERTION: 5~20N.
EXTRACTION: 8~20N.
DURABILITY: 5000 CYCLES
3.ELECTRICAL:
CURRENT: 3A MIN FOR VBUS;

VOLTAGE: 5VAC MAX
WITHSTANDING VOLTAGE: 100V AC.
CONTACT RESISTANCE: 40m? MAX.
INSULATION RESISTANCE: 100M? MIN.
4.ENVIRONMENTAL
TEMPERATURE RANGE -55°C ~ +85°C

产品图 PRODUCT CHART DWG			
公差一览表 TOLERANCE UNLESS OTHERMSE			
X.	±0.35	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.05	.XXX	±0.5°

深圳市精拓金电子有限公司
Shenzhen Jing Tuo Jin Electronics Co., Ltd.

单位 UNITS	MM	制图 DRAWING	L-S-S	制图料号 PRODUCT PART NO.	918-418K2022Y40000	
比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	TYPE-C3.1母座立式10.0四鱼叉脚不锈钢外壳LCP黑胶 14PIN	
日期 DATE	2021-03-10	核准 APPD	黄国荣	角法 VIEW		版本 VER A0

您正在使用 ZWCAD 2022 个人版，不得用于商业用途， 详情请咨询4007-182-588。

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

905-761A2032S10200 908-351A1011D10100 912-312A1012D10100 920-A62A2021S10104
904-331B2032S10200 907-312A1101Y10210 918-318K2023C40005 907-111A1022D10200
916-151A1022Y10200 917-P81A202ES60201 918-468K2029Y50000 906-262A1021D10200
911-221A2021S10100 920-A64A2091S101A3 920-C62A2021S10103 904-232B2032S10100
906-552A1012D10200 906-752B1114D10200 912-112A1011D10100 912-112A2021S10100
917-B88C201AH70201 920-A62A2021S10108 920-F52A2021S10105 904-232A2031S10100
920-C52A2021S10105 910-151A2021D10100 918-415K3028S40000 918-418K2022Y40011
919-162A1012D10400 920-154A2021Y10110