




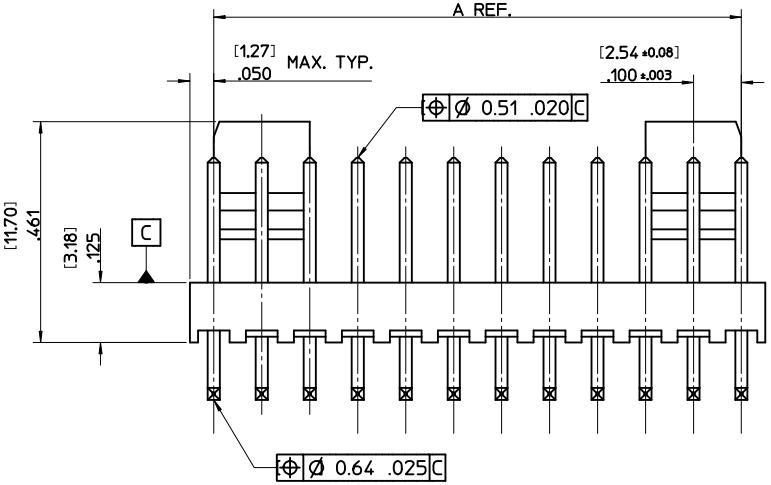

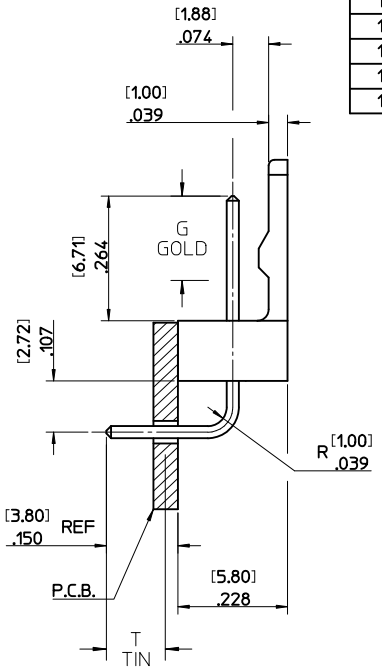

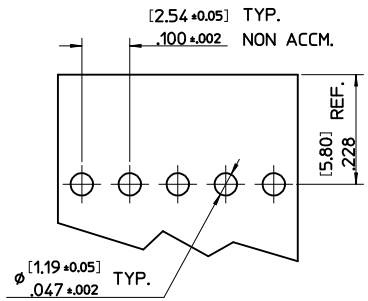

RECOMENDED P.C.B. BOARD

NO. OF CCTS	DIM. A	DIM. B
2	2.54/.100	5.08/.200
3	5.08/.200	7.62/.300
4	7.62/.300	10.16/.400
5	10.16/.400	12.70/.500
6	12.70/.500	15.24/.600
7	15.24/.600	17.78/.700
8	17.78/.700	20.32/.800
9	20.32/.800	22.86/.900
10	22.86/.900	25.40/1.000
11	25.40/1.000	27.94/1.100
12	27.94/1.100	30.48/1.200
13	30.48/1.200	33.02/1.300
14	33.02/1.300	35.56/1.400
15	35.56/1.400	38.10/1.500
16	38.10/1.500	40.64/1.600

PIN FINISH:
REFLOWED MATTE TIN:
0.00152/.000060 MIN OVER
0.00127/.000050 MIN NICKEL.

GOLD LOC G	N/A
TIN LOC T	OVERALL

ENG. NO.	PART NO.
AE-7395-2B	22-05-7028
AE-7395-3B	22-05-7038
AE-7395-4B	22-05-7048
AE-7395-5B	22-05-7058
AE-7395-6B	22-05-7068
AE-7395-7B	22-05-7078
AE-7395-8B	22-05-7088
AE-7395-9B	22-05-7098
AE-7395-10B	22-05-7108
AE-7395-11B	22-05-7118
AE-7395-12B	22-05-7128
AE-7395-13B	22-05-7138
AE-7395-14B	22-05-7148
AE-7395-15B	22-05-7158
AE-7395-16B	22-05-7168

PIN FINISH:
SELECT GOLD:
0.00051/.000020 MIN
SELECT MATTE TIN:
0.00254/.000100 OVER
0.00127/.000050 MIN NICKEL.

GOLD LOC G	4.57/.180
TIN LOC T	3.43/.135

ENG. NO.	PART NO.
AE-7395-2BG	22-12-4022
AE-7395-3BG	22-12-4032
AE-7395-4BG	22-12-4042
AE-7395-5BG	22-12-4052
AE-7395-6BG	22-12-4062
AE-7395-7BG	22-12-4072
AE-7395-8BG	22-12-4082
AE-7395-9BG	22-12-4092
AE-7395-10BG	22-12-4102
AE-7395-11BG	22-12-4112
AE-7395-12BG	22-12-4122
AE-7395-13BG	22-12-4132
AE-7395-14BG	22-12-4142
AE-7395-15BG	22-12-4152
AE-7395-16BG	22-12-4162

NOTES:-
1. MATERIALS:
   WAFER: NYLON 6/6, UL 94, V-0, NATURAL COLOUR
   PIN: [0.64]/0.25 BRASS
2. FINISH: SEE CHART
3. PRODUCT SPECIFICATION: PS-99020-0088
4. PACKAGING SPECIFICATION: PK-7478-001
5. WAFERS STACKABLE END TO END
6. PIN SOLDERABILITY PER MOLEX SPECIFICATION SMES-152
7. PIN PUSH OUT FORCE [0.907 KG]/2.0 LBS MIN.
8. PARTS TO BE FLAT WITHIN 0.005 mm/mm or .005 IN/IN
9. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

AE-7395-N B _

NO. OF CCTS.

WAFER ASSY. OPTION

PLATING TYPE
BLANK: TIN
G: SELECT GOLD

CHANGE PLATING
EC NO: UCP2012-1821 2011/12/22
DRWN:MMSTROH 2012/01/03
CH'KD:MKIPPER 2012/02/02
APPR:FSMITH
DESCRIPTION
REV: C

QUALITY SYMBOLS
E =0
F =0
P =0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .010
2 PLACES	± 0.25	± .015
1 PLACE	± 0.38	± ---
ANGULAR ± 2 °		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM/IN
SCALE: 5:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: JDENNEHY DATE: 2005/05/13
CHECKED BY: GMCSWEENEY DATE: 2005/05/27
APPROVED BY: JDENNEHY DATE: 2005/05/27
MATERIAL NO.: SEE CHART

TITLE: WAFER, R/A FRICTION LOCK (2.54)/.100 CENTERS (0.64)/.025 SQ. PIN
MOLEX INCORPORATED
DOCUMENT NO.: SD-7395-001
SHEET NO.: 1 OF 1
SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

molex:

152670357 190730231 417920538 447691602 152670251 190690096 447641402 5046940301
760475001 151660057 190990009 190990010 397730002 0190690033 190670071 430451220
436803002 447642001 759001161 152670269 0190700155 430450225 439151216 444280402
0436802002 152660117 398800403 459705185 0436400901 151670255