NOTES:

1. MATERIALS AND FINISHES:
   BODY, NUT-HEX & RING - BRASS, NICKEL PLATING
   CONTACT - BeCu, SILVER PLATING
   INSULATOR - PTFE, NATURAL
   GASKET - SILICONE RUBBER, RED

2. ELECTRICAL:
   A. IMPEDANCE: 50 OHM


3. MECHANICAL:
   A. DURABILITY: 500 CYCLES MIN.
   B. TEMPERATURE RANGE: -65° C TO +165° C

4. PACKAGING:
   A. QUANTITY: SINGLE PACK
   B. MARKING: BAG TO BE MARKED
      "AMPHENOL RF, 82-515, AND DATE CODE"


THIRD ANGLE PROJ.


REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
--	RELEASE TO MFG.	--	--	
M	REDRAWN IN PRO-E & COD SHEET ADDED	9/3/15	50266	AAP



SCALE 1.000

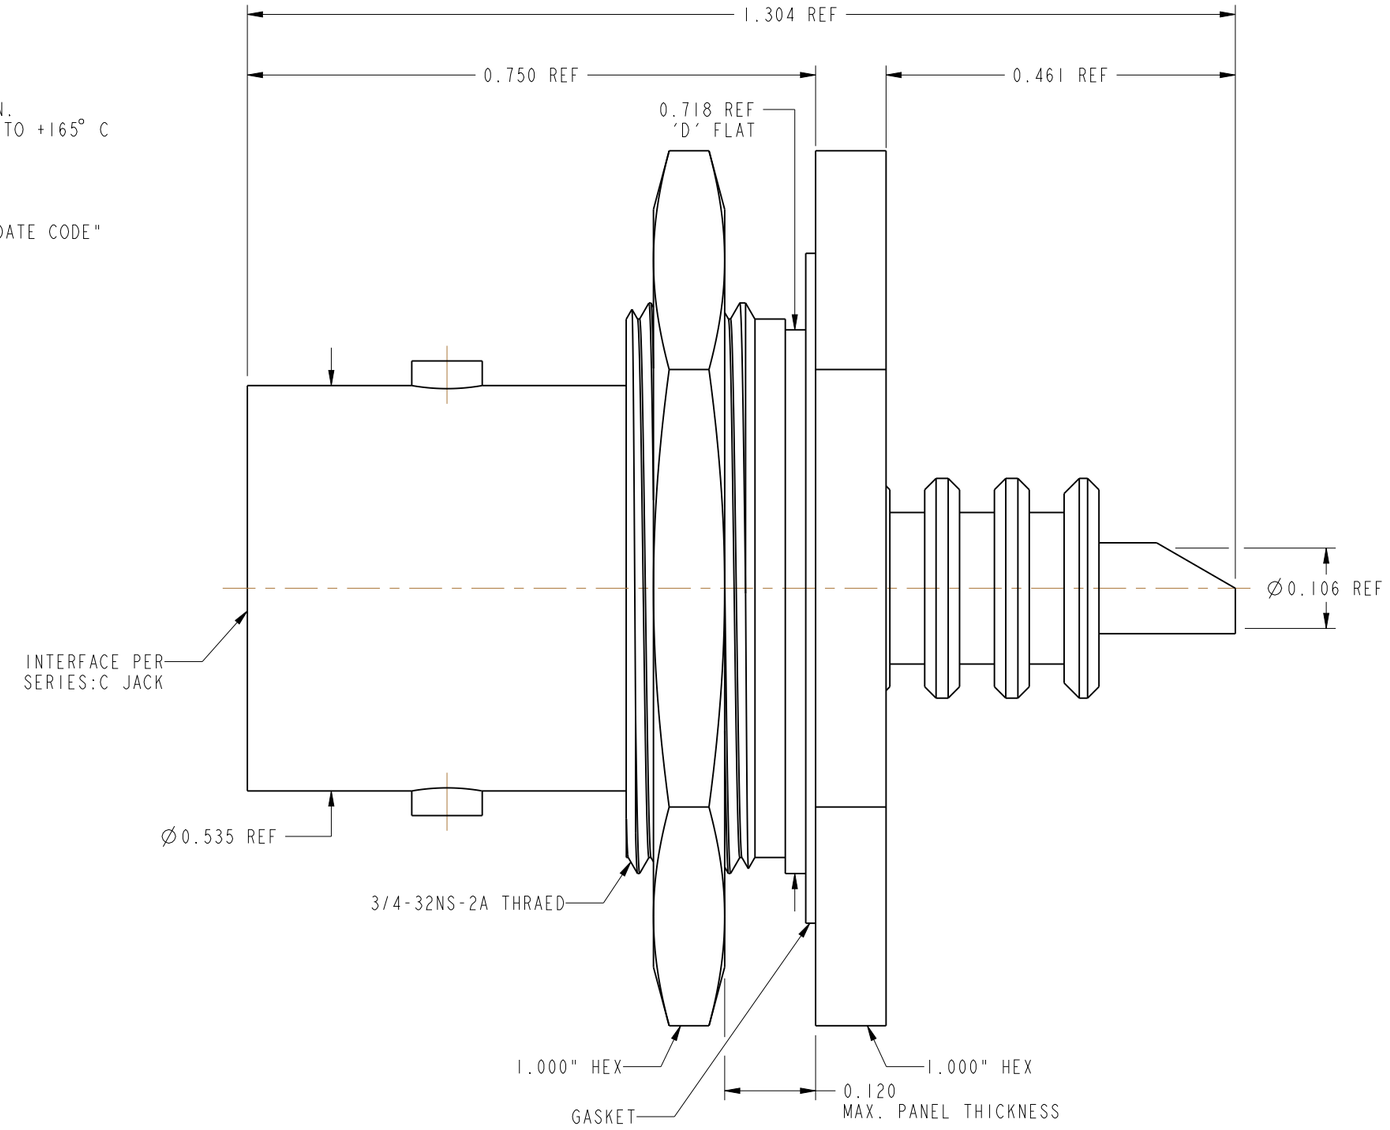

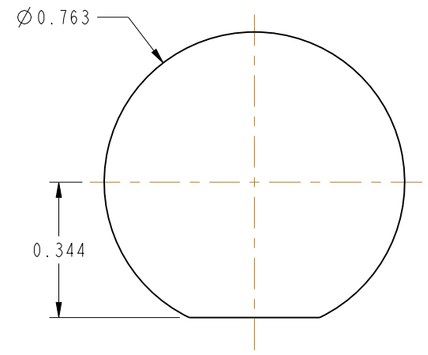

RECOMMENDED MOUNTING
HOLE DIMENSIONS

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:
2 PLACE DECIMAL ±.015 (0,381 mm) | 3 PLACE DECIMAL ±.005 (0,127 mm) | ANGLES ± 1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL
SEE NOTES

REFERENCE
U.S. NAVY
REQ-10593
CONFIGURATION LEVEL: In Work

FINISH

DRAWN A ARUN PRABU — DATE 07-Nov-14
ENGINEER D.ROYCE — DATE 07-Feb-92
APPROVED K. CAPOZZI — DATE 7/23/15
CAD FILE

TITLE
C STR JACK HIGH VOLTAGE
RECEPTACLE UG-634/U

SCALE: 5.0:1.0 | SHEET 2 OF 2
DWG SIZE B | REV M

Amphenol RF
www.amphenolrf.com

DRAWING NO.82-515
ITEM NO.82-515
PART NO.82-515

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

70218-1116LF 70430-164LF 86093967896755LF 86130202123355E1LF 91614-403ALF 95157-140LF RJE061661210 68000-236HLF 86093488314745V1LF 54202-G0805CLF 65781-158 68001-200HLF 76384-316LF CD15S13E4RV09LF LD15P33E4GV00LF 68001-108HLF 68002116HLF 70234-112LF 54202-S08-07LF 86093968813H45V1LF DCMF37P LD25S33E4GV00LF RJSBE5080C2 67996-204HLF 69192-408HLF DAPO15S365TLF DEM09P032N 86093968191755E3LF 863013A D15P13A6RV12LF