

THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
B	Updated Notes and Graphics	10-21-14	LY

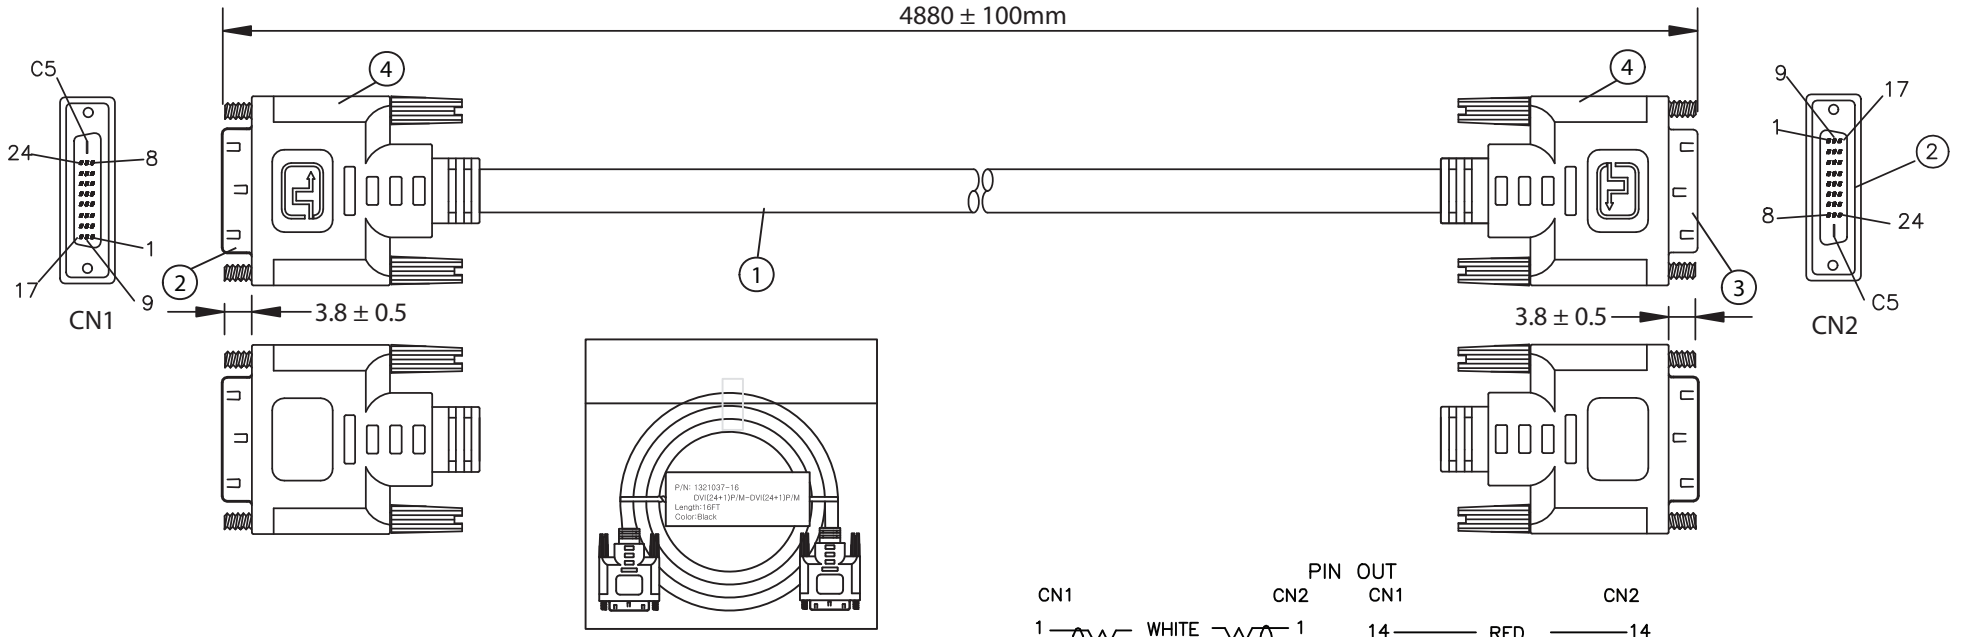

PIN OUT

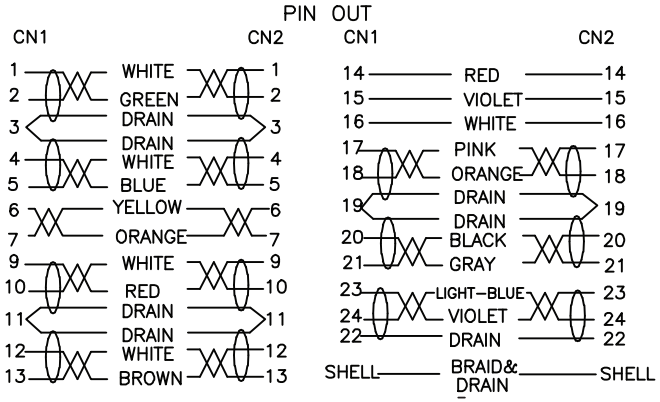

CONTROLLED

NOTES:

1. CABLE: UL20276
   (28AWG*1PR+EAM)*7+28AWG*1PR+28AWG*3C+AEB(AL) 65%
   OUTER JACKET: BLACK, OD: 8.5 ± 0.2mm
2. CONNECTOR: DVI 24+1 MALE
   INSULATOR: BLACK
   PIN G/F
   GOLD PLATED SHELL
   THUMB SCREW: 2.8*32 4-40UNC
3. CONNECTOR: DVI 24+1 MALE
   INSULATOR: BLACK
   PIN G/F
   GOLD PLATED SHELL
   THUMB SCREW: 2.8*32 4-40UNC
4. PVC MOLDED: COLOR V398 30P BLACK
5. ELECTRICAL TEST:
   <1>.100% OPEN SHORT & MISS WIRE TEST
   <2>. INSULATION RESISTANCE: AC300V DC400V 10M ohm MIN.
   <3>. CONDUCTOR RESISTANCE: 4 ohm MAX.
6. PACKING: 1PC/POLYBAG

Dim range (mm)	Tolerance +/- (mm)
0-1	0.15
1-6	0.20
6-18	0.30
18-50	0.50
50-120	0.70
120-250	0.90
250-500	1.20

Qualtek Electronics Corp.
WCI DIVISION

Part Number: 1321037-16 RoHS Compliant

Description: DVI (24+1)P/M - DVI (24+1)P/M

	UNIT: mm	REV. B
Drawn / Date	Checked / Date	Approved / Date
B. Grubb 01-25-07	01-25-07	JJH / 01-25-07

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Qualtek Electronics:

Q-716 Q2-F3X-1-01-MS50FT Q2-Z-1/2-01-QB6IN-14 370021-01 723W-X2/04 Q-150K-1/4-02-QB48IN-25 Q2-F-1 1/2-01-QB6IN-5 Q2-F-3/32-01-QB48IN-25 Q2-F-1-01-QB6IN-8 Q2-F-3/32-01-QB6IN-32 Q2-F-QK2-01-6IN-82 Q2-F4X-4-01-QB48IN-2 Q5-3X-1 1/2-01-QB6IN-5 Q2-F-3/32-01-MS100FT 311027-01 FAD1-12025CBMW12 Q2-Z-1/8-01-QB48IN-25 Q5-3X-3/16-01-QB48IN-25 09362-M/60 377009-01 742W-15/04 862-06/001 Q2-3X-3/16-01-QB48IN-25 Q2-F3X-1 1/2-01-QB6IN-5 Q2-Z-RK1-3/64-01-6IN-40 Q5-3X-1-01-SS25M Q-150K-3/8-02-QB48IN-25 06325-M 719W-00/03 Q2-F-1 1/2-01-QB48IN-5