
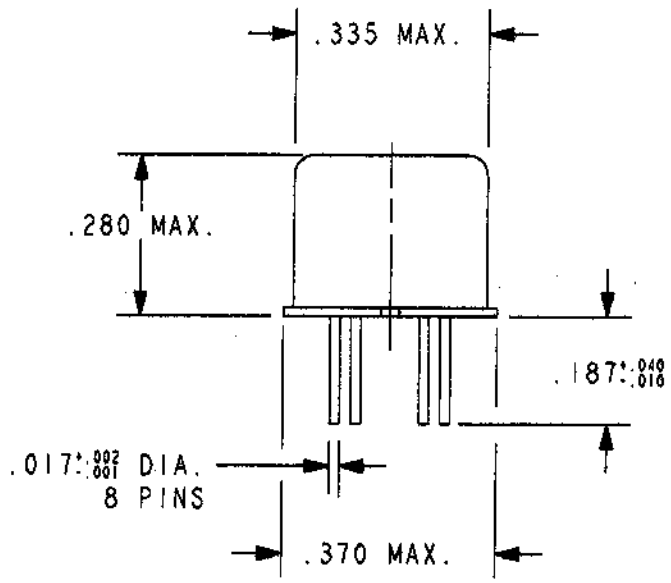


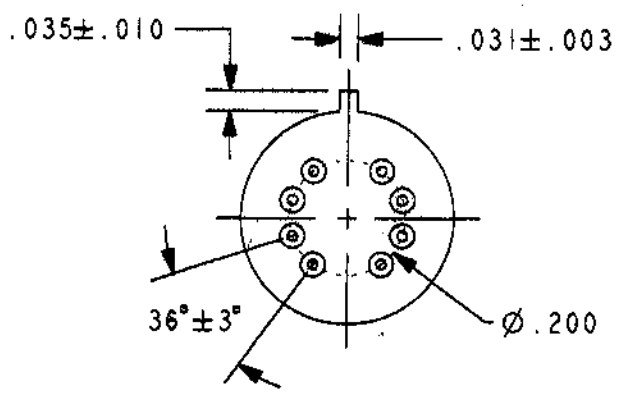

REV. 0

DCO 143223

COIL: @ 25°C

RESISTANCE	1560 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	14.2 VDC
MUST RELEASE	8.0 VDC MAX, 1.37 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX.
RELEASE TIME 4.0 MS MAX.
CONTACT STABILIZATION TIME 2.0 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 9/20/01 CK. [signature] 9/20/01

CII Technologies™
advanced control electronic solutions

CUST: QPL
CUST. NO. M39016/15-039M REV.

"JMAD" RELAY

JMAPD-26XM

F-718 REV. 3

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

SMW73R0JT 1-794222-0 2005330-1 2377783-2 2380312-2 1-962915-1 3631B101LL 917696-1 MPT100C18RF 141991-2 1743455-2 3430B2F51RTDF 1903112-2 3-1393225-0 936348-1 RH73H2A40MKTN ROX05SJ18R SBCHE64R7K 650075-000 CRGCQ2010J3K3 1393431-1 U5254-000005-030PA 175977-2 1969656-1 2310537-1 2834055-1 TE50BR39J 2-292161-3 CPF0402B37K4E1 SBCHE154R7K