




MAPX	MODIFICATION	DATE

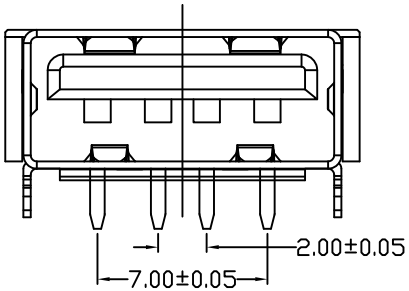

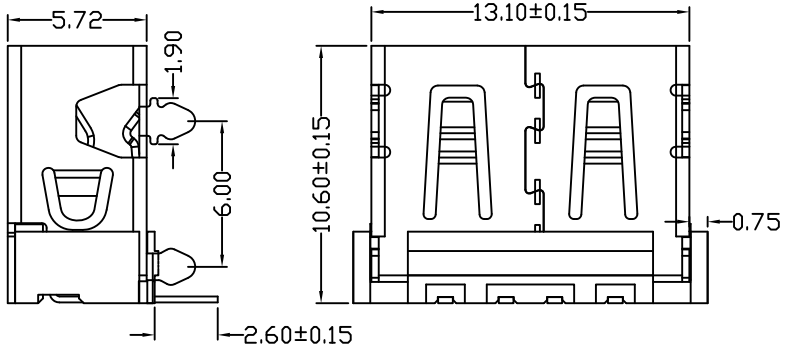

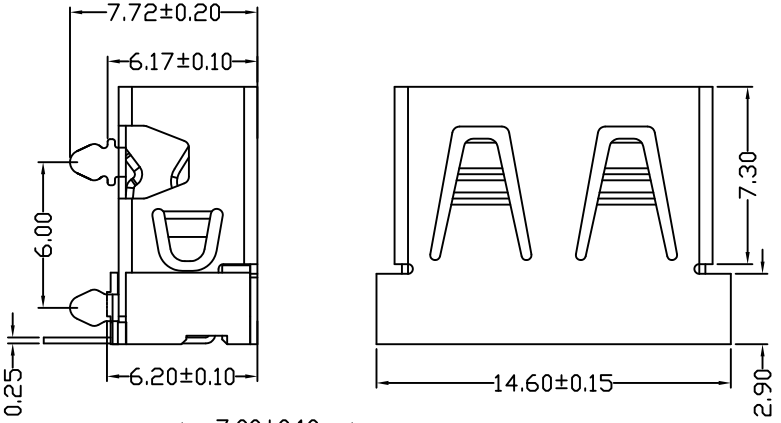

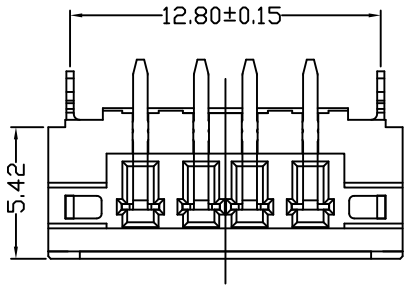

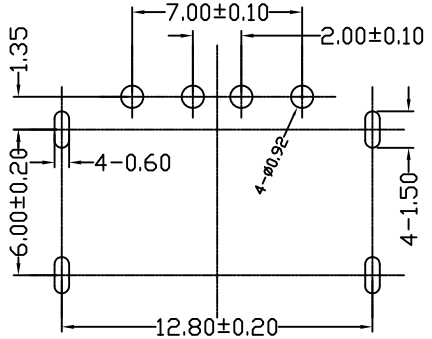

PCB HOLES

Specification:

1.Electrical Characteristics:

Dielectric Withstanding Voltage: AC 500V/1MINUTE.
Insulation Resistance: 1000 MΩ\Min.
Contact Resistance: 30 mΩ\ Max.

2.Mechanical Characteristics:

INSERTION FORCE: 30N(3.06Kgf) MAX
EXTRACTION FORCE: 10~30N(1.02~3.06Kgf)
Durability:1500cycles.EXTRACTION FORCE:10~30N(1.02~3.06Kgf)

3. Material:

Terminal: Phosphor Bronze, C5191/C2680R-EH T=0.25
Plating: Gold 0.76 um Min plating over 1.27 um Min Nickel underplate, 2.54 um Min Sn selective plating on solder tail;
Shell: Bronze, C2680R-H =0.30mm
Plating: Nickel underplate 2.54 um Min;
Housing: LCP Black

4.Environmental:

Operating Temperature: 0°C to +85°C.

产品图
PRODUCT CHART DWG

公差一览表 TOLERANCE UNLESS OTHERMSE			
X.	±0.25	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.05	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	914-492A1011D10200
比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	AF10.6苹果款四脚大小弹铜壳PBT白胶偏蓝DIP
日期 DATE	2013.10.24	核准 APPD		角法 VIEW	版本 VER A□

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

904-232B2032S10100 906-262A1021D10200 918-418K2022Y40011 920-A62A2021S10108
920-A64A2091S101A3 920-C62A2021S10103 906-752B1114D10200 918-415K3028S40000
920-154A2021Y10110 920-A62A2021S10104 906-552A1012D10200 907-111A1022D10200
917-P81A202ES60201 904-232A2031S10100 910-151A2021D10100 912-112A1011D10100
912-112A2021S10100 916-151A1022Y10200 920-C52A2021S10105 920-F52A2021S10105
904-331B2032S10200 908-351A1011D10100 911-221A2021S10100 918-318K2023C40005
919-162A1012D10400 918-468K2029Y50000 905-761A2032S10200 907-312A1101Y10210
912-312A1012D10100 917-B88C201AH70201