


ROHS

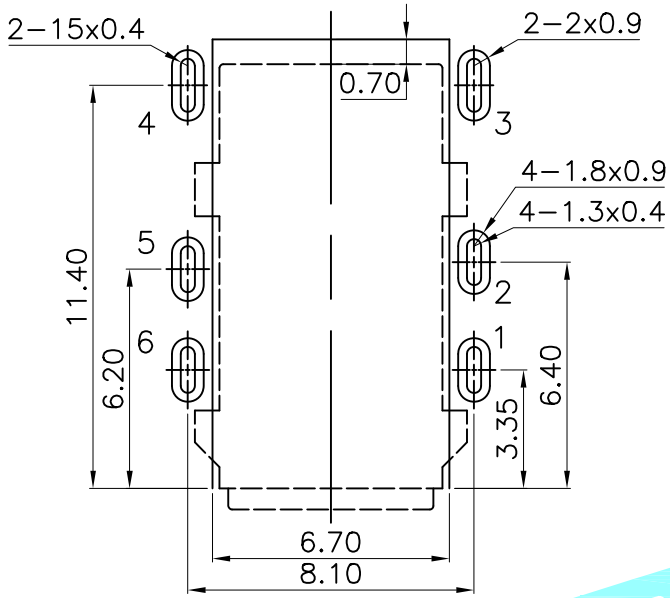



P.C.B LAYOUT

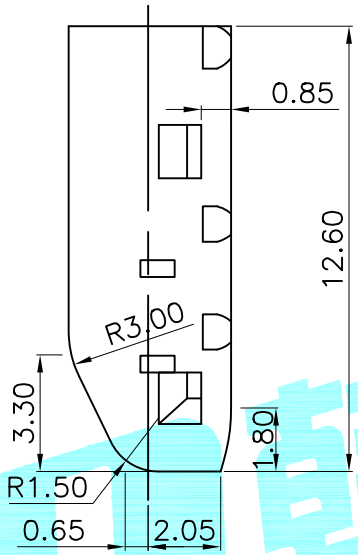



CIRCUIT DIAGRAM

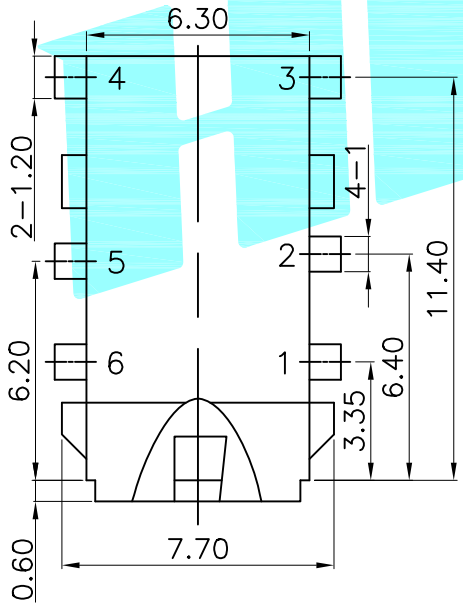

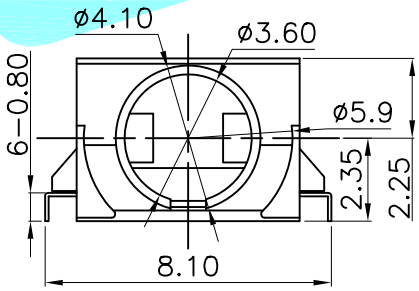

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:−20℃~70℃
Operating force:3−20N
Operating Life:5,000cycles

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
②	Terminal	——	6	Phosphor bronze	Au Plating	——
①	Housing	——	1	Nylon	Black	——

APPROVALS		DATE	HRO韩荣® ELECTRONICS CO.,LTD	
DRAWN	J.X.Zhang	2013/11/11		
CHECKED			TITLE:	PHONE JACKES
APPROVALS			PART NO.	PJ−602
TOLERANCES ARE	30~以下 ±0.30; 10~30 ±0.20; 5~10 ±0.15; ~5 ±0.10; ANGLE ±2°		UNIT: mm	SCALE: 1:1 PROJ:
			DRAWING NO.	—— SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HRO:

DA-10RP K2-1102DP-G4SW-04 K2-1102DP-S3SW-04 SS-22D03-G4 K2-1102BG-I4CW-01
K2-1102SP-A5SC-04 K8-5851D-L1 U-C-M5DW-W-1 U-C-M5SS-Y-1 U-F-M5DD-W-L DQ-03BP
K2-1101DF-A4DW-01 K2-1818DP-A3SW-01 K3-2258S-E1 DC-031A-10A K2-1102SP-K4SC-04
K3-1346S-F1 K5-1617SA-01 U-F-M5DS-Y-1 U-M-M5DD-W-2 U-F-M5DD-Y-L PJ-399B-6A TYPE-C-31-M-04
U-F-M5DD-Y-L1 DS-01BP ES-07KP K2-1102AT-A4CW-01 PJ-3250-5A SIM-08A U-F-M5SS-W-5