



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A2	ECR-17-002665	27FEB2017	BS	CW
	A3	ECR-18-018974	04DEC2018	WQR	CW
	A4	ECR-19-010616	08JUL2019	CD	CW
	B	ECR-21-109004	19AUG2021	WQR	CW

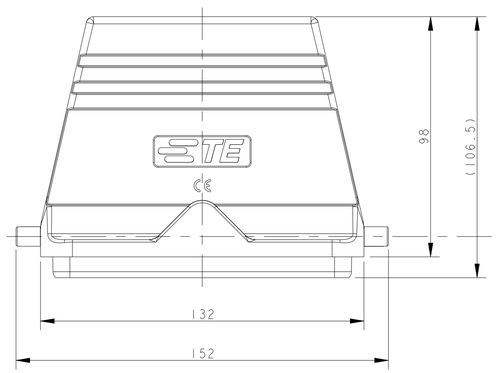




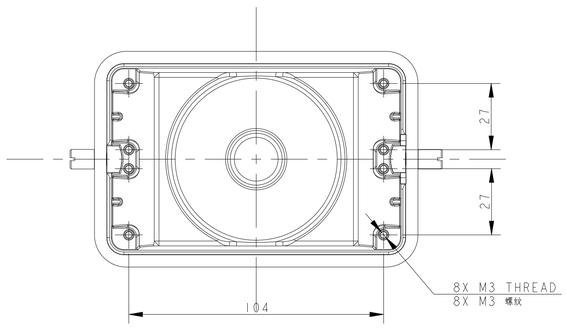

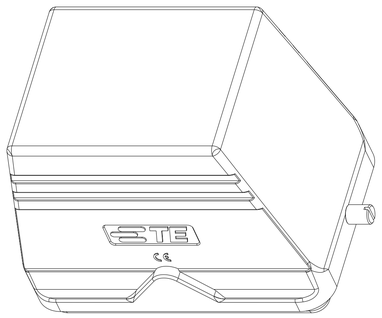


TYPE 1: H48B HOOD, NO ENTRY,2 EAR

类型1: H48B上壳, 无线孔, 2耳

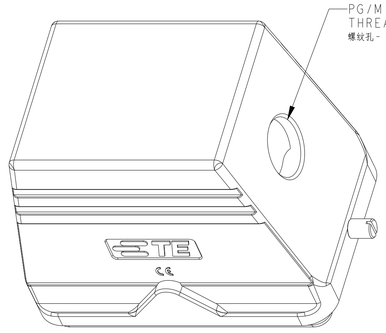


TYPE 2: H48B HOOD, SIDE ENTRY,2 EAR
OTHER SPEC REFER TO TYPE 1

类型2: H48B上壳, 侧出, 2耳
未注规格参照类型1

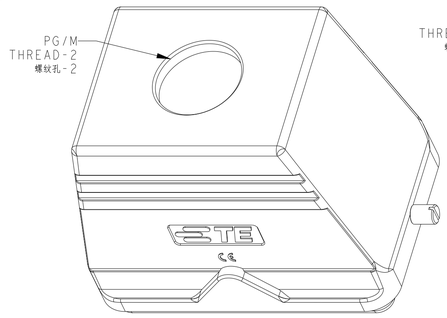


TYPE 3: H48B HOOD, TOP ENTRY,2 EAR
OTHER SPEC REFER TO TYPE 1

类型3: H48B上壳, 顶出, 2耳
未注规格参照类型1

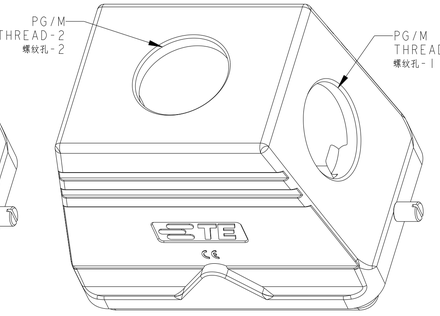


TYPE 4: H48B HOOD, SIDE/TOP ENTRY,2 EAR
OTHER SPEC REFER TO TYPE 1&TYPE 2

类型4: H48B上壳, 侧顶出, 2耳
未注规格参照类型1和类型2

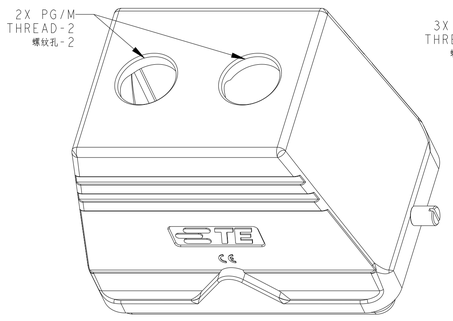


TYPE 5: H48B HOOD, TOP ENTRY (2 HOLE),2 EAR
OTHER SPEC REFER TO TYPE 1

类型5: H48B上壳, 顶出(2孔), 2耳
未注规格参照类型1

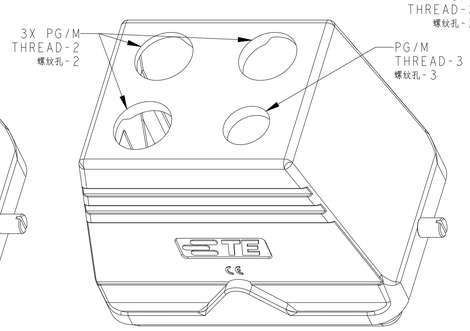

TYPE 6: H48B HOOD, TOP ENTRY (4 HOLE),2 EAR
OTHER SPEC REFER TO TYPE 1

类型6: H48B上壳, 顶出(4孔), 2耳
未注规格参照类型1

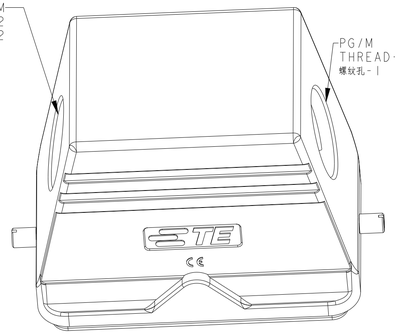

TYPE 7: H48B HOOD,SIDE ENTRY(2 HOLE),2 EAR
OTHER SPEC REFER TO TYPE 1

类型7:H48B上壳,侧出(2孔),2耳
未注规格参照类型1

PART NUMBER 料号	PART DESCRIPTION 描述	PG/M THREAD-1 螺纹孔-1	PG/M THREAD-2 螺纹孔-2	PG/M THREAD-3 螺纹孔-3	TYPE 类型
T10X0480000-000	H48B-TG/S-RO-XX	-	-	-	TYPE 1
T1310480125-000	H48B-TS-RO-M25	M25	-	-	TYPE 2
T1310480129-000	H48B-TS-RO-PG29	PG29	-	-	
T1310480132-000	H48B-TS-RO-M32	M32	-	-	
T1310480136-000	H48B-TS-RO-PG36	PG36	-	-	
T1310480140-000	H48B-TS-RO-M40	M40	-	-	
T1310480142-000	H48B-TS-RO-PG42	PG42	-	-	
T1310480148-000	H48B-TS-RO-PG48	PG48	-	-	
T1310480150-000	H48B-TS-RO-M50	M50	-	-	
T1320480129-000	H48B-TG-RO-PG29	-	PG29	-	TYPE 3
T1320480132-000	H48B-TG-RO-M32	-	M32	-	
T1320480136-000	H48B-TG-RO-PG36	-	PG36	-	
T1320480140-000	H48B-TG-RO-M40	-	M40	-	
T1320480142-000	H48B-TG-RO-PG42	-	PG42	-	
T1320480150-000	H48B-TG-RO-M50	-	M50	-	
T1320480163-000	H48B-TG-RO-M63	-	M63	-	
T1320484040-000	H48B-TG/TS-RO-M40/M40	M40	M40	-	TYPE 4
T1320485040-000	H48B-TG/TS-RO-M50/M40	M40	M50	-	
T1320480225-000	H48B-TG-RO-2M25	-	2X M25	-	TYPE 5
T1320482520-000	H48B-TG-3M25M20	-	3X M25	M20	TYPE 6
T1310480229-000	H48B-TS-RO-2PG29	PG29	PG29	-	TYPE 7

H48B HOOD, NO ENTRY, 2 EAR, POWDER COATED, GREY
H48B上壳,无线孔,2耳,灰色粉末喷涂
H48B HOOD, SIDE ENTRY M25, 2 EAR, POWDER COATED, GREY
H48B上壳,侧出M25,2耳,灰色粉末喷涂
H48B HOOD, SIDE ENTRY PG29, 2 EAR, POWDER COATED, GREY
H48B上壳,侧出PG29,2耳,灰色粉末喷涂
H48B HOOD, SIDE ENTRY M32, 2 EAR, POWDER COATED, GREY
H48B上壳,侧出M32,2耳,灰色粉末喷涂
H48B HOOD, SIDE ENTRY PG36, 2 EAR, POWDER COATED, GREY
H48B上壳,侧出PG36,2耳,灰色粉末喷涂
H48B HOOD, SIDE ENTRY M40, 2 EAR, POWDER COATED, GREY
H48B上壳,侧出M40,2耳,灰色粉末喷涂
H48B HOOD, SIDE ENTRY PG42, 2 EAR, POWDER COATED, GREY
H48B上壳,侧出PG42,2耳,灰色粉末喷涂
H48B HOOD, SIDE ENTRY PG48, 2 EAR, POWDER COATED, GREY
H48B上壳,侧出PG48,2耳,灰色粉末喷涂
H48B HOOD, SIDE ENTRY M50, 2 EAR, POWDER COATED, GREY
H48B上壳,侧出M50,2耳,灰色粉末喷涂
H48B HOOD, TOP ENTRY PG29, 2 EAR, POWDER COATED, GREY
H48B上壳,顶出PG29,2耳,灰色粉末喷涂
H48B HOOD, TOP ENTRY M32, 2 EAR, POWDER COATED, GREY
H48B上壳,顶出M32,2耳,灰色粉末喷涂
H48B HOOD, TOP ENTRY PG36, 2 EAR, POWDER COATED, GREY
H48B上壳,顶出PG36,2耳,灰色粉末喷涂
H48B HOOD, TOP ENTRY M40, 2 EAR, POWDER COATED, GREY
H48B上壳,顶出M40,2耳,灰色粉末喷涂
H48B HOOD, TOP ENTRY PG42, 2 EAR, POWDER COATED, GREY
H48B上壳,顶出PG42,2耳,灰色粉末喷涂
H48B HOOD, TOP ENTRY M50, 2 EAR, POWDER COATED, GREY
H48B上壳,顶出M50,2耳,灰色粉末喷涂
H48B HOOD, TOP ENTRY M63, 2 EAR, POWDER COATED, GREY
H48B上壳,顶出M63,2耳,灰色粉末喷涂
H48B HOOD, TOP/SIDE ENTRY M40, 2 EAR, POWDER COATED, GREY
H48B上壳,顶/侧出M40,2耳,灰色粉末喷涂
H48B HOOD, TOP ENTRY M50, SIDE ENTRY M40, 2 EAR, POWDER COATED, GREY
H48B上壳,顶出M50,侧出M40,2耳,灰色粉末喷涂
H48B HOOD, TOP ENTRY 2M25, 2 EAR, POWDER COATED, GREY
H48B上壳,顶出2M25,2耳,灰色粉末喷涂
H48B HOOD, TOP ENTRY 3M25, IM20, 2 EAR, POWDER COATED, GREY
H48B上壳,顶出3M25,IM20,2耳,灰色粉末喷涂
H48B HOOD, SIDE ENTRY 2PG29,2 EAR, POWDER COATED, GREY
H48B上壳,侧出2PG29,2耳,灰色粉末喷涂

NOTES:
1. TECHNICAL CHARACTERISTICS:
BODY MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE TREATMENT: POWDER-COATED, GREY
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
主体材料: 铝合金
表面处理: 灰色粉末喷涂
防护等级: IP65(配合)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm
TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±
MATERIAL - -
FINISH - -

DWN DAVID LI 08JUN2015
CHK CHRIS WANG 08JUN2015
APVD XU XIANG 08JUN2015
PRODUCT SPEC 108-137013
APPLICATION SPEC 114-137013
WEIGHT -

TE Connectivity

NAME H48B-TG/TS-RO-PG/M

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	-	C-T13X048XXXX000	-

CUSTOMER DRAWING SCALE 1:1 SHEET 1 OF 1 REV B

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

TE50BR39J 141991-2 3631B101LL 1393431-1 936348-1 RH73H2A40MKTN U5254-000005-030PA
1-962915-1 1903112-2 2005330-1 2310537-1 CPF0402B37K4E1 2-292161-3 2834055-1 650075-000
ROX05SJ18R 2380312-2 917696-1 SMW73R0JT 3-1393225-0 3430B2F51RTDF SBCHE154R7K
SBCHE64R7K 1743455-2 2377783-2 CRGCQ2010J3K3 MPT100C18RF 1-794222-0 175977-2 1969656-1