CS8364C



50 Amp, 3-Phase 250V AC, Non-NEMA, 3P, 4W, Black & White Locking Connector, Industrial Grade, Grounding, California-Style(CS)- BLACK-WHITE

Leviton's Black &White 50 Amp, Non-NEMA line of industrial grade locking blade devices feature rugged construction that resists impact, sunlight, chemicals and rough use. All contacts and blades are solid one-piece construction for superior conductivity. Corrosion resistant versions feature nickel plated contacts and blades, plus stainless steel shrouds and screws. The ergonomic, fluted-body design with radial gripping edge is ideal for gripping and pulling. The unique cord clamp accepts a wide range of cord sizes, providing a secure grip without damaging the cord. And, they are backed by a limited lifetime warranty.

UPC Code : 078477326398

Country Of Origin : Mexico

Technical Information

Electrical Specifications

Amperage : 50 A

Current Interrupting : Certified for current interrupting at full rated current

Dielectric Voltage Withstand : 2000V minimum per UL 498

Grounding : Grounding

Maximum Working Voltage : 3-Phase 250V as rated

Phase : 3-Phase

Pole : 3

Temperature Rise : Max 30ºC temp rise at full-rated current after 150 cycles of OL at 150% rated DC current

Voltage : 250 VAC

Wire : 4

Environmental Specifications

Environment : Dry

Flammability : UL94V-2

Operating Temperature : -40°C to 75°C

Material Specifications

Assembly Screws : Brass

Cable Clamp Screw : Philips Head, SS 304

Center Pin : SS 302/304

Color : Black-White

Contact - Binding Plate : 0.100inch thick Brass

Contact - Spring Value : 0.041inch thick Brass

Contact Rivet : Brass

Dust Shield : Santoprene TPE

Face Module : Nylon

Ground Post : Brass

Ground Shunt : Bronze

Housing Material : Nylon

Standard Cable Clamp : Nylon

Terminal Block : 0.062inch thick Copper

Terminal Set Screw : SS 302/304

Wiring Chamber : Nylon

Mechanical Specifications

Cord Range : .680 - 1.125

Product ID : Ratings and Catalogue No. molded into face and stamped into shroud

Terminal Accom. : #10 min to #4max AWG Solid or Stranded Wire

Terminal ID : X, W, Y, Z and Green for ground

Torque Range : allen wrench to 35 inch-lbs

Product Features

Brand : Black and White

Color : Black-White

Device Type : Locking Connector

NEMA : Non-NEMA

Standards and Certifications


CSA C22.2 No. 42 : File 152105

NOM : 057

RoHS : Compliant

UL 498 : File E13399

Warranty : Limited Lifetime Warranty

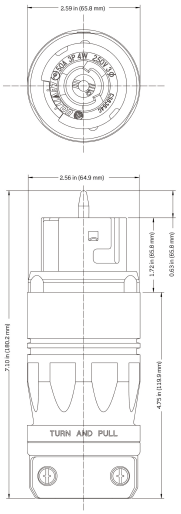

SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
JOB NUMBER:		

Leviton Manufacturing Co., Inc.
201 North Service Road, Melville, NY 11747
Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.
165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 · FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.
Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com
© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.
If you would like to know where your local Leviton office is located please go to:
www.leviton.com/international/contacts/

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

LEVITON:

5100P-9W 5252-I OSC10-M0W CS836-5C 1306 16D33-UY 2713 5261-GY 5320-4 5410 1221-2I 15378-CWP 16362-HGW 5320-WCP 560P9WLEV 80401-GY 2430 CS8364C 5269-C 5325 GFTR1 10051 13353-N 5266-CB 5666-C 7314-C CS8369 G5362-WTG 5279-C GFPL1-PLE