


NOTES:


1. Circuit: ON/OFF
2. Operation force: 500±200gf
3. Electrical rating: 8A 250VAC ULCUL CQC
   15A 125VAC ULCUL CQC
   12(6)A 250VAC ENEC
4. Contact resistance: <50mΩ
5. Insulation resistance: >100MΩ
   (500VDC between open contacts)
6. Dielectric strength: >1500V 1 mintute
7. Color: cover is red, body is black.

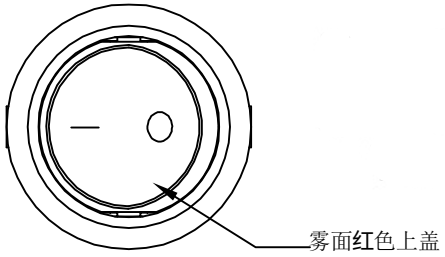


Panel cut out(Thickness: 3mm Max)

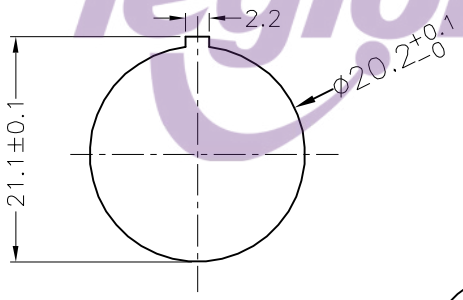


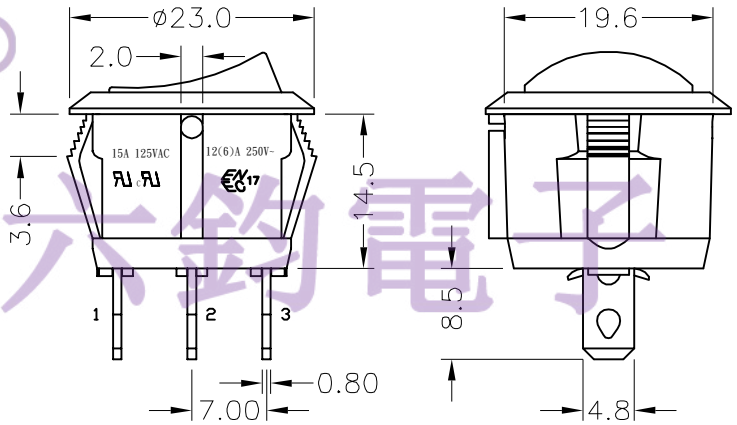


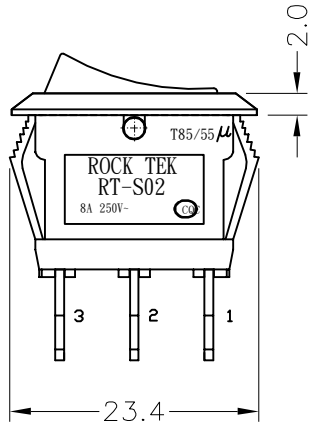

Circuit of Switch







NO.	Name	Material	Q'ty
09	转轴	NICKEL PALTED BRASS	1pcs
08	接触片	C2680 1/2H Ag-plate	1pcs
07	本體	PA66	1pcs
06	上蓋	PA66	1pcs
05	動接點	Ag Clad Copper Alloy	2pcs
04	靜接點	Ag Clad Copper Alloy	2pcs
03	端子	C2680 1/2H Ag-plate	1pcs
02	端子	C2680 1/2H Ag-plate	2pcs
01	弹簧	SWC	1pcs

NO	DESCRIPTION
5	→
4	→
3	→
2	→
1	→

NO	DESCRIPTION
10	→
9	→
8	→
7	→
6	→

DIMENSIONAL TOLERANCES	
RANGE	TOLERANCE
X	±0.4
X.X	±0.3
X.XX	±0.2
ANGLES	±0.5°

APPROVED	CHECKED	DESIGN	DRAWN
			管林华 17.11.13

LEGION ELECTRONIC & HARDWARE CO.,LTD

ALL SIZE ARE IN	MM
SCALE	FIT
MAT'L	***
MATERIAL NO.	RT-S02-127-R4NBR
DRAWING NO.	********
REV	A

legion 大鈞電子 ®