
RoHS COMPLIANT


Pulse Electronics
www.pulseelectronics.com


NOTES:


1. CONNECTOR MATERIAL:

   HOUISING:PA66 BLACK UL94 V-0
   INSERTER:PBT BLACK UL94 V-0
   SHIELD:BRASS
   SHIELD PLATING:NICKEL
   CONTACT:COOPER ALLOY
   CONTACT PLATING:SELECTIVE GOLD,30 MICRO-INCHS MIN IN CONTACT AREA
2. PIN NOT ELECTRICALLY CONNECTED MAYBE OMITTED SEE ELECTRICAL DRAWING FOR OMITTED PINS
3. RJ45 CAVITIES CONFORM TO FCC RULES AND REGULATION PART 68.
4. THE PART IS RECOMMENDDED FOR WAVE SOLDERING PROCESS PEAK SOLDERING TEMPERATURE IS 260° C MAX,10 SECS MAX
5. OPERATING TEMPERATURE T=-40°C TO +85°C.
6. STORAGE TEMPERATURE T=-40°C TO +85°C.

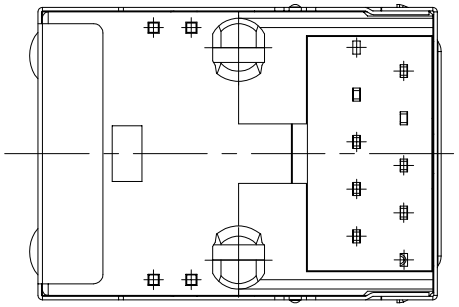

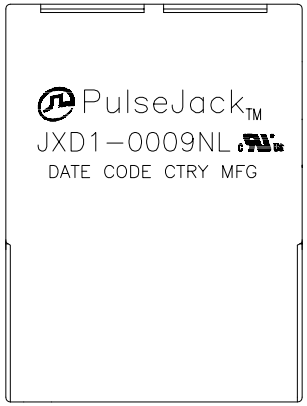

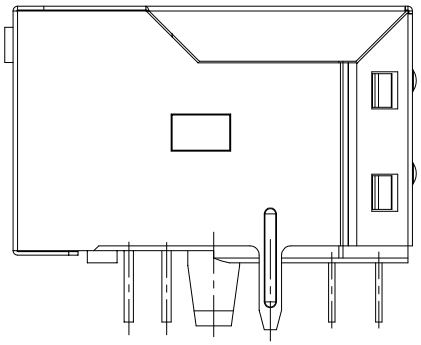

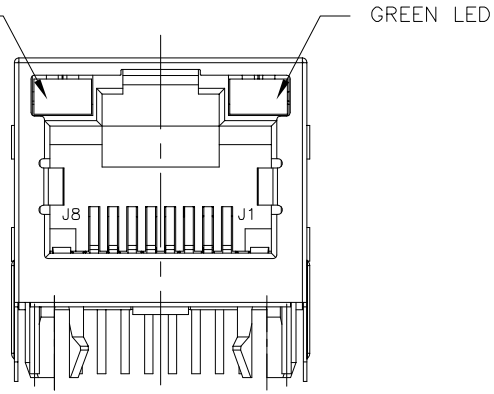



FINAL OUTLINE

© Copyright, 2016. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (01/13/16)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
CONN,RJ45,1X1,100P,1:1,TU	JXD1-0009NL-X1	-	1 OF 5	JXD1-0009NL	A

E-MAIL: PRODINFONETWORK@PULSEELECTRONICS.COM(US), ASIA@PULSEELECTRONICS.COM(Asia) PHONE: USA:858 674 8100, GERMANY:49 7032 78060, SINGAPORE:65 6287 8998, SHANGHAI:86 21 62787060, TAIWAN:886 3 4356768

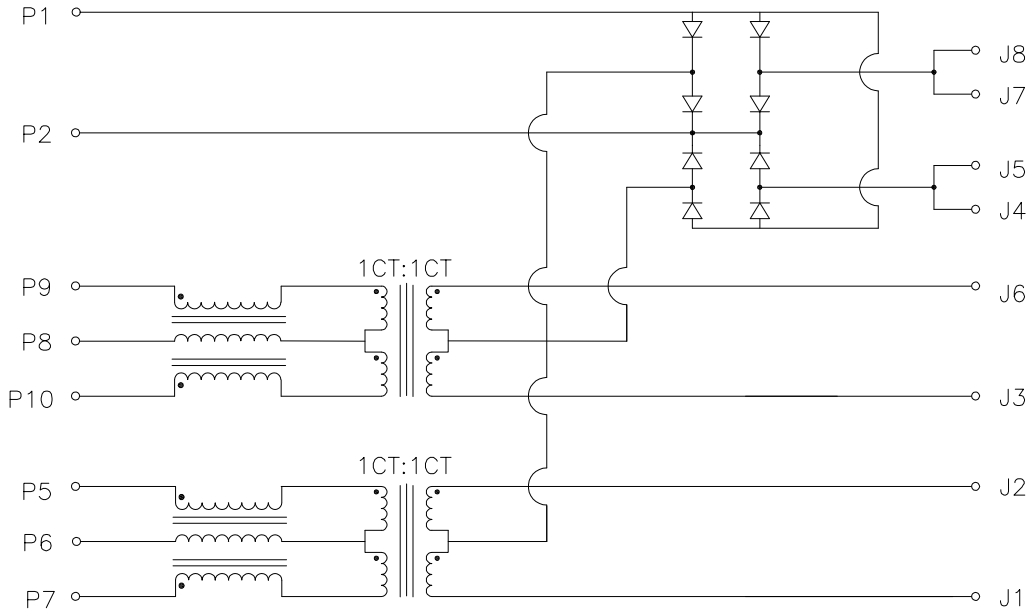



ELECTRONICAL SPECIFICATIONS:

1.0 TURN RATIO @100KHz: (P7~P5):(J1~J2) = 1:1±5%

(P10~P9):(J3~J6) = 1:1±5%

2.0 PRIMARY INDUCTANCE: 350uH MIN @100KHZ,0.1V 8mA DC BIAS

3.0 DC RESISTANCE:(J1~J2):(J3~J6) 1.2 OHMS MAX

4.0 INSERTION LOSS: 1−100MHz −1.2dB MAX

5.0 RETURN LOSS: 1−30MHz −16dB MIN

30−60MHz −12dB MIN

60−80MHz −10dB MIN

6.0 CROSS TALK: 1−100MHz −30dB MIN

7.0 COMMON TO COMMON MODE ATTENUATION: 1−100MHz −30dB MIN

8.0 ISOLATION: PHY SIDE TO LINE SIDE: 500VAC

9.0 DC CURRENT/VOLTAGE RATING−PSE PINS: 350mA @57V(CONTINUOUS)


LED SPECIFICATION:


LED SPECIFICATION			
STANDARD LED	WAVELENGTH	FORWARD V(MAX)	TYP
GREEN	565nm	2.4V	2.2V
YELLOW	590nm	2.5V	2.1V


*WITH A FORWARD CURRENT OF 20mA

@ Copyright, 2016. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (01/13/16)

E−MAIL: PRODINFONETWORK@PULSEELECTRONICS.COM(US), ASIA@PULSEELECTRONICS.COM(Asia) PHONE: USA:858 674 8100, GERMANY:49 7032 78060, SINGAPORE:65 6287 8998, SHANGHAI:86 21 62787060, TAIWAN:886 3 4356768

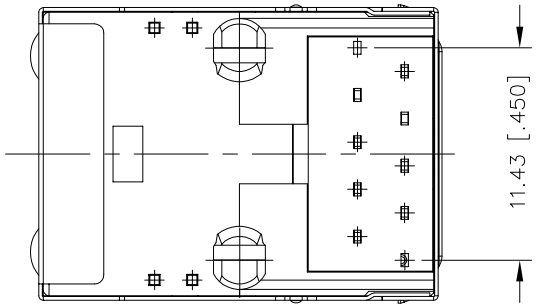

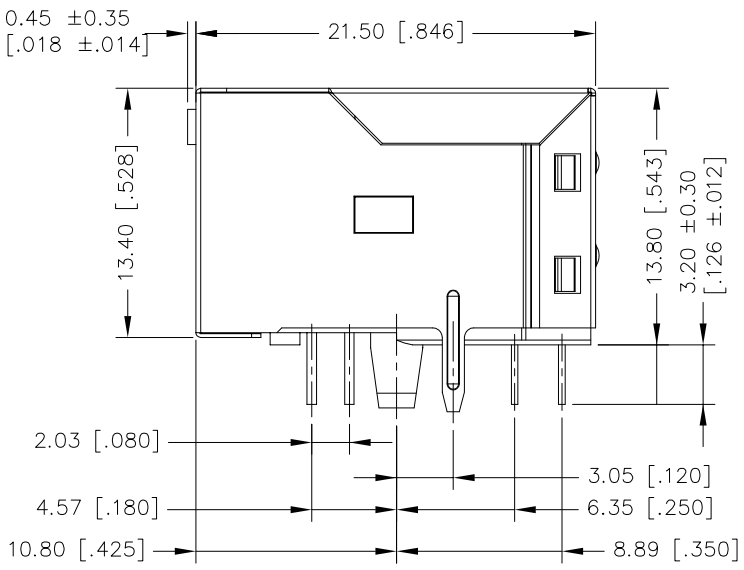


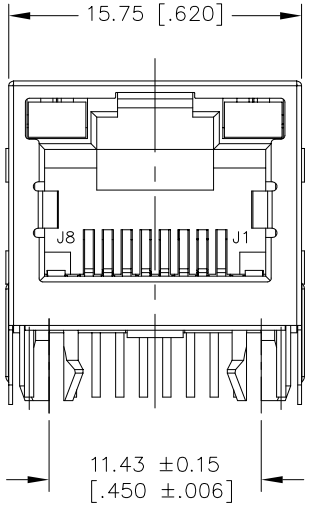


DIMENSIONS ARE IN MILLIMETERS [INCHES] WITH THE FOLLOWING TOLERANCES: [INCHES] ARE FOR REFERENCE ONLY.
X.XX= ±0.25 [±.010]

@ Copyright, 2016. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (01/13/16)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
CONN,RJ45,1X1,100P,1:1,TU	JXD1-0009NL-X1	-	3 OF 5	JXD1-0009NL	A

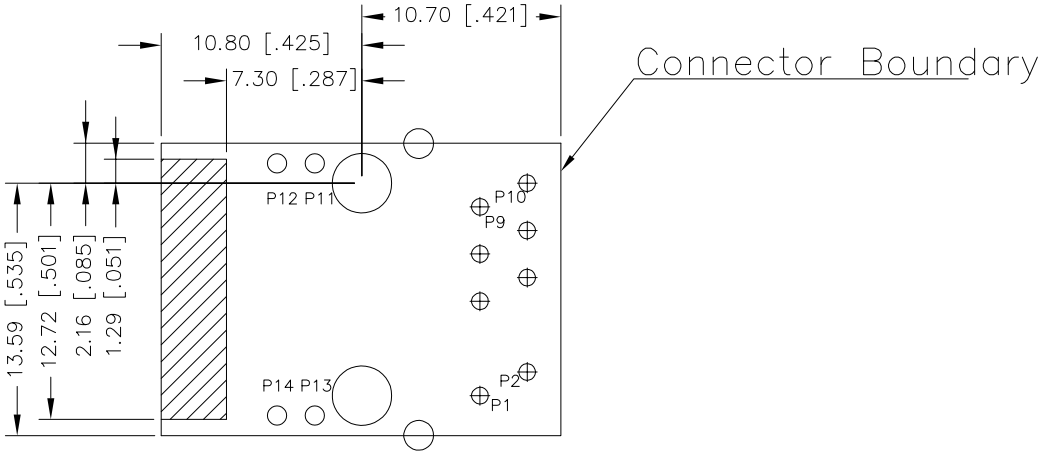

KEEP-OUT AREA (COMPONENT SIDE SHOWN)

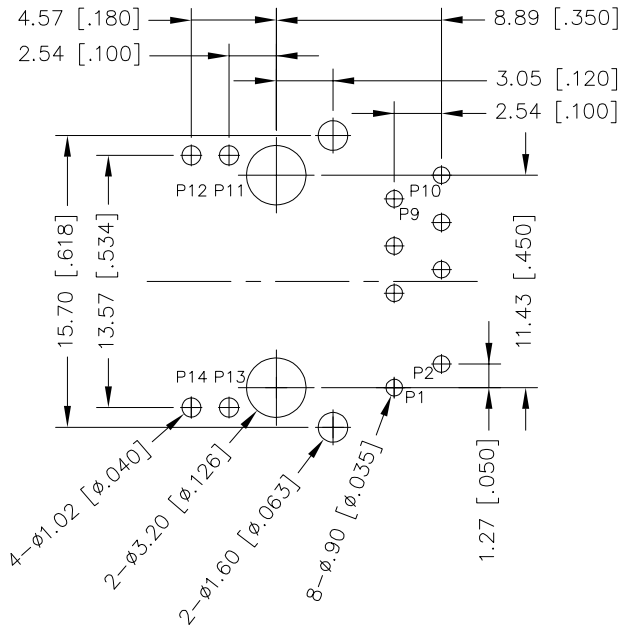


RECOMMENDED PWB LAYOUT
(COMPONENT SIDE SHOWN)

DIMENSIONS ARE IN MILLIMETERS [INCHES] WITH THE FOLLOWING TOLERANCES: [INCHES] ARE FOR REFERENCE ONLY.
X.XX= ±0.10 [±.004]

@ Copyright, 2016. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (01/13/16)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
CONN,RJ45,1X1,100P,1:1,TU	JXD1-0009NL-X1	-	4 OF 5	JXD1-0009NL	A

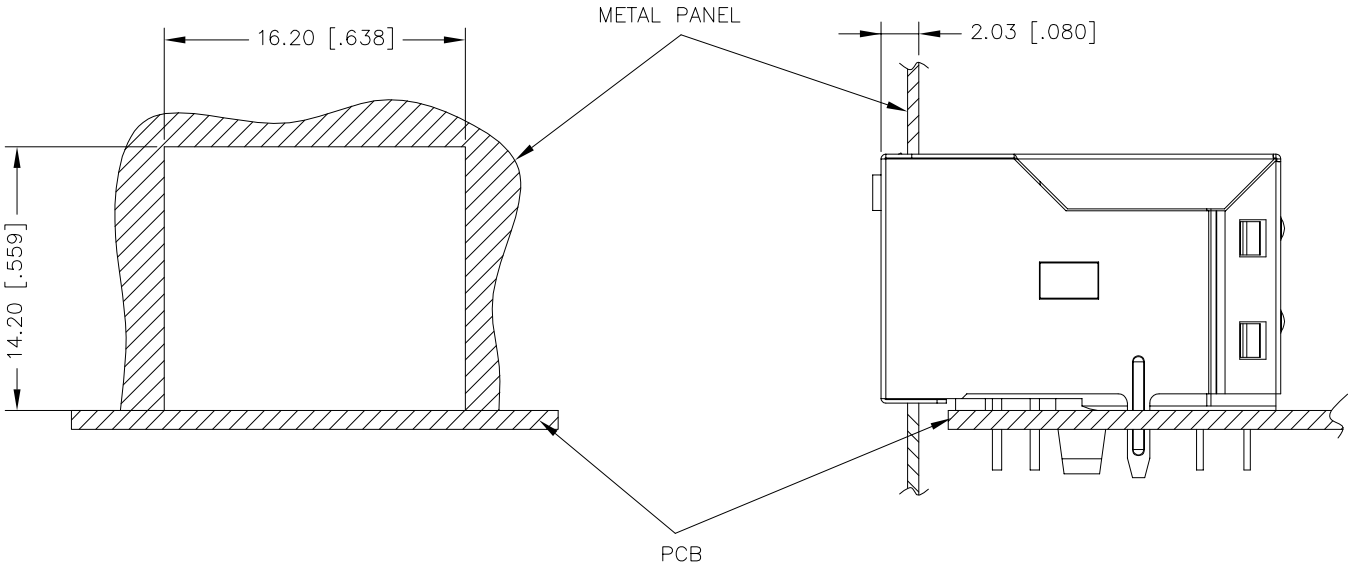

SUGGESTED PANEL CUTOUT

DIMENSIONS ARE IN MILLIMETERS [INCHES] WITH THE FOLLOWING TOLERANCES: [INCHES] ARE FOR REFERENCE ONLY.
X.XX= ±0.10 [±.004]

@ Copyright, 2016. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (01/13/16)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
CONN,RJ45,1X1,100P,1:1,TU	JXD1-0009NL-X1	-	5 OF 5	JXD1-0009NL	A

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Pulse Electronics:

P0585NL PAT6261.003NLT BSPQ000603041N4B00 PA2744NL PA4341.221NLT PA4343.451NLT PD380-4000S1NF PE-67100NL JXD2-0Z10NL PA0369NL PA4320.104NLT AWCS0012070736NJ00 PD617-6000M243 BBUP00201209121Y00 PE-68386NLT PGL6395.121HLT W1902 BSPQ000603043N0B00 JXD0-2015NL PA4320.334NLT PA4343.361NLT ANT1204F007R0870A E5J88-032-02-L PG2290.151HLT W1093 W3078 W3334B0150 BDHE002520122R2MQ1 DPX1608LKF3R2460A PA4341.301NLT