D2684, DECEMBER 1982—REVISED SEPTEMBER 1987

- **Parallel Inputs and Outputs**
- **Four Operating Modes:**
  - **Synchronous Parallel Load**
  - **Right Shift**
  - **Left Shift**
  - **Do Nothing**
- **Positive Edge-Triggered Clocking**
- **Direct Overriding Clear**
- **Package Options: Plastic and Ceramic DIPs, Plastic Small-Outline Packages, and Ceramic Chip Carriers**
- **Dependable Texas Instruments Quality and Reliability**

description

These bidirectional shift registers are designed to incorporate virtually all of the features a system designer may want in a shift register. The circuit features parallel inputs, parallel outputs, right-shift and left-shift inputs, operating-mode-control inputs, and a direct overriding clear line. The register has four distinct modes of operation, namely:

Parallel (broadside) load
Shift right (in the direction Q_A toward Q_D)
Shift left (in the direction Q_D toward Q_A)
Inhibit clocking (do nothing).


Synchronous parallel loading is accomplished by applying the 4 bits of data and taking both mode control inputs, S0 and S1, high. The data are loaded into the associated flip-flops and appear at the outputs after the positive transition of the clock input. During loading, serial data flow is inhibited.

Shift right is accomplished synchronously with the rising edge of the clock pulse when S0 is high and S1 is low. Serial data for this mode is entered at the shift-right data input. When S0 is low and S1 is high, data shifts left synchronously, and new data is entered at the shift-left serial input.


Clocking of the shift register is inhibited when both mode control inputs are low.

The SN54HC194 is characterized for operation over the full military temperature range of −55°C to 125°C. The SN74HC194 is characterized for operation from −40°C to 85°C.

SN54HC194 . . . J PACKAGE
SN74HC194 . . . DW or N PACKAGE
(TOP VIEW)




SN54HC194 . . . FK PACKAGE
(TOP VIEW)



NC – No internal connection

logic symbol†

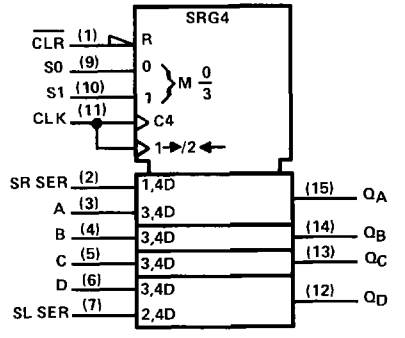


† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.
Pin numbers shown are for DW, J, and N packages.

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 1982, Texas Instruments Incorporated

logic diagram (positive logic)

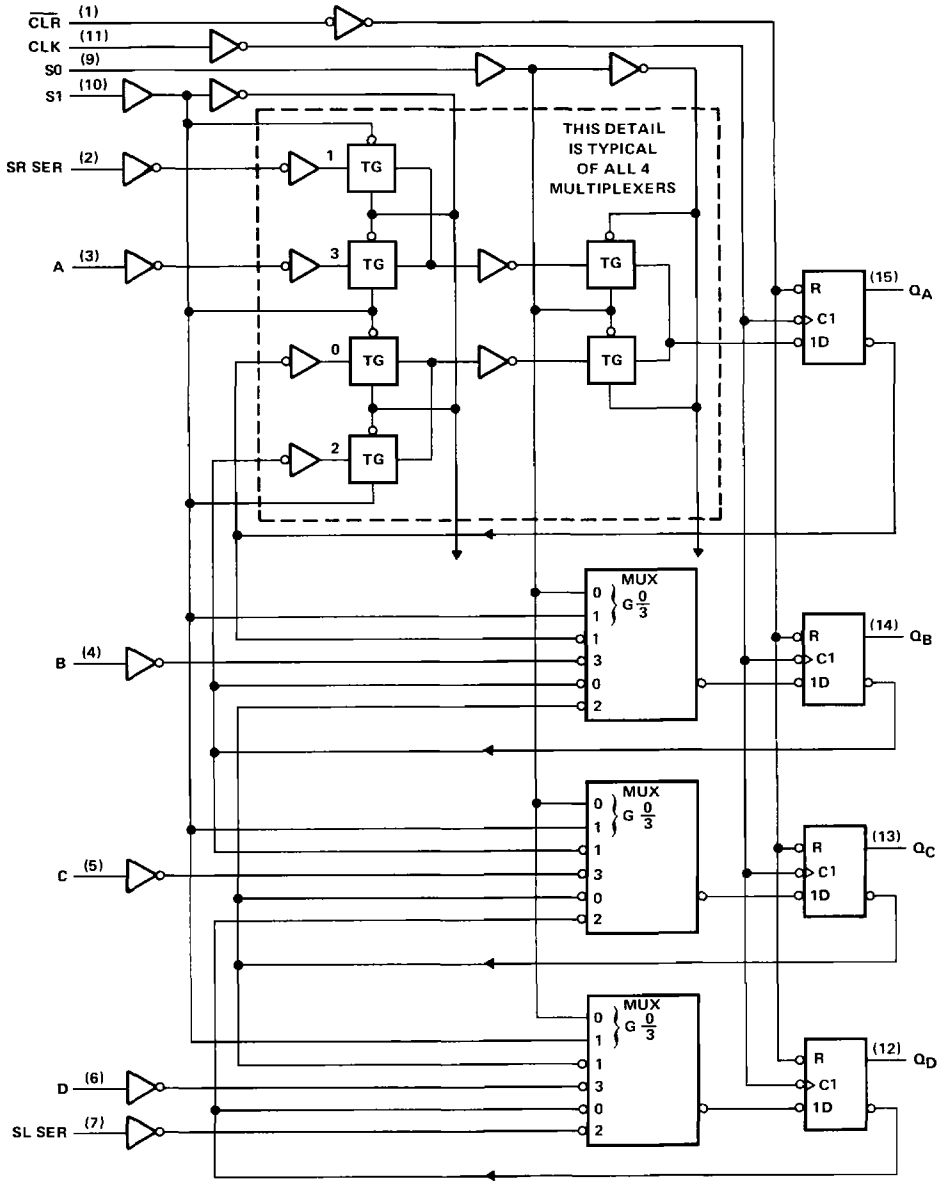


Pin numbers shown are for DW, J, and N packages.

FUNCTION TABLE

INPUTS										OUTPUTS			
CLEAR	MODE		CLOCK	SERIAL		PARALLEL				Q_A	Q_B	Q_C	Q_D
	S1	S0		LEFT	RIGHT	A	B	C	D				
L	X	X	X	X	X	X	X	X	L	L	L	L	L
H	X	X	L	X	X	X	X	X	X	Q_{A0}	Q_{B0}	Q_{C0}	Q_{D0}
H	H	H	↑	X	X	a	b	c	d	a	b	c	d
H	L	H	↑	X	H	X	X	X	X	H	Q_{An}	Q_{Bn}	Q_{Cn}
H	L	H	↑	X	L	X	X	X	X	L	Q_{An}	Q_{Bn}	Q_{Cn}
H	H	L	↑	H	X	X	X	X	X	Q_{Bn}	Q_{Cn}	Q_{Dn}	H
H	H	L	↑	L	X	X	X	X	X	Q_{Bn}	Q_{Cn}	Q_{Dn}	L
H	L	L	X	X	X	X	X	X	X	Q_{An}	Q_{Bn}	Q_{Cn}	Q_{D0}

typical clear, load, right-shift, left-shift, inhibit, and clear sequences

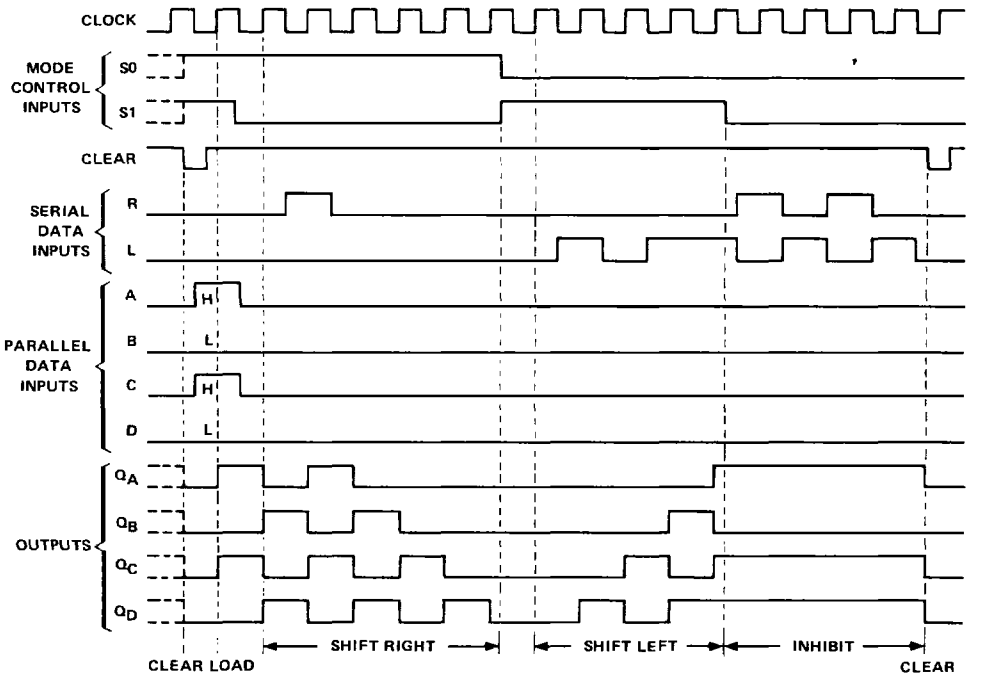

absolute maximum ratings over operating free-air temperature range†

Supply voltage, V_{CC} . . . . . −0.5 V to 7 V
Input clamp current, I_{IK} ($V_I < 0$ or $V_I > V_{CC}$) . . . . . ±20 mA
Output clamp current, I_{OK} ($V_O < 0$ or $V_O > V_{CC}$ . . . . . ±20 mA
Continuous output current, I_O (V_O = 0 to V_{CC}) . . . . . ±25 mA
Continuous current through V_{CC} or GND pins . . . . . ±50 mA
Lead temperature 1,6 mm (1/16 in) from case for 60 s: FK or J package . . . . . 300°C
Lead temperature 1,6 mm (1/16 in) from case for 10 s: DW or N package . . . . . 260°C
Storage temperature range . . . . . −65°C to 150°C

† Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

recommended operating conditions

		SN54HC194			SN74HC194			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
V_{CC} Supply voltage		2	5	6	2	5	6	V
V_{IH} High-level input voltage	V_{CC} = 2 V	1.5			1.5			V
	V_{CC} = 4.5 V	3.15			3.15			
	V_{CC} = 6 V	4.2			4.2			
V_{IL} Low-level input voltage	V_{CC} = 2 V	0		0.3	0		0.3	V
	V_{CC} = 4.5 V	0		0.9	0		0.9	
	V_{CC} = 6 V	0		1.2	0		1.2	
V_I Input voltage		0		V_{CC}	0		V_{CC}	V
V_O Output voltage		0		V_{CC}	0		V_{CC}	V
t_t Input transition (rise and fall) times	V_{CC} = 2 V	0		1000	0		1000	ns
	V_{CC} = 4.5 V	0		500	0		500	
	V_{CC} = 6 V	0		400	0		400	
T_A *Operating free-air temperature*		−55		125	−40		85	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	V_{CC}	T_A = 25°C			SN54HC194		SN74HC194		UNIT
			MIN	TYP	MAX	MIN	MAX	MIN	MAX	
V_{OH}	V_I = V_{IH} or V_{IL}, I_{OH} = −20 μA	2 V	1.9	1.998		1.9		1.9		V
		4.5 V	4.4	4.499		4.4		4.4		
		6 V	5.9	5.999		5.9		5.9		
	V_I = V_{IH} or V_{IL}, I_{OH} = −4 mA	4.5 V	3.98	4.30		3.7		3.84		
	V_I = V_{IH} or V_{IL}, I_{OH} = −5.2 mA	6 V	5.48	5.80		5.2		5.34		
V_{OL}	V_I = V_{IH} or V_{IL}, I_{OL} = 20 μA	2 V		0.002	0.1		0.1		0.1	V
		4.5 V		0.001	0.1		0.1		0.1	
		6 V		0.001	0.1		0.1		0.1	
	V_I = V_{IH} or V_{IL}, I_{OL} = 4 mA	4.5 V		0.17	0.26		0.4		0.33	
	V_I = V_{IH} or V_{IL}, I_{OL} = 5.2 mA	6 V		0.15	0.26		0.4		0.33	
I_I	V_I = V_{CC} or 0	6 V		±0.1	±100		±1000		±1000	nA
I_{CC}	V_I = V_{CC} or 0, I_O = 0	6 V			8		160		80	μA
C_i		2 to 6 V		3	10		10		10	pF

TEXAS INSTRUMENTS
POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

timing requirements over recommended operating free-air temperature range (unless otherwise noted)

		V_{CC}	T_A = 25°C		SN54HC194		SN74HC194		UNIT
			MIN	MAX	MIN	MAX	MIN	MAX	
f_{clock} Clock frequency		2 V	0	6	0	4.2	0	5	MHz
		4.5 V	0	31	0	21	0	25	
		6 V	0	36	0	25	0	29	
t_w Pulse duration	CLK high or low	2 V	80		120		100		ns
		4.5 V	16		24		20		
		6 V	14		20		17		
	$\overline{CLR}$ low	2 V	80		120		100		
		4.5 V	16		24		20		
		6 V	14		20		17		
t_{su} Setup time, any input before CLK↑		2 V	100		150		125		ns
		4.5 V	20		30		25		
		6 V	17		26		21		
t_h Hold time, data after CLK↑		2 V	0		0		0		ns
		4.5 V	0		0		0		
		6 V	0		0		0		

switching characteristics over recommended operating free-air temperature range (unless otherwise noted), C_L = 50 pF (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V_{CC}	T_A = 25°C			SN54HC194		SN74HC194		UNIT
				MIN	TYP	MAX	MIN	MAX	MIN	MAX	
f_{max}			2 V	6			4.2		5		MHz
			4.5 V	31			21		25		
			6 V	36			25		29		
t_{PHL}	$\overline{CLR}$	Any	2 V		67	150		225		190	ns
			4.5 V		17	30		45		38	
			6 V		14	26		37		31	
t_{pd}	CLK	Any	2 V		67	145		220		180	ns
			4.5 V		17	29		44		36	
			6 V		14	25		37		31	
t_t		Any	2 V		28	75		110		95	ns
			4.5 V		8	15		22		19	
			6 V		6	13		19		16	

C_{pd}	Power dissipation capacitance	No load, T_A = 25°C	65 pF typ

NOTE 1: Load circuit and voltage waveforms are shown in Section 1.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Texas Instruments:

TPS25200DRVR DRV8821DCA LM311PW LM4050CEM3-5.0 RI-I02-114B-01 SN74ALVC244PWE4 UCC3752D SN74ALS1640AN SN74ALS257AD SN74ALS258ADR LM5110-2M/NOPB SN74AS832BDW TL750L12CP MSP430F5438AIPZR SN74ACT3631-15PQ TLV2451IDBVR TPS2835PWPR TPS3809I50DBVR INA228AIDGSR ISO124U/1K OPA2330AIDRBT TL074IDR TPS3307-25DGNR OPA643P TVP5150AM1PBSR BQ25616RTWR SN74ACT7807-20FN SN74AS1034ANSR THMC50DBQR TPA005D14DCA