CWDM3011N

SURFACE MOUNT SILICON N-CHANNEL ENHANCEMENT-MODE MOSFET



SOIC-8 CASE

www.centralsemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CWDM3011N is a high current silicon N-Channel enhancement-mode MOSFET designed for high speed pulsed amplifier and driver applications. This energy efficient MOSFET offers beneficially low $r_{DS(ON)}$, low gate charge, and low threshold voltage.

MARKING CODE: C3011N

APPLICATIONS:

- Load/Power switches
- DC-DC converter circuits
- Power management

FEATURES:

- Low $r_{DS(ON)}$
- High current
- Low gate charge

MAXIMUM RATINGS: (T_A=25°C)	**SYMBOL**		**UNITS**
Drain-Source Voltage	V_{DS}	30	V
Gate-Source Voltage	V_{GS}	20	V
Continuous Drain Current (Steady State)	I_D	11	A
Maximum Pulsed Drain Current, tp=10μs	I_{DM}	50	A
Power Dissipation	P_D	2.5	W
Operating and Storage Junction Temperature	T_J, T_{stg}	-55 to +150	°C
Thermal Resistance	Θ_{JA}	50	°C/W

ELECTRICAL CHARACTERISTICS: (T_A=25°C unless otherwise noted)


SYMBOL	**TEST CONDITIONS**	**MIN**	**TYP**	**MAX**	**UNITS**
I_{GSSF}, I_{GSSR}	V_{GS}=20V, V_{DS}=0			100	nA
I_{DSS}	V_{DS}=30V, V_{GS}=0			1.0	μA
BV_{DSS}	V_{GS}=0, I_D=250μA	30			V
$V_{GS(th)}$	V_{GS}=V_{DS}, I_D=250μA	1.0	1.8	3.0	V
V_{SD}	V_{GS}=0, I_S=2.6A			1.2	V
$r_{DS(ON)}$	V_{GS}=10V, I_D=11A		14	20	mΩ
$r_{DS(ON)}$	V_{GS}=4.5V, I_D=9.0A		18	30	mΩ
C_{rss}	V_{DS}=15V, V_{GS}=0, f=1.0MHz		100		pF
C_{iss}	V_{DS}=15V, V_{GS}=0, f=1.0MHz		860		pF
C_{oss}	V_{DS}=15V, V_{GS}=0, f=1.0MHz		120		pF
$Q_{g(tot)}$	V_{DD}=15V, V_{GS}=5.0V, I_D=10A		6.3		nC
Q_{gs}	V_{DD}=15V, V_{GS}=5.0V, I_D=10A		2.0		nC
Q_{gd}	V_{DD}=15V, V_{GS}=5.0V, I_D=10A		2.3		nC
t_{on}	V_{DD}=15V, V_{GS}=10V, I_D=10A		20		ns
t_{off}	R_G=0.3Ω		43		ns

R2 (10-August 2018)

CWDM3011N

SURFACE MOUNT SILICON N-CHANNEL ENHANCEMENT-MODE MOSFET


SOIC-8 CASE - MECHANICAL OUTLINE

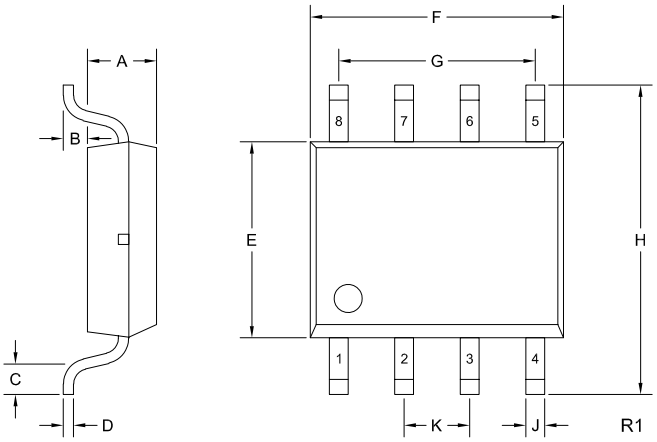

DIMENSIONS				
	INCHES		MILLIMETERS	
SYMBOL	MIN	MAX	MIN	MAX
A	0.055	0.061	1.392	1.554
B	0.004	0.009	0.100	0.224
C	0.016	0.035	0.40	0.90
D	0.007	0.010	0.19	0.25
E	0.145	0.157	3.80	4.00
F	0.189	0.198	4.80	5.00
G	0.150		3.81	
H	0.228	0.244	5.80	6.20
J	0.013	0.020	0.33	0.51
K	0.050		1.27	

SOIC-8 (REV: R1)

PIN CONFIGURATION




LEAD CODE:

1) Source
2) Source
3) Source
4) Gate
5) Drain
6) Drain
7) Drain
8) Drain

MARKING CODE: C3011N

SUGGESTED MOUNTING PADS

(Dimensions in mm)

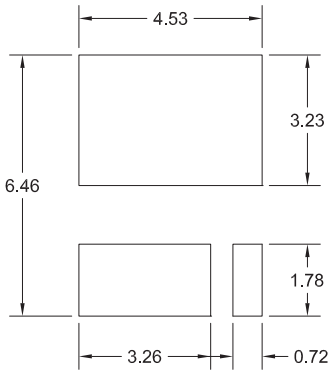

R0


R2 (10-August 2018)

CWDM3011N


SURFACE MOUNT SILICON N-CHANNEL ENHANCEMENT-MODE MOSFET

TYPICAL ELECTRICAL CHARACTERISTICS


Output Characteristics

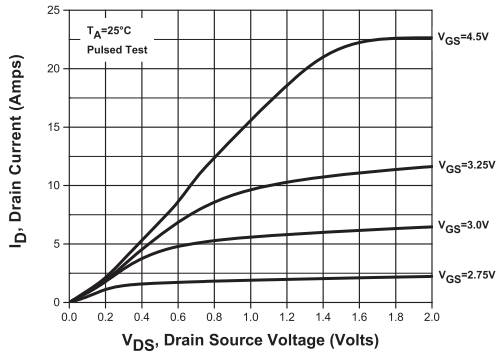


Drain Source On Resistance

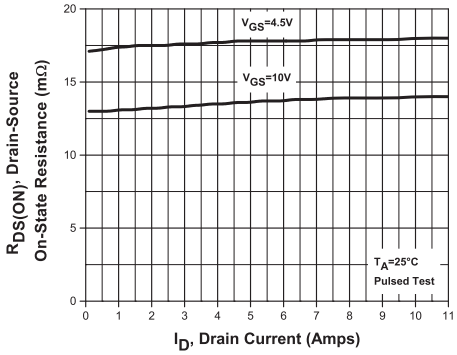


Capacitance

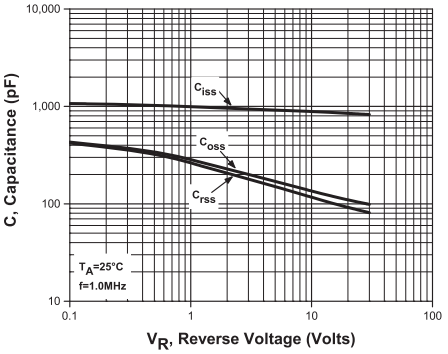

Transfer Characteristics

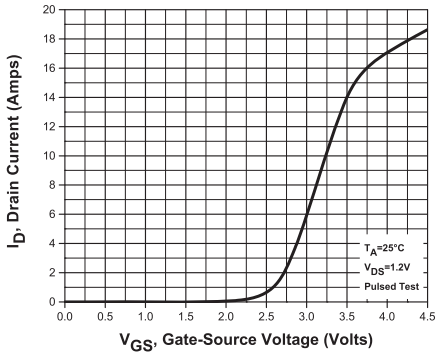

Power Derating

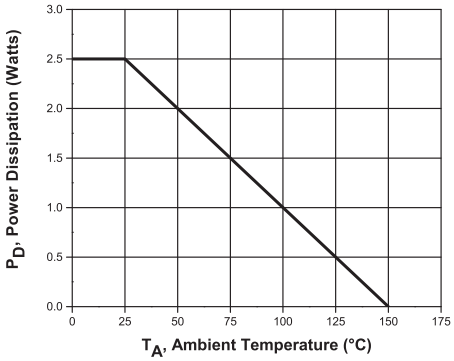

R2 (10-August 2018)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES

PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centralsemi.com

Worldwide Field Representatives:
www.centralsemi.com/wwreps

Worldwide Distributors:
www.centralsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centralsemi.com/terms

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Central Semiconductor:

CMHSH5-4 TR PBFREE CMSSH-3SE TR PBFREE CMHD4448 TR PBFREE CMSH5-150HV TR13 PBFREE
CMZ5342B TR13 PBFREE P6SMB6.8A TR13 PBFREE CMPSH-3 TR PBFREE P6SMB56CA TR13
1.5CE33CA TR PBFREE 2N4299 2N7002 TR13 PBFREE BZX84C10 TR PBFREE
CMDFSHC3-100 TR13 PBFREE CMLSH-4DO TR PBFREE CMPD2838 TR PBFREE
CMPT3904E TR PBFREE CAK3-380C PBFREE CMHZ5252B TR PBFREE CMLT3820G TR PBFREE
1N5254B TR PBFREE CMAD4448 TR PBFREE CMSH2-40M TR13 PBFREE BZX84C12 TR PBFREE
CMHZ5264B TR PBFREE CMR1U-10 TR13 PBFREE CXDM6053N TR PBFREE CMOZ3L0 TR PBFREE
CMPT8599 TR PBFREE CMPTA46 TR PBFREE 1.5CE18CA BK PBFREE