

Kinghelm®

Engineer Drawing


REV	ECN NO.	DESCRIPTION	DATE	APP'D
A/0		RELEASE TO PRODUCTION	01/29/18'	Scrth

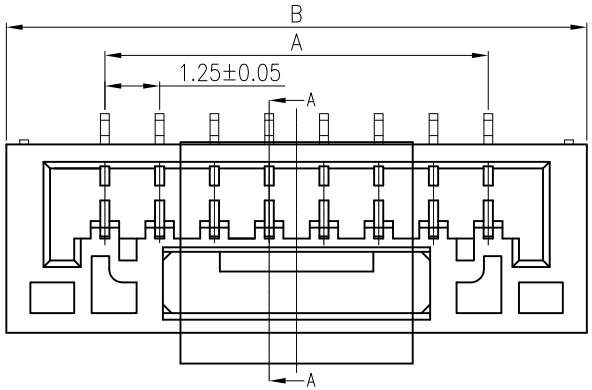


8~15pin





2~7pin

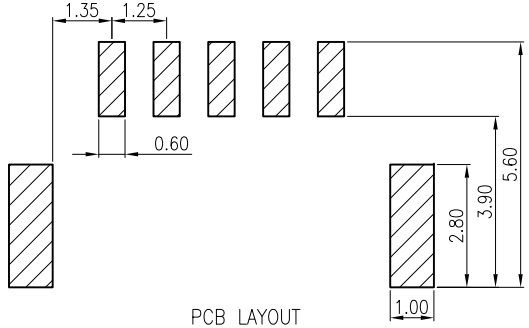


PCB LAYOUT

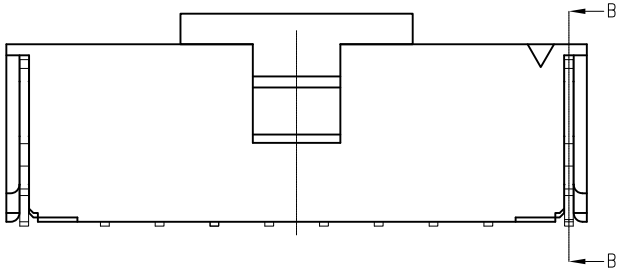


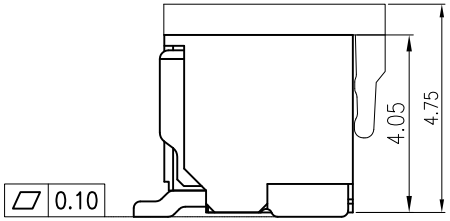



A–A

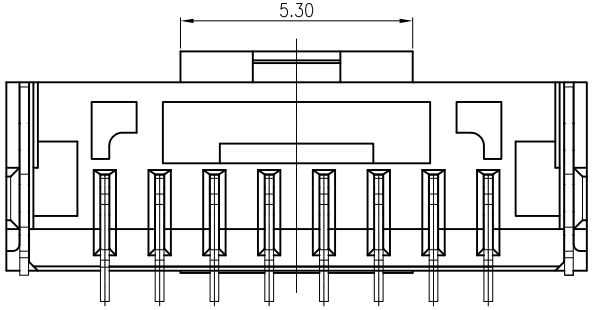



B–B

Poles	A	B
2	1.25	5.75
3	2.50	7.00
4	3.75	8.25
5	5.00	9.50
6	6.25	10.75
7	7.50	12.00
8	8.75	13.25
9	10.00	14.50
10	11.25	15.75
11	12.50	17.00
12	13.75	18.25
13	15.00	19.50
14	16.25	20.75
15	17.50	22.00

NOTES:

1. Material:
   Insulation:Thermal Plastic,UL94V–0(Nature)
   Pin:Phosphor bronze/Tin–Plated
   Tab:Phosphor bronze/Tin–Plated
2. Current Rating: 1A AC,DC
3. Voltage Rating: 100V AC,DC
4. Temperature Rang: –25°C~+85°C
5. Contact Resistance: 30mΩ Max
6. Insulation Resistance: 100MΩ Min
7. Withstanding Voltage: 500V AC/minute
8. Ordering Code: A1252VS–x–CAP

TOLERANCE	
X.	±0.30
X.X	±0.25
X.XX	±0.20
Angle	±3°

UNLESS OTHERWISE SPECIFIED

APPROVALS	DATE
DRAWN Zhang Xiao Tao	01/29/18'
CHK'D Art Shi	01/29/18'
APP'D Art Shi	01/29/18'

深圳市金航标电子有限公司

www.kinghelm.com.cn

KH-A1252VS-12P-CAP

0755-28190160

PART NO. A1252VS–x–CAP

DRAWING NO. EN–A1252VS–x–CAP

TITLE: WIRE TO BOARD, PLUG, PITCH 1.25mm, CRIMP TYPE, ASSEMBLY

UNITS mm	SCALE 1:1	SIZE: A4	SHEET 1 OF 1	001	REV.A/0

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Kinghelm:

KH-300922-TP KH-DR9S-F8.1-1 KH-FFC-V0.5-32P-150MM KH-1.27PH90-1X20P-L10.5 KH-IPEX-K501-29 KH-2.54PH90-1X15P-L13.8 KH-2.54TXM-CB-H13.5 KH-4.5X4.5X10H-B3J KH-6X6X6H-SMT-FS KH-MCX-K507-W KH-1.27PH90-2X10P-L10.5 KH-FFC-V0.5-8P-150MM KH-4.5X4.5X6.5H-SMT KH-HDMI-0035-PK KH-PCIE5.2H-52P KH-2.54FH-1X15P-H8.5 KH-2PH180-1X14P-L8.7 KH-6X6X9H-STM KH-BM2.54-2P-W KH-HDMI-0024-JBS KH-PH-2P-Z KHA(RG1.13)-TX50-IPEX KH-081-TX100-IPEX4 KH-1.27PH90-1X16P-L10.5 KH-2.54TXM-CB-H13.5-G KH-4.5X4.5X6H-TJ KH-6X6X10H-STM KH-6X6X6H-TJ KH-SMA-K513-11G KH-2.54PH180-1X8P-L11.5