General Description

The LM2940IMPX-xx/NOPB series of adjustable and fixed voltage regulators are designed to provide 1 A output cur rent an d to operate down to 2 .3V input-to-output differential.The input volage can up to +35V maximum. It has very good output short protect function than normal others LDO. And LM2940IMPX-xx/NOPB can output larger current than normal LDO when same application condition.

On-chip trimming adjusts the reference voltage to within 2% accuray. Current limit is also trimmed, minimizing the stress under overload conditions on both the regulator and power source circuitry.

The LM2940IMPX-xx/NOPB devices are pin compatible with other three-terminal SCSI regulators and are offered in the low profile surface mount SOT-223 package.

Feature

- Three Terminal Adjustable or Fixed Voltages* 3.3V or 5.0V
- Output Current of 1A
- Operates Down to 2.3V Dropout
- Line Regulation: 0.2% Max.
- Load Regulation: 0.4% Max.
- SOT-223


Applications

- High Efficiency Linear Regulators
- VGA Notebook
- Battery Chargers
- Battery Powered Instrumentation

PIN Configuration

FIXED VERSION
1- Vin
2- Ground
3- V_{out}

SOT-223 Top View



Part Number	Packing
LM2940IMPX-xx/NOPB	1K/REEL

xx: 33,50.

Absolut Maximum Ratings (Note 1)

Power Dissipation	Internally limited
Input Voltage	37V
Operating Junction Temperature	
Control Section	-15°C to 125°C
Power Transistor	0°C to 150°C
Storage temperature	- 65°C to +150°C

Soldering information	
Lead Temperature (10 sec)	300°C
Thermal Resistance	
SOT-223 package	φ JA= 90°C/W*

* With package soldering to copper area over backside ground plane or internal power plane φJA can vary from 46°C/W to >90°C/W depending on mounting technique and the size of the copper area.

Electrical Characteristics

Electrical Characteristics at I_{OUT} = 0 mA, and T_J = +25°C unless otherwise specified.

Parameter	Device	Conditions	Min	Typ	Max	Units
Output Voltage	I_{OUT} = 5V	0 ≤I_{OUT} ≤1A , 6.5V ≤V_{IN} ≤12V	4.800	5.000	5.200	V
Line Regulation	I_{OUT} = 5V	6.5V≤V_{IN} ≤12V		10	50	%
Load Regulation (Notes 2, 3)	I_{OUT} = 5V	V_{IN}=8V, 0≤I_{OUT} ≤1A		10	100	%
Dropout Voltage (V_{IN} - V_{OUT})	I_{OUT} = 5V	ΔV_{OUT} , ΔV_{REF} = 1%, I_{OUT} = 1A (Note 4)			2.5	V
Current Limit	I_{OUT} = 5V	(V_{IN} - V_{OUT}) = 5V	900	1,000	1,500	mA
Minimum Load Current		(V_{IN} - V_{OUT}) = 12V (Note 5)		5	10	mA
Quiescent Current	I_{OUT} = 5V	V_{IN} ≤12V		10	15	mA
Ripple Rejection		f =120Hz , C_{OUT} = 22µF Tantalum, I_{OUT} = 1A, (V_{IN}-V_{OUT}) = 3V, C_{ADJ} =10µF	60	75		dB
	I_{OUT} = 5V	f =120Hz , C_{OUT} = 22µF Tantalum, I_{OUT} = 1A, V_{IN} = 6V	60	68		dB
Thermal Regulation		T_A = 25°C, 30ms pulse		0.008	0.04	%W
Temperature Stability				**1**		%
Long Term Stability		T_A =125°C, 1000Hrs		0.3	1	%
RMS Output Noise (% of V_{OUT})		T_A=25°C, 10Hz ≤f ≤10kHz		0.003		%
Thermal Resistance Junction-to-Case					15	°C/W

Parameters identified with boldface type apply over the full operating temperature range.

Note 1: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. For guaranteed specifications and test conditions, see the Electrical Characteristics. The guaranteed specifications apply only for the test conditions listed.

Note 2: Line and Load regulation are guaranteed up to the maximum power dissipation of 1.2 W. Power dissipation is determined by the input/output differential and the output current. Guaranteed maximum power dissipation will not be available over the full input/output range.

Note 3: See thermal regulation specifications for changes in output voltage due to heating effects. Line and load regulation are measured at a constant junction temperature by low duty cycle pulse testing. Load regulation is measured at the output lead ~1/8" from the package.

Note 4: Dropout voltage is specified over the full output current range of the device.

Note 5: Minimum load current is defined as the minimum output current required to maintain regulation. When 2.5V≤ (V_{IN} - V_{OUT}) ≤20V the device is guaranteed to regulate if the output current is greater than 10mA.

Application Hints

The LM2940IMPX-xx/NOPB series of adjustable and fixed regulators are easy to use and are protected against short circuit and thermal overloads. Thermal protection circuitry will shut-down the regulator should the junction temperature exceed 165°C at the sense point.Pin compatible with older three terminal adjustable regulators, these devices offer the advantage of a lower dropout voltage, more precise reference toerance and improved reference stability with temperature.

Stability

The circuit design used in the LM2940IMPX-xx/NOPB series requiresthe use of an output capacitor as frequency compensation.The addition of 10µF tantalumor 22-2 0uF aluminum on the output will ensure stability for all operating conditions. When adjustment terminal is by passed witha capacitor to improve ripple rejection, the requirement for output capacitor increase.The value of 22µF tantalum or 100uF aluminum covers all cases of bypassing the adjustment terminal. Without bypassing the adjustment terminal smaller capacitors canbe used ith equally good results.
current paths on the LM2940IMPX-xx/NOPB adjustment pin, therefore even with capacitords on the adjustment pin no protection diode is needed to ensure device safety under short-circui tconditions. Diodes between the input and output are not usually needed Microsecond surge currents of 50A to 100A can be handled by the internal diode between the input and output pins of the device. In normal operations it is difficult to get those values of surge currents even with the use of large output capacitances. If high value output capacitors are used, such as 1000mF to 5000mF and the input pin is instantaneously shorted to ground, To ensure good transient response with heavy load current changes capacitor values on the order of 100mF are used in the output of many regulators. To further improve stability and transient response of the sedevices larger values of output capacitor can be used.

Protection Diodes

Unlike older regulators, the LM2940IMPX-xx/NOPB family does not need any protection diodes between the adjustment pin and the output and from the output to the input to prevent over-stressing the die. Internal resistors are limiting the internal.

Table 1.

Copper Area		Board Area	Thermal Resistance (Junction-To-Ambient)
Top Side*	Back Side		
2500 Sq. mm	2500 Sq. mm	2500 Sq. mm	45°C/W
1000 Sq. mm	2500 Sq. mm	2500 Sq. mm	45°C/W
225 Sq. mm	2500 Sq. mm	2500 Sq. mm	53°C/W
100 Sq. mm	2500 Sq. mm	2500 Sq. mm	59°C/W
1000 Sq. mm	1000 Sq. mm	1000 Sq. mm	52°C/W
1000 Sq. mm	0	1000 Sq. mm	55°C/W


Ripple Rejection

The ripple rejection values are measured with the adjustment pin bypassed. The impedance of the adjust pin capacitor at the ripple frequency should be less than the value of R1 (normally 100Ωto 200Ω) for a proper bypassing and ripple rejection approaching the values shown. The size of the required adjust pin capacitor is a function of the input ripple frequency. If R1=100Ω at 120Hz the adjust pin capacitor should be >13mF. At 10kHz only 0.16mF is needed.

The ripple rejection will be a function of output voltage, in circuits without an adjust pin bypass capacitor. The output ripple will increase directly as a ratio of the output voltage to the reference voltage (V_{OUT} / V_{REF}).

Package Dimensions

Inches (millimeters) unless otherwise noted.

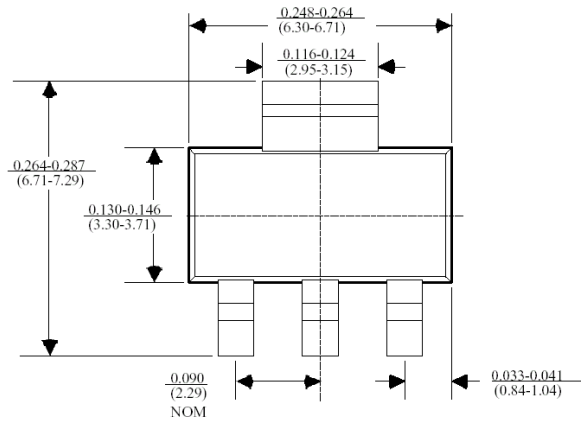

Attention

■ Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.

■ HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.

■ Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

■ HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could
give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.

■ In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.

■ No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.

■ Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

■ Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HXY MOSFET:

AQ15C-01FTG HSEN3611D3 RLSD32A121V LM393DR-HXY PESDSC2FD5VU PJEC5V0M1FN2 TPSMB100CA-VR HLY323BC1524L BV05C-H ESD5L5.0C-HXY PESDLC2FD3V3BH PESDNC2XD5VBL HCEZ36V,L3F HSTS521050B331 PESDNC2XD5VBF 60N06 HESD36VD3B HESDSLC3V3D3B TPSMB28A-VR AZ4007-01H ESD5LM5.0C-HXY HPTVSUC3D5VB HRCLAMP3371ZCTFT HSEN2411D3 PJSD24CW_R1 AZ4836-01L HACPDQC5V0-HF HSD15C.TCT HAZ4007-01H HSG3D15B3.3MA