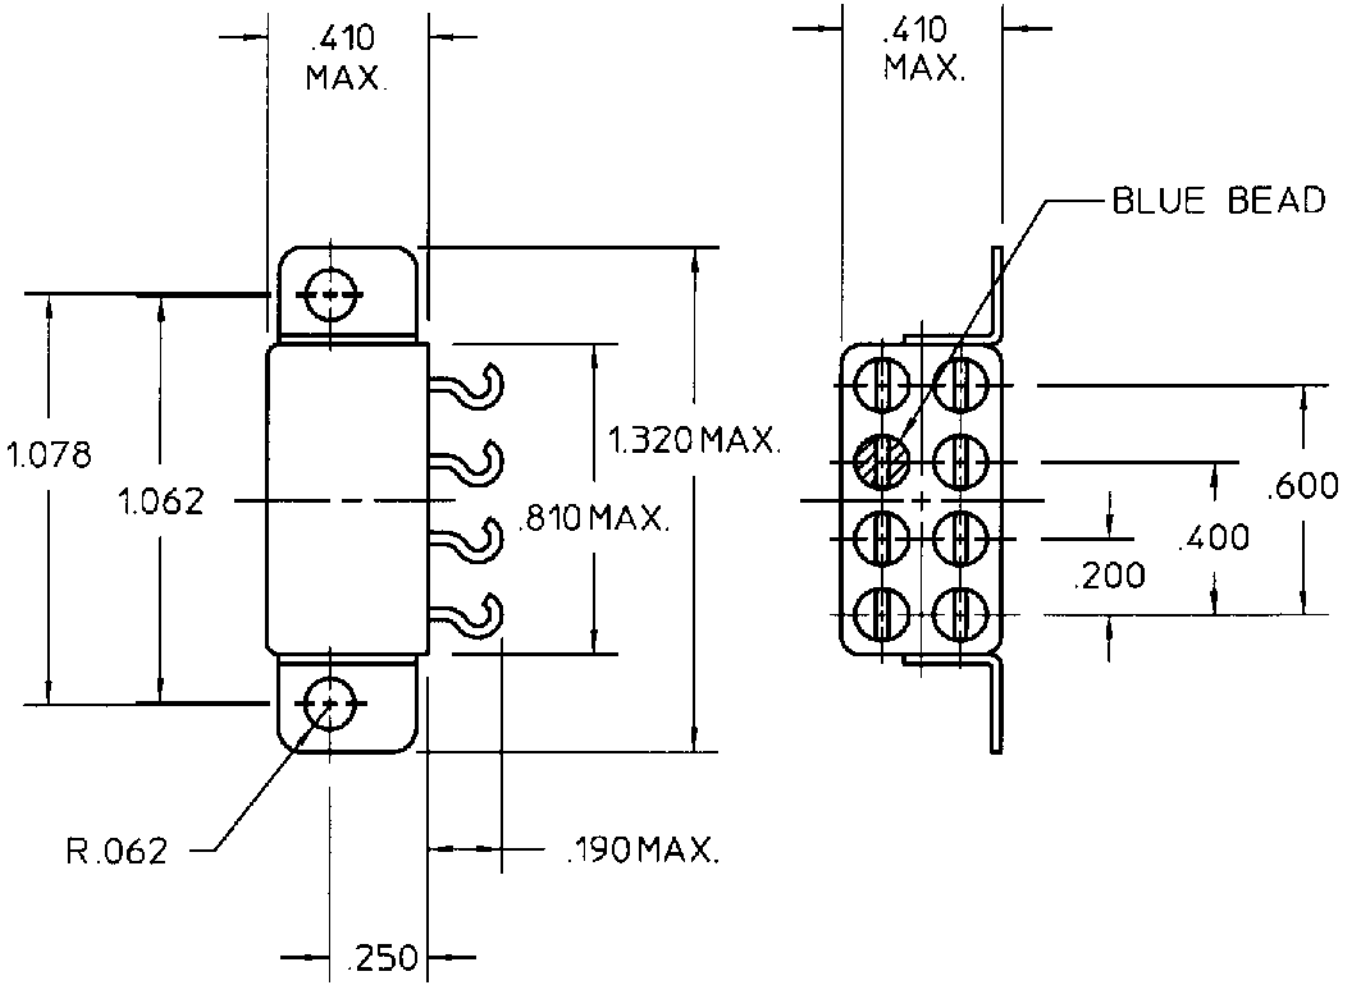


TOLERANCE = ±.010

COIL: @ 25°C

RESISTANCE 310 OHMS ± 10%

NOMINAL VOLTAGE 12.0 VDC

MUST OPERATE 5.6 VDC

MUST RELEASE 3.35 VDC MAX, 0.55 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 2500 CPS @ 20 g's

SHOCK 50 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 6 MS MAX.
RELEASE TIME 5 MS MAX.
CONTACT STABILIZATION 2 MS MAX.

CUSTOMER DATA SHEET

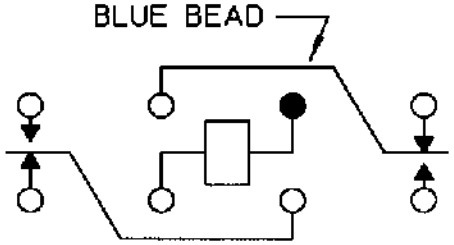

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 11/30/95 | CK. 11/30/95 gjb

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M39016/44-022M

TYPE "HMS" RELAY

HMS1131S03M

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

SBCHE154R7K SBCHE64R7K 2380312-2 2834055-1 1969656-1 2-292161-3 1-962915-1 1393431-1 141991-2 CRGCQ2010J3K3 U5254-000005-030PA 1743455-2 3631B101LL 650075-000 CPF0402B37K4E1 SMW73R0JT RH73H2A40MKTN ROX05SJ18R 1-794222-0 175977-2 2377783-2 3-1393225-0 917696-1 TE50BR39J 2310537-1 2005330-1 3430B2F51RTDF 936348-1 MPT100C18RF 1903112-2