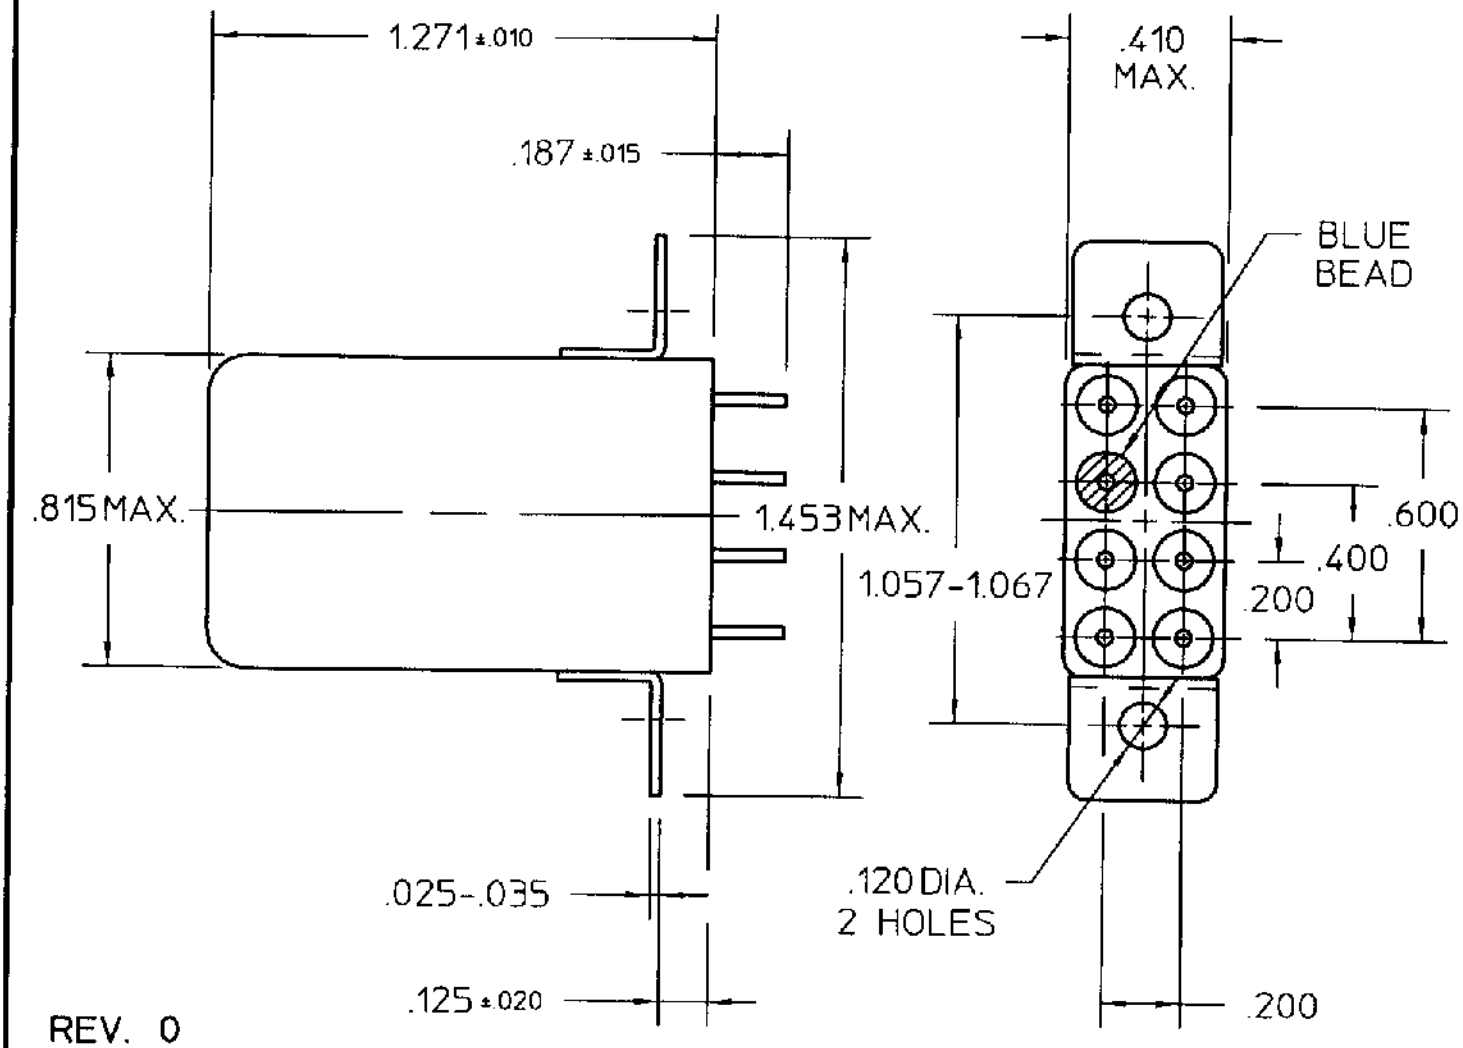


REV. 0
DCO 170339

COIL: @ 25°C

RESISTANCE 5000 OHMS

NOMINAL VOLTAGE 6.0 mADC

MUST OPERATE 2.8 mADC

MUST RELEASE 1.4 mADC MAX, 0.3 mADC MIN

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 15 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 15 MS MAX
RELEASE 10 MS MAX
CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

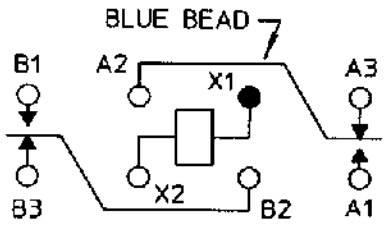

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. PBB 12/6/00 | CK. TLG 12-11-00

CII Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M5757/13-101 REV.

3SAT RELAY

3SAT1318A2

F-719 REV 3

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

175977-2 3631B101LL ROX05SJ18R 1969656-1 2377783-2 2-292161-3 917696-1 936348-1 CPF0402B37K4E1 SBCHE154R7K TE50BR39J SMW73R0JT 1-794222-0 2834055-1 3-1393225-0 650075-000 141991-2 1903112-2 3430B2F51RTDF U5254-000005-030PA CRGCQ2010J3K3 MPT100C18RF 1743455-2 2310537-1 RH73H2A40MKTN SBCHE64R7K 1-962915-1 1393431-1 2005330-1 2380312-2