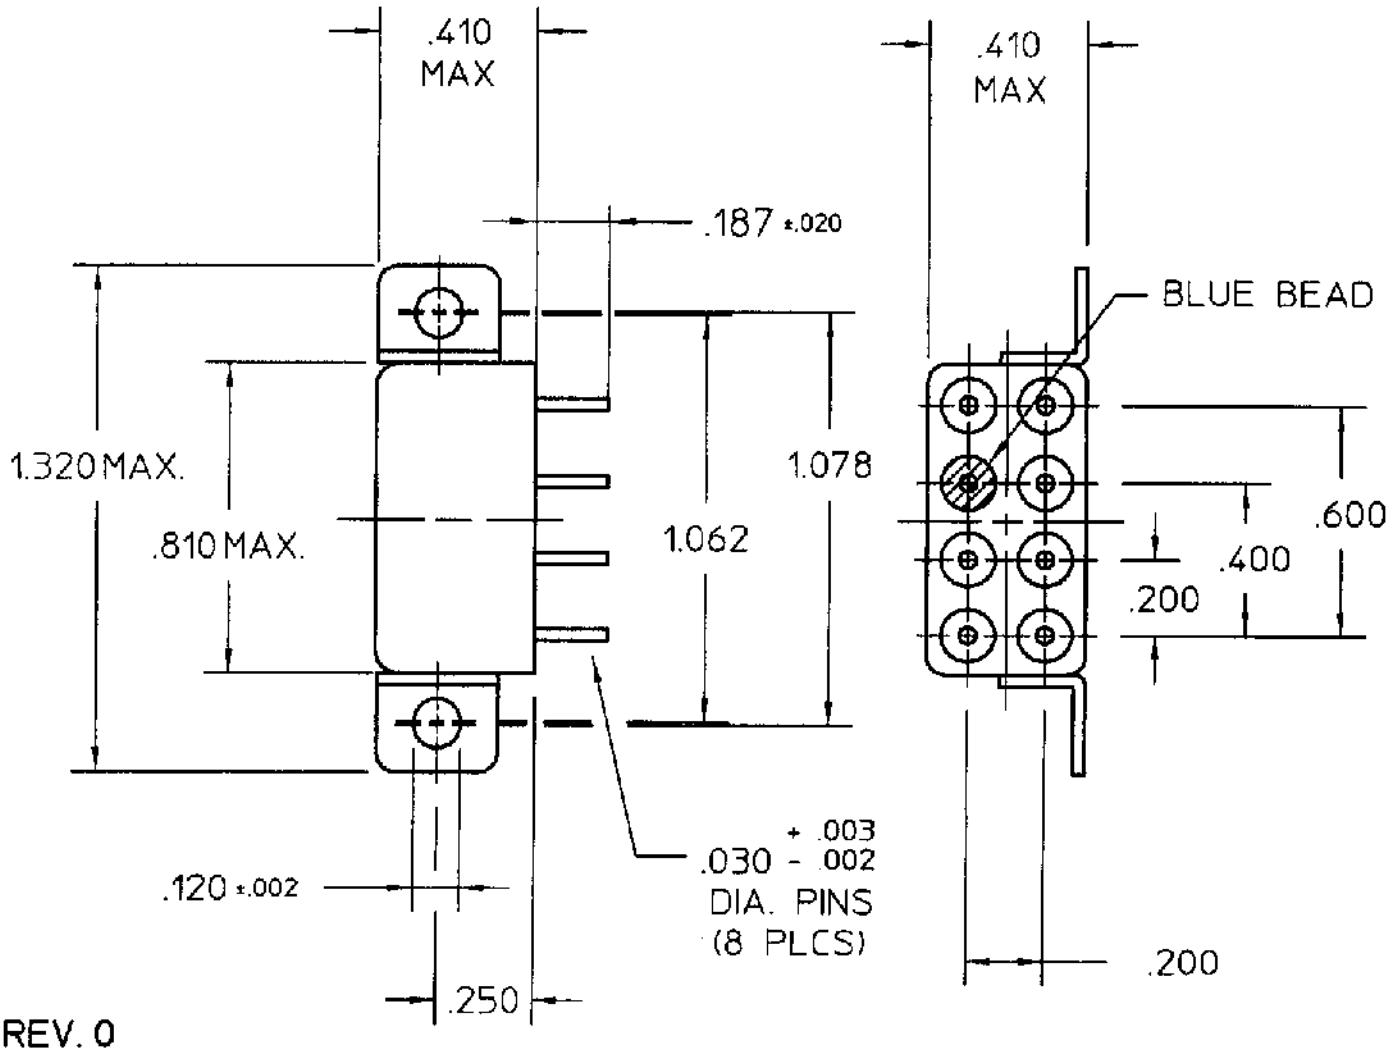


REV. 0

DCO 16677

COIL: @ 25°C

RESISTANCE 1250 OHMS ±10%

NOMINAL VOLTAGE 26.5 - 32 VDC

MUST OPERATE 14.0 VDC

MUST RELEASE 1.5 VDC

ENVIRONMENT:

VIBRATION 20 CPS TO 2000 CPS @ 20 g's


SHOCK 100 g's 6 ±1 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.

CONTACT BOUNCE 2.0 MS MAX.

CUSTOMER DATA SHEET

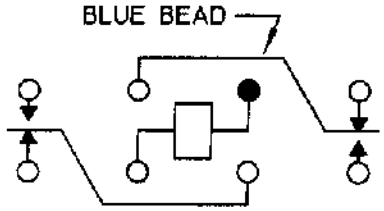

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 4A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. PBB 12/15/00 | CK. TLG 12-15-00

CII Technologies
advanced control electronic solutions

CUST. C.I.I. CATALOG

CUST. NO. _____ REV. _____

"HFW4A" RELAY

HFW4A1231D00

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

175977-2 1903112-2 3631B101LL 2-292161-3 CPF0402B37K4E1 MPT100C18RF 2310537-1 SMW73R0JT
1393431-1 1969656-1 3430B2F51RTDF 650075-000 CRGCQ2010J3K3 TE50BR39J U5254-000005-030PA
2005330-1 936348-1 1-794222-0 1743455-2 2377783-2 2834055-1 1-962915-1 141991-2 2380312-2
3-1393225-0 917696-1 SBCHE64R7K RH73H2A40MKTN ROX05SJ18R SBCHE154R7K