IEC CONNECTORS

PC BOARD AND SCREW MOUNTING

INTRODUCTIONS

1. Designed to meet globally accepted IEC publication 320 Class 1, that allows users to comply with industry standard in power entry requirement.
2. Connector for cold condition, with pin temperature 70°C max.
3. Nickel-plated brass pins for soldering on PC board.

SPECIFICATIONS


1. Rated voltage: 250VAC,10A/15A
2. Minimum insulation resistance at 500VDC: 10M OHM
3. Dielectric strength (one minute): 2000VAC between pins
4. Flammability class: UL 94V-0

DELTA PART NUMBER		SK-1010, SK-1019
RATED CURRENT (AT 250VAC)	UL/CSA	15A
	VDE	10A
CONNECTOR TYPE	MALE	△


MECHANICAL CONSTRUCTION




SK-1010



SK-1019

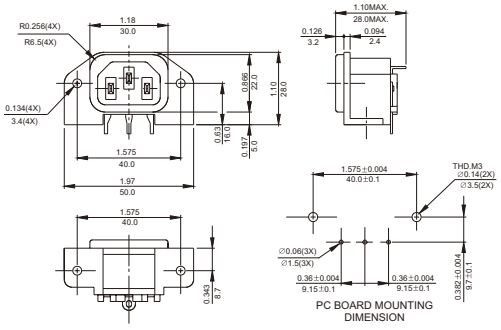

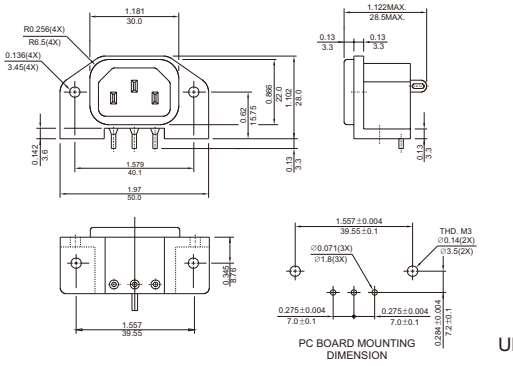

UNIT: INCH / mm

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

DELTA Electronics:

FFB1224SHE PJT-12V40WBAA ASB02505SHA-AY6B 02BEEG3H 03GEEG3E 15GENG3E
ACS3-CNTB0600 M55339/14-00306 06AN2 PMC-24V075W1AA SK-1015-STD AFB0724VH-AF00
DTC1000C FFB0824SHE-F00 PFB1224UHEP0 DSOL-1341-12 FFB0912HHE AFL12AUHE-C
DSOL-0844-24 S24SP05012PDFA 30DPGS5C BFB1248GH-A 06BEEG3G AFB0524HHD
MDS-400APB24AA PL01S4805A PM05S050A PMT-48V75W2BA AFB0624VH-A CTA4100A