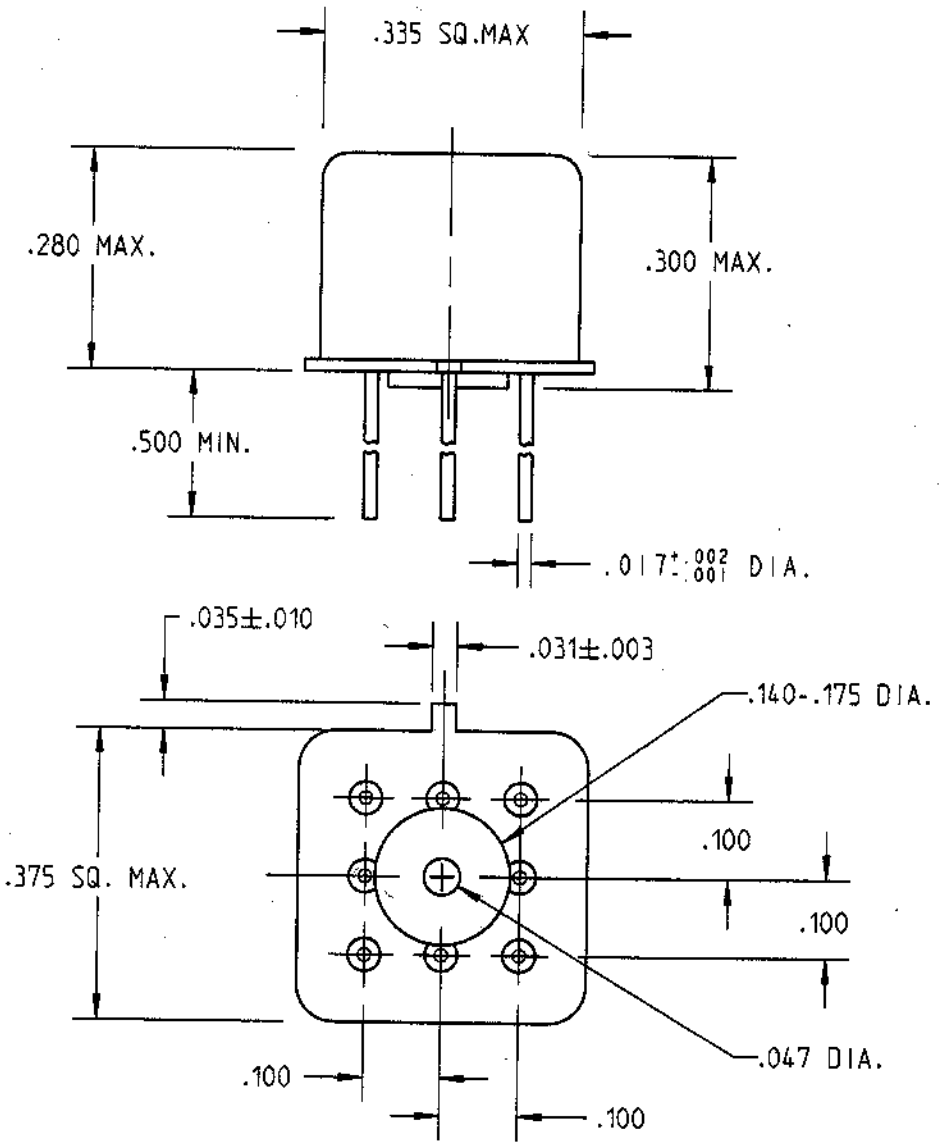


REV. 0
DCO 143764

COIL: @ 25°C


RESISTANCE: 1560 OHMS ±10%
NOMINAL VOLTAGE: 26.5 VDC
MUST OPERATE: 14.2 VDC
MUST RELEASE: 8.0 VDC MAX., 1.37 VDC MIN.

ENVIRONMENT:

VIBRATION 10 Hz TO 3000 Hz @ 30 g's
SHOCK 75 g's 6 MS. DURATION
TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX.
RELEASE TIME 1.5 MS MAX.
CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1 AMP
28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 11JUL03 CK 7/14/03

CII Technologies™
advanced control electronic solutions

CUST. QPL
CUST. NO. M39016/17-042M REV.

"JMGA" RELAY

JMGAC-26MW

F-718 REV. 4

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

JMGAC-26MW