


REV	MODIFICATION	DATE




NOTES:
SPECIFICATION:


1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: −30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

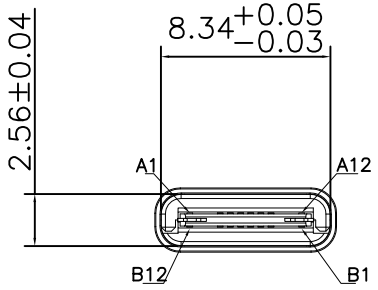

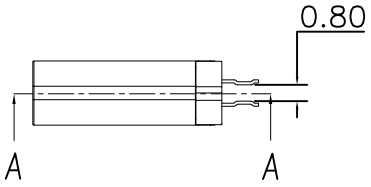

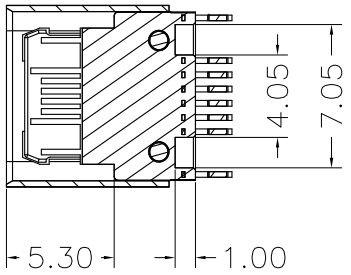

A−A

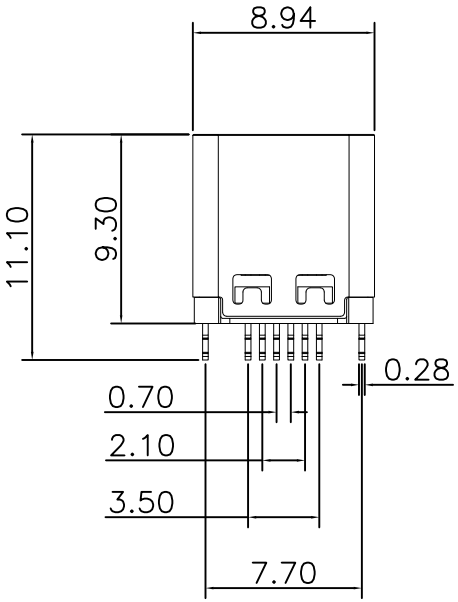

PIN	Signal Name	PIN	Signal Name
A1	GND	B12	GND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SUB2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SUB1	B5	CC2
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	GND	B1	GND

产品图
PRODUCT CHART DWG

公差一览表
TOLERANCE UNLESS OTHERMSE

X.	±0.25	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	918-418K2022E40005
比例 SCALE	1:1	审核 CHKD	郭志富	产品名称 PRODUCT NO.	TYPE-C3.1母座无边夹板间距0.8 长度9.3LCP黑胶 16PIN
日期 DATE	2018.06.20	核准 APPD	黄国荣	角法 VIEW	版本 REV A0

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

911-221A2021S10100 920-A62A2021S10108 920-F52A2021S10105 906-262A1021D10200
907-111A1022D10200 910-151A2021D10100 912-312A1012D10100 918-318K2023C40005
920-C52A2021S10105 920-C62A2021S10103 920-154A2021Y10110 920-A64A2091S101A3
904-232A2031S10100 904-232B2032S10100 906-552A1012D10200 907-312A1101Y10210
916-151A1022Y10200 905-761A2032S10200 920-A62A2021S10104 912-112A2021S10100
917-B88C201AH70201 917-P81A202ES60201 918-418K2022Y40011 919-162A1012D10400
918-468K2029Y50000 904-331B2032S10200 906-752B1114D10200 918-415K3028S40000
912-112A1011D10100 908-351A1011D10100