
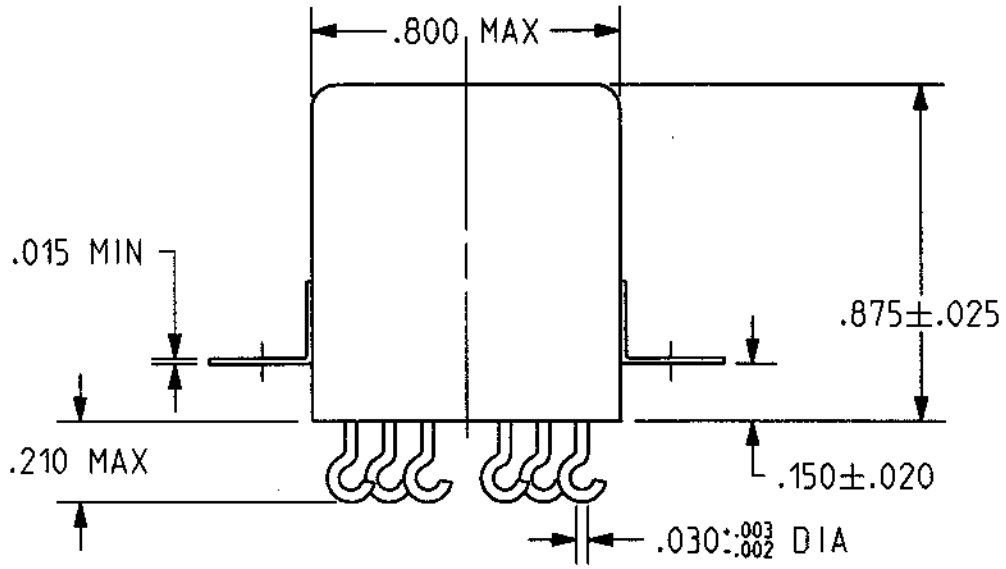


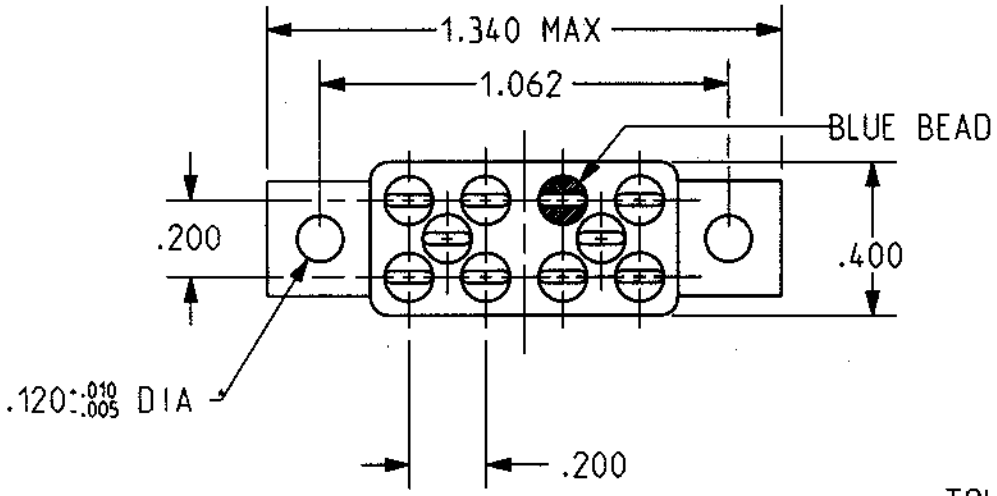

REV. 0
DCO 64253

TOL. = ±.010

COIL: @ 25°C

SET	RESET
300 OHMS ±10%	300 OHMS ±10%
12 VDC NOMINAL VOLTAGE	12 VDC NOMINAL VOLTAGE
5.8 VDC MUST OPERATE	5.8 VDC MUST OPERATE

ENVIRONMENT:


VIBRATION 10 Hz 3000 Hz 30 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: SET AND RESET TIME 5 MS MAX.
CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET

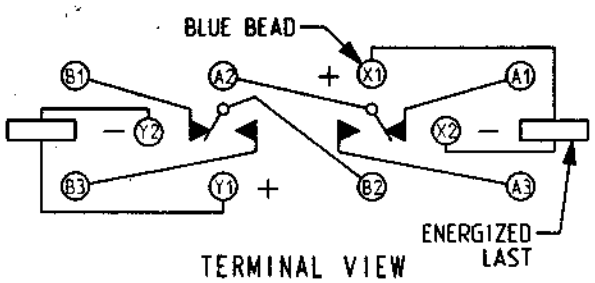

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. ASB 7 AUG 02 CK. 8/7/02

CII Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M39016/32-009

TYPE "3SAM" RELAY

3SAM1827A2

F-719 REV 4

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1743455-2 ROX05SJ18R TE50BR39J 1969656-1 2005330-1 2377783-2 936348-1 CRGCQ2010J3K3 U5254-000005-030PA 1393431-1 3-1393225-0 3430B2F51RTDF 650075-000 917696-1 141991-2 175977-2 2380312-2 MPT100C18RF SBCHE154R7K 1-794222-0 1903112-2 RH73H2A40MKTN SMW73R0JT 2834055-1 2-292161-3 CPF0402B37K4E1 1-962915-1 2310537-1 3631B101LL SBCHE64R7K