


ROHS

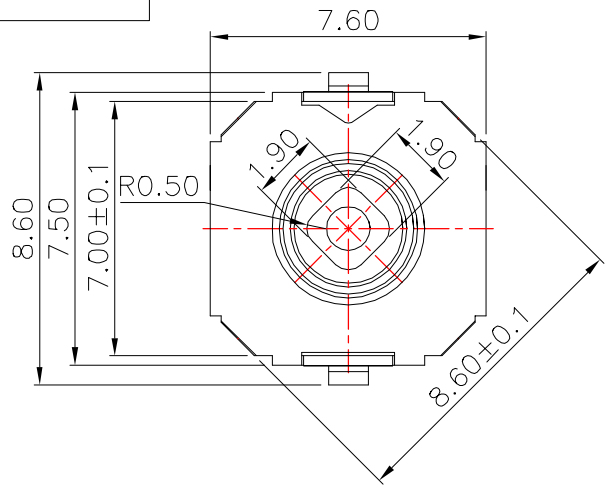


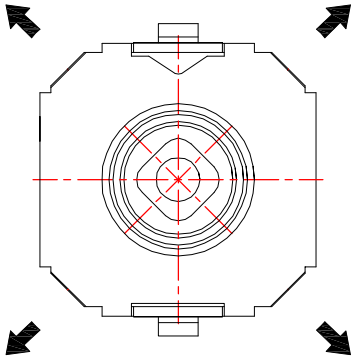


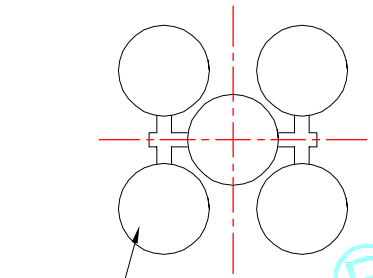


Terminal / Direction	①	②	③	④	⑤	⑥
↓		●			●	
↖	●				●	
↗				●	●	
↙			●		●	
↘					●	●

Circuit Diagram

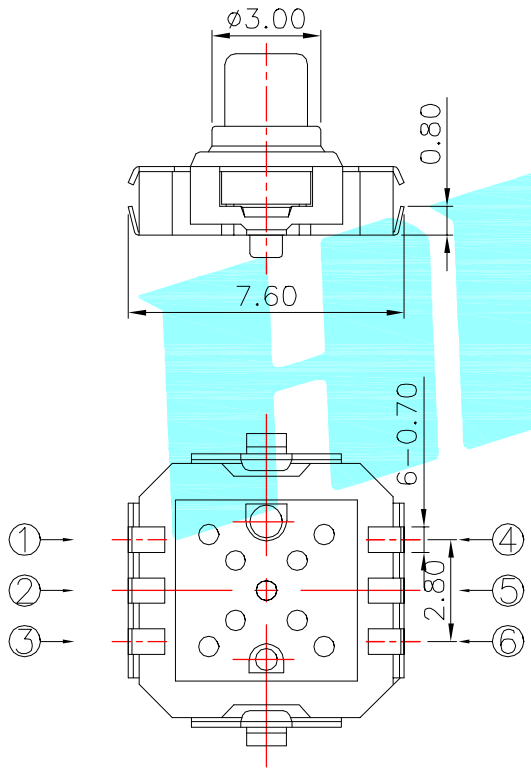

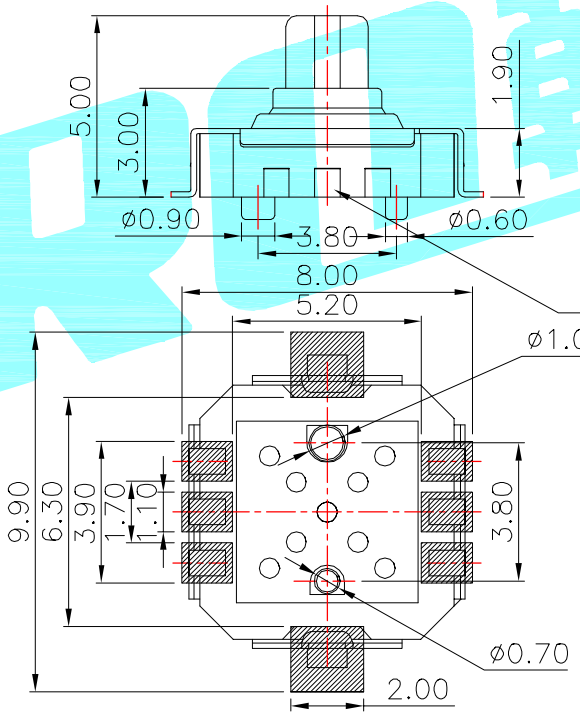

PCB Layout(Pattern Side)

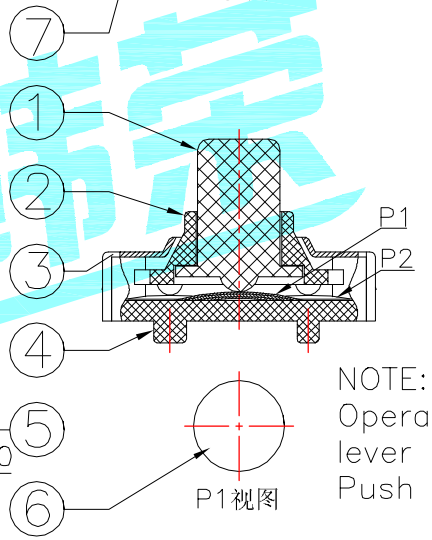

NOTE:
Operating Force:
lever portion 160 ± 35 gf
Push portion 250 ± 35 gf

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑦	Contact 2	——	2	F.Ag/SUS	——	——
⑥	Contact 1	——	1	F.Ag/SUS	——	——
⑤	Terminal	——	6	Brass(0.15t)	Plating silver	——
④	Base	——	1	LCP	Black	
③	Cover	——	1	SUS	——	——
②	Axle sleeve	——	1	LCP	Black	——
①	Keystoke	——	1	PA46	Black	——

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——

APPROVALS		DATE	HRO精荣® ELECTRONICS CO.,LTD
DRAWN	J.X.Zhang	2013/7/23	
CHECKED			TITLE: MULTIFUNCTIONAL SWITCHS
APPROVALS			PART NO. K1-5202UA-03

TOLERANCES ARE			ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
	30~以下	±0.30				
	10~30	±0.20				
	5~10	±0.15	±2°	DRAWING NO. ——		SHEET 1 OF 1
	~ 5	±0.10				

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HRO:

U-C-M5SS-Y-1 U-F-M5DD-Y-L1 K2-1101DF-A4DW-01 K2-1102DP-S3SW-04 U-M-M5DD-W-2 DC-031A-10A K2-1102BG-I4CW-01 K2-1102DP-G4SW-04 K3-1346S-F1 U-F-M5SS-W-5 ES-07KP K2-1102AT-A4CW-01 K2-1102SP-K4SC-04 U-F-M5DD-W-L K2-1102SP-A5SC-04 K8-5851D-L1 U-F-M5DD-Y-L DQ-03BP K3-2258S-E1 PJ-399B-6A TYPE-C-31-M-04 DS-01BP SIM-08A U-C-M5DW-W-1 U-F-M5DS-Y-1 DA-10RP K2-1818DP-A3SW-01 K5-1617SA-01 PJ-3250-5A SS-22D03-G4