WAGO online catalog / eShop

2-conductor terminal strip; with push-buttons on both sides; with fixing flanges; for screw or similar mounting types; Fixing hole 3.2 mm Ø; with 209-123 mounting carrier for DIN 35 rail; 3-pole

Item No.: 261-423/341-000



2-conductor terminal strip; with push-buttons on both sides; with fixing flanges; for screw or similar mounting types; Fixing hole 3.2 mm Ø; with 209-123 mounting carrier for DIN 35 rail; 3-pole

Marking

RoHS ✓
Compliant

Business data

Supplier	*WAGO*
Item no.	*261-423/341-000*
GTIN / EAN	*4044918627351*
Content	*1*
Order amount	*100*
Customer item number	

Notes

Technical data

Miscellaneous

No. of Poles	*3*
Total number of connection points	*6*
Total number of potentials	*3*
Color	*gray*
Pollution degree (1)	*3*
Rated voltage EN (1) [V]	*500 [V]*
Rated surge voltage (1) [kV]	*6 [kV]*
Nominal current [A]	*24 [A]*

Downloaded from Arrow.com.

Technical data

Connection technology (1)	*CAGE CLAMP®*
Cross section from (1) [mm²]	*0.08 [mm²]*
Cross section up to (1) [mm²]	*2.5 [mm²]*
Cross section from (1) [AWG]	*28 [AWG]*
Cross section up to (1) [AWG]	*14 [AWG]*
Stripped length from (1) [mm]	*8 [mm]*
Stripped length up to (1) [mm]	*9 [mm]*
Stripped length (1) [in]	*0.33 [in]*
Type of wiring	*Side-entry wiring*
Design	*horizontal*
Marking level	*Side marking*
Fire load [MJ]	*0.192 [MJ]*
Weight [g]	*9.151 [g]*
Width [mm]	*31.6 [mm]*
Width [in]	*1.244 [in]*
Height [mm]	*23.2 [mm]*
Height [in]	*0.913 [in]*
Length [mm]	*28 [mm]*
Length [in]	*1.102 [in]*

Approbation

Item No.	Registration	Registration no.	Voltage [V]	Current [A]	Cross section [mm², AWG]
261-423/341-000	*CSA*	*18677-45*	*300*	*20*	*26-14*
261-423/341-000	*KR*	*HMB05880-EL002*	*500*	*24*	*2,5*
261-423/341-000	*LR*	*92/20242(E5)*	*400*	*24*	*2,5*
261-423/341-000	*UL*	*E45172*	*300*	*15*	*28-14*

Accessories

Jumper

Item no.	Description	Pack. unit (Sub Pack)
261-402	Comb-style jumper bar; insulated; 2-way; reduces conductor size to 1.5 mm²	25

Downloaded from Arrow.com.

Accessories

Marking accessories

Item no.	Description	Pack. unit (Sub Pack)
2009-145	Mini-WSB Inline; plain; 1,700 Mini-WSB markers (5 mm) on roll; stretchable 5 - 5.2 mm	1
248-501	Miniature WSB quick marking system; plain; Marker width 5 mm; 10 strips with 10 markers per card	5
248-501/000-002	Miniature WSB quick marking system; plain; Marker width 5 mm; 10 strips with 10 markers per card	5
248-501/000-005	Miniature WSB quick marking system; plain; Marker width 5 mm; 10 strips with 10 markers per card	5
248-501/000-006	Miniature WSB quick marking system; plain; Marker width 5 mm; 10 strips with 10 markers per card	5
248-501/000-007	Miniature WSB quick marking system; plain; Marker width 5 mm; 10 strips with 10 markers per card	5
248-501/000-012	Miniature WSB quick marking system; plain; Marker width 5 mm; 10 strips with 10 markers per card	5
248-501/000-017	Miniature WSB quick marking system; plain; Marker width 5 mm; 10 strips with 10 markers per card	5
248-501/000-023	Miniature WSB quick marking system; plain; Marker width 5 mm; 10 strips with 10 markers per card	5
248-501/000-024	Miniature WSB quick marking system; plain; Marker width 5 mm; 10 strips with 10 markers per card	5

Downloaded from Arrow.com.


Accessories


General accessory

Item no.	Description	Pack. unit (Sub Pack)
209-132	Operating tool; for connecting comb-style jumper bar; 2-way; of insulating material	1
210-136	Test plug; 2 mm Ø; with 500 mm cable	1
210-188/001-000	Stickers for operating instructions; for side-entry terminal strips; 260 to 262 Series	100
210-657	Operating tool with partially insulated shaft; blade (3.5 x 0.5) mm; short; suitable for 260, 261, 262, 264, 270, 280, 281, 869, 870 and 880 Series	1
210-720	Operating tool with partially insulated shaft; Type 2, blade (3.5 x 0.5) mm; suitable for 260, 261, 262, 264, 270, 280, 281, 290, 775, 776, 777, 769, 780, 781, 869, 870, 880, 2002, 2003, 2004, 2005 and 2022 Series	1
216-101	Ferrule; sleeve for 0.5 mm² / awg 22; uninsulated; electro-tin plated	1,000
216-102	Ferrule; sleeve for 0.75 mm² / awg 20; uninsulated; electro-tin plated	1,000
216-103	Ferrule; sleeve for 1 mm² / awg 18; uninsulated; electro-tin plated	1,000
216-104	Ferrule; sleeve for 1.5 mm² / awg 16; uninsulated; electro-tin plated	1,000
216-201	Ferrule; sleeve for 0.5 mm² / awg 22; insulated; electro-tin plated	1,000
216-202	Ferrule; sleeve for 0.75 mm² / awg 20; insulated; electro-tin plated	1,000
216-203	Ferrule; sleeve for 1 mm² / awg 18; insulated; electro-tin plated	100
216-204	Ferrule; sleeve for 1.5 mm² / awg 16; insulated; electro-tin plated	1,000
216-205	Ferrule; sleeve for 2.08 mm² / awg 14; insulated; electro-tin plated	1,000
216-206	Ferrule; sleeve for 2.5 mm² / awg 14; insulated; electro-tin plated	100
216-301	Ferrule; sleeve for 0.25 mm² / awg 24; insulated; electro-tin plated	1,000
216-302	Ferrule; sleeve for 0.34 mm² / awg 24; insulated; electro-tin plated	1,000

Downloaded from Arrow.com.

Images & drawings

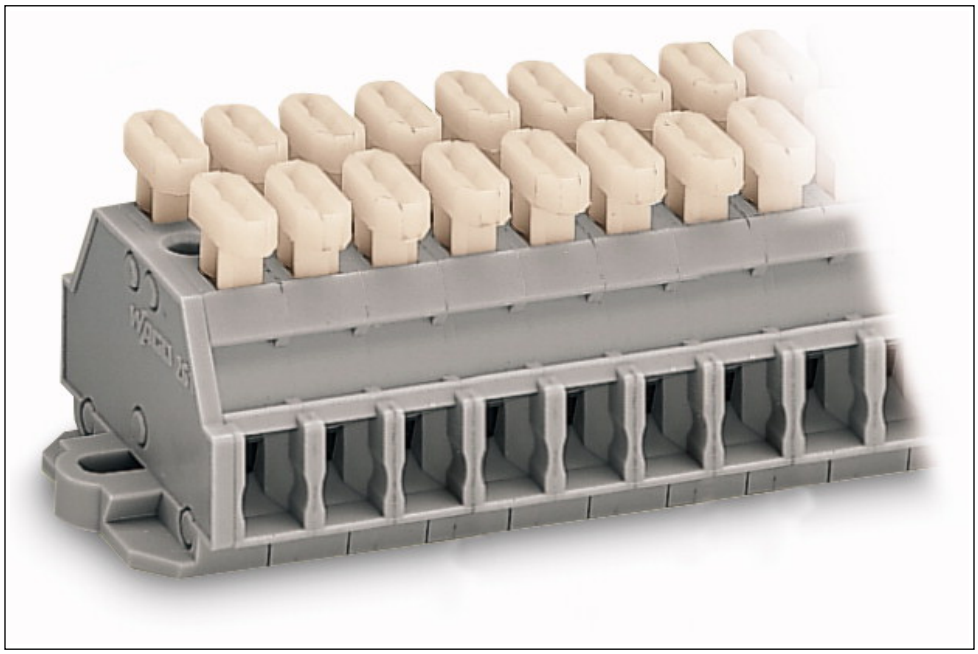

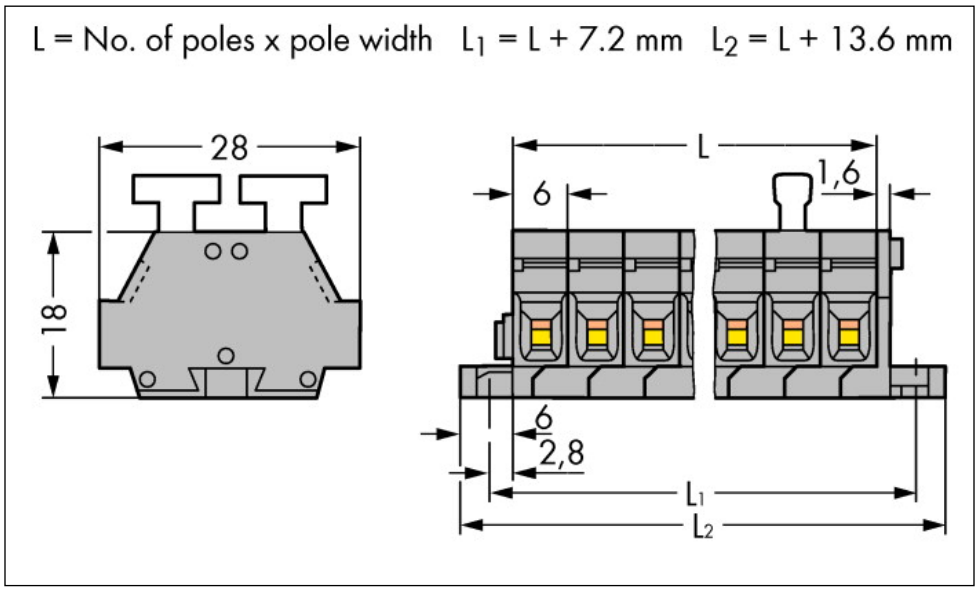

Downloaded from Arrow.com.

Address

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Telefon: 0571/887-0
Fax: 0571/887-169
http://www.wago.com
© WAGO Kontakttechnik GmbH & Co. KG
Technische Änderungen und Irrtümer vorbehalten.

Downloaded from Arrow.com.