

REV.	DATE	DESCRIPTION
A	03/18/05	MODIFY DESCRIPTION – UPDATE DRAWING FORMAT

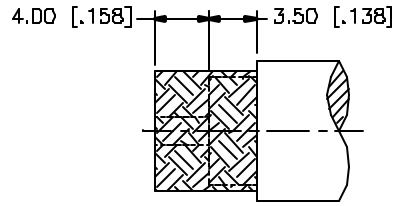

RECOMMENDED
CABLE STRIPPING DIM'S

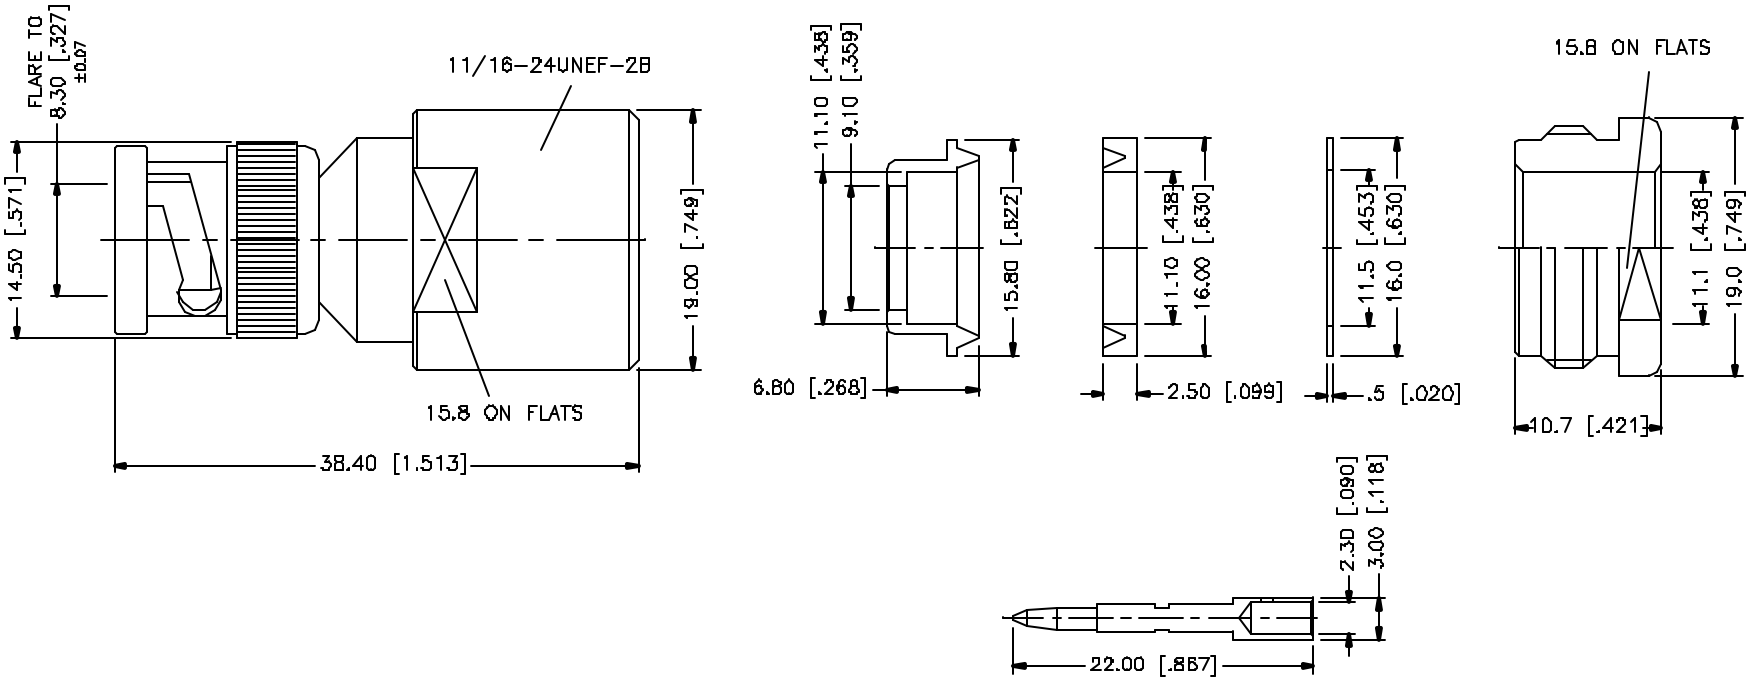

NOTE:

1. CRIMPED CONTACT PIN HEX CRIMP SIZE .100" OR SOLDER.

8				
7	NUT	BRASS	NICKEL	1
6	WASHER	BRASS	NICKEL	1
5	GASKET	SILICONE	RED	1
4	BRAID CLAMP	BRASS	NICKEL	1
3	CONTACT PIN	PHOS. BRONZE	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	SHELL/BODY	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 6mm ± 0.20mm
6 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN C.R.S.	03/18/05
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/112/112531.DWG

Amphenol Connex

PART DESCRIPTION
BNC CLAMP PLUG
(RG–8/U, 213/U, 214/U CABLE)

PART NO. 112531

DWG. NO.	REV.	SIZE	SCALE
112531.DWG	A	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

65781-158 67996-204HLF 86093488314745V1LF 95157-140LF 863013A 54202-S08-07LF 70218-1116LF RJE061661210 DCMF37P 68001-108HLF 68001-200HLF 76384-316LF D15P13A6RV12LF LD15P33E4GV00LF 70234-112LF 86093967896755LF 91614-403ALF 86130202123355E1LF CD15S13E4RV09LF RJSBE5080C2 68002116HLF 86093968813H45V1LF DAPO15S365TLF 68000-236HLF 69192-408HLF 70430-164LF 86093968191755E3LF DEM09P032N LD25S33E4GV00LF 54202-G0805CLF