
16 XNES/J 250

Power supply connectors



Power supply plug, long, straight version, with solder eyes and bend protection

16 XNES/J 250

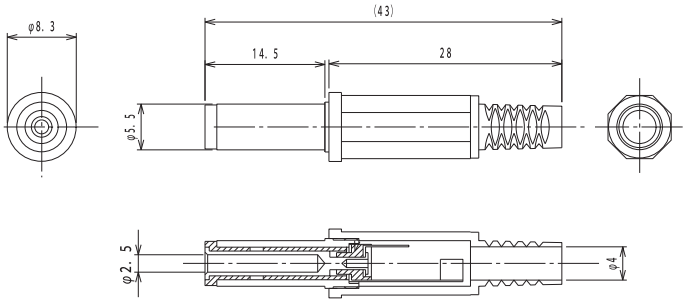

Environmental conditions

Temperature range	-20 °C/+70 °C

Materials

Insulating body	PC
Contact	CuZn, nickel-plated
Insulation	POM/PVC
Housing	PP

Mechanical data

Outer diameter	5.5 mm
Inner diameter	2.5 mm

Connectable conductors for solder area

Cable diameter	4 mm

Electrical data (at T_{amb} 20 °C)

Contact resistance	≤ 30 mΩ
Rated current	1 A
Rated voltage	12 V DC
Rated impulse voltage	500 V/60 s
Insulation resistance	≥ 100 MΩ

Associated products

Counterparts

- 1610 05
- 1610 07
- 1613 21
- 1613 33
- 1614 10
- 1614 15
- 1614 20
- 1614 24
- NEB/J 25
- NEB/J 25 C
- NEK/J 250

16 XNES/J 250

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
XNES/J 250	2	100	500

Packaging:
in bulk, in a cardboard box or a plastic bag

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Lumberg:

KLS 3 KRESS 05 WSV120 WSV50 KGV60 SAP 156884 CZB030369 KLB 3 KRE 03 NES/J 135 0321 06 1614 21 0304 07 1614 05 2,5 MSF 05 KFV 80 SV 120 KGR80 033108-1 1636 06 SAP 156897 SV70C 0262 02 0322 04 KFV 60 KFV 70 KGR50 SGR 30 0331 14 2410 11