
This document was generated on 08/27/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 5023520300
Status: Active
Overview: DuraClik Connector System
Description: DuraClik Wire-to-Board Header, Single Row, Right-Angle, 3 Circuits, Tin (Sn) Plating, Natural

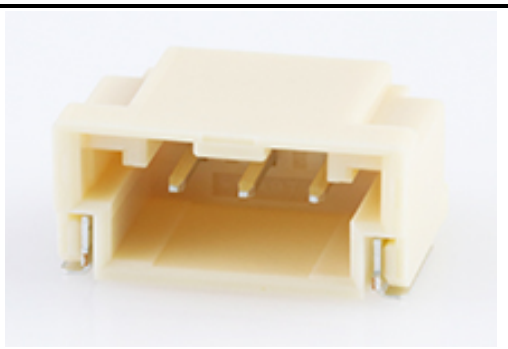

Series image - Reference only

Documents:

3D Model (PDF)
Drawing (PDF)
3D Model
Product Specification PS-502351-001-001 (PDF)
Packaging Specification PK-502352-002-JP-001 (PDF)
Datasheet (PDF)
RoHS Certificate of Compliance (PDF)

Agency Certification

UL	E29179

General

Product Family	PCB Headers
Series	502352
Application	Automotive, Signal, Wire-to-Board
Comments	The Operating Temperature Range when used with DuraClik series 502351 is -40°C to +105°C. It is -40°C to 125°C when used with DuraClik ISL series 560123 or TPA series 505151.
Overview	DuraClik Connector System
Product Name	DuraClik
UPC	884982861848

Physical

Breakaway	No
Circuits (Loaded)	3
Circuits (maximum)	3
Color - Resin	Natural
Durability (mating cycles max)	30
First Mate / Last Break	No
Flammability	SC-0
Glow-Wire Capable	No
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Mated Height	6.40mm
Material - Metal	Copper Alloy
Material - Plating Mating	Tin
Material - Resin	Polyamide
Net Weight	0.495/g
Number of Rows	1
Orientation	Right Angle
PCB Locator	No
PCB Retention	Yes
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	2.00mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Stackable	No
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Surface Mount

Electrical

EU ELV
Compliant

EU RoHS
Compliant

China RoHS

REACH SVHC
Not Contained Per - D(2021)4569-DC (8 July 2021)

Halogen-Free Status
Not Low-Halogen

For more information, please visit Contact US

China ROHS	Green Image
ELV	Compliant
RoHS Phthalates	Not Contained

Search Parts in this Series
502352 Series

Mates With
DuraClik Crimp Housings 502351 , 560123 , 505151

Current - Maximum per Contact	3.0A
Voltage - Maximum	125V

Solder Process Data

Duration at Max. Process Temperature (seconds)	040
Lead-freeProcess Capability	REFLOW
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	255

Material Info

Reference - Drawing Numbers

Packaging Specification	PK-502352-002-JP-001
Product Specification	PS-502351-001-001
Sales Drawing	SD-502352-001-001, SD-502352-002-001

This document was generated on 08/27/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

molex:

0436802002 190990009 397730002 5046940301 0190690033 0436400901 152670357 398800403 417920538 430450225 430451220 436803002 439151216 447642001 759001161 151660057 447691602 0190700155 151670255 190990010 444280402 760475001 152670269 190690096 459705185 190670071 190730231 152660117 152670251 447641402