1-1318853-3 ✔ ACTIVE

AMP | 0.64/025 Connector System


TE Internal #: 1-1318853-3


PCB Mount Header, Horizontal, Wire-to-Board, 24 Position, 2.2 mm [.087 in] Centerline, Fully Shrouded, Tin, 0.64/025 Connector System

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles > Signal Header



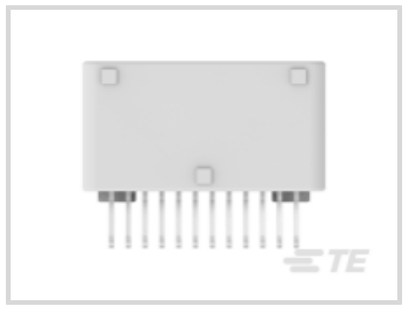

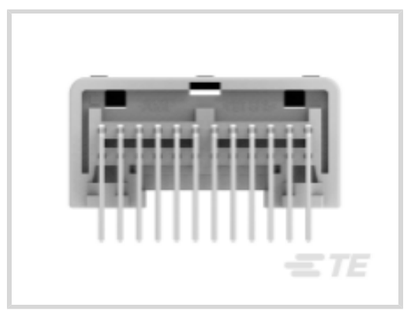

Connector System: **Wire-to-Board**

Number of Positions: **24**

Centerline (Pitch): **2.2 mm [.087 in]**

Sealable: **No**

PCB Mount Orientation: **Horizontal**

All Signal Header (295)

Features

Product Type Features

Mixed & Hybrid Header	No
Connector Shape	Rectangular
PCB Connector Assembly Type	PCB Mount Header
Header Type	Fully Shrouded
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Sections	1
Number of Signal Positions	24
Number of Positions	24
PCB Mount Orientation	Horizontal
Number of Rows	2

Electrical Characteristics

Voltage Rating (Max)	12 VDC
Nominal Voltage Architecture	12 V
Operating Voltage	12 VDC

Body Features

Primary Product Color	Natural
Connector & Keying Code	1

Contact Features

Contact Size	.63mm
Contact Type	Tab
Mating Tab Width	.64 mm[.025 in]
Mating Tab Thickness	.64 mm[.025 in]
Contact Mating Area Plating Material	Tin

Termination Features

Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Mounting Holes	With
Mating Retention	With
Mating Alignment	With
PCB Mount Alignment	Without
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention Type	Locking Interface

Housing Features

Centerline (Pitch)	2.2 mm[.087 in]

Dimensions

Connector Length	24.47 mm[.963 in]
Connector Width	31.8 mm[1.252 in]
PCB Thickness (Recommended)	1.6 mm[.063 in]
Profile Height from PCB	15.5 mm[.61 in]

Usage Conditions

Operating Temperature (Max)	65 °C, 70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100

	°C, 105 °C[149 °F][158 °F][167 °F][176 °F] [185 °F][194 °F][212 °F][221 °F]
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]

Operation/Application

Shielded	No
Circuit Application	Signal

Industry Standards

UL Flammability Rating	None

Packaging Features

Packaging Quantity	14
Packaging Method	Tube

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 240°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # CAT-T319-CH8172
TH/.025 CONNECTOR SYSTEM, HOUSING




TE Part # CAT-T319-T273
TH/.025 CONNECTOR SYSTEM, RECPT AND TAB

Also in the Series | 0.64/025 Connector System



Automotive Connector Caps & Covers (5)

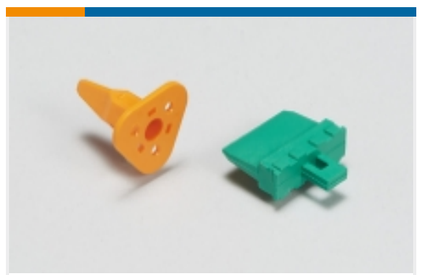

Automotive Connector Locks & Position Assurance(1)



Automotive Housings(127)




Automotive Terminals(16)



Connector Seals & Cavity Plugs(1)



Other Automotive Connector Accessories(4)

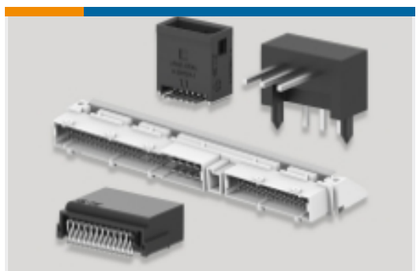

PCB Headers & Receptacles(158)

Customers Also Bought



TE Part #1318382-8
Signal Header




TE Part #1871806-5
0.50 SERIES 40POS CAP ASSEMBLY (SMT TYPE)




TE Part #2229745-1
HVA280 HEADER ASSY, KEY A, ORANGE



TE Part #2311788-1
4POS,TAB2.8X0.8,HDR ASSY,90DEG, SLDR

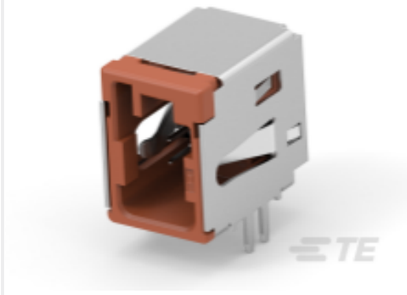

TE Part #2317581-4
4POS,HSL,0.50,HDR ASSY,COD D,WO FLANGE

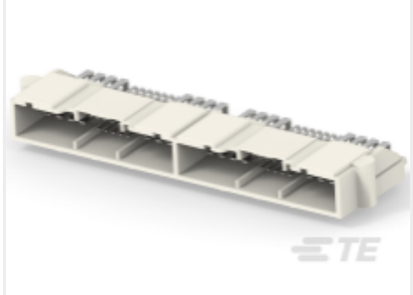

TE Part #3-2188220-1
020/060 56P HDR ASSY(CODE B)



TE Part #4-2188220-2
020/060 56P HDR ASSY(CODE C)

Documents

Product Drawings

025 24POS CAP ASSY H SELECTIVE-TIN

Japanese

025 24POS CAP ASSY H SELECTIVE-TIN

Japanese

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-1318853-3_F.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-1318853-3_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-1318853-3_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications

Crimping of 025 Receptacle Contact

Japanese

Application Specification

Japanese

Instruction Sheets

Instruction Sheet (non U.S.)

English

Instruction Sheet (non U.S.)

Japanese

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

175977-2 ROX05SJ18R SBCHE64R7K 1393431-1 1743455-2 2-292161-3 2377783-2 2380312-2
2005330-1 2834055-1 U5254-000005-030PA 1903112-2 3430B2F51RTDF 917696-1 936348-1 1-794222-0
1-962915-1 1969656-1 CRGCQ2010J3K3 RH73H2A40MKTN SBCHE154R7K SMW73R0JT 2310537-1
3-1393225-0 650075-000 141991-2 CPF0402B37K4E1 MPT100C18RF 3631B101LL TE50BR39J