




MAPX	MODIFICATION	DATE

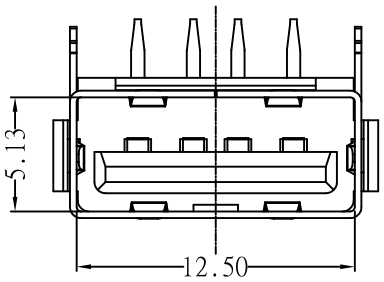





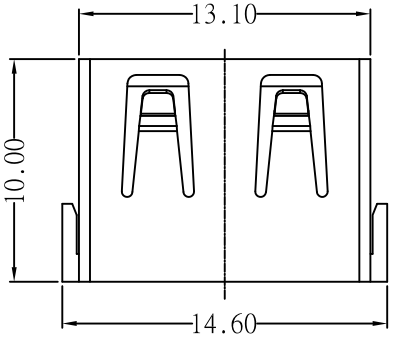

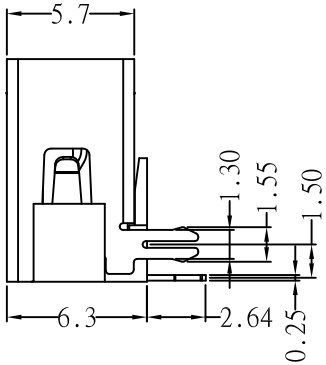

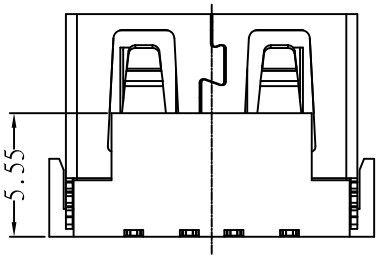

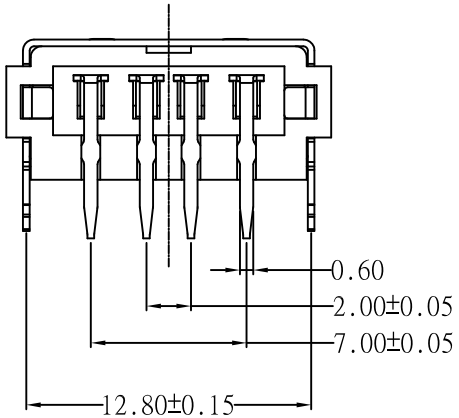

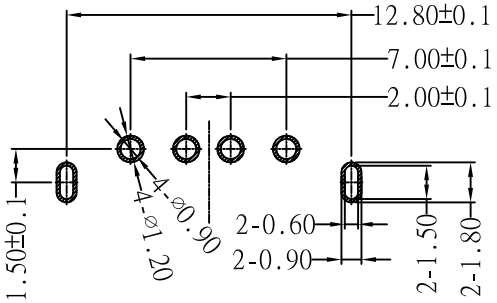

RECOMMENDED P.C.B LAYOUT

Specification:

1.Electrical Characteristics:

Dielectric Withstanding Voltage: AC 500V/1MINUTE.
Insulation Resistance: 1000 MΩ\Min.
Contact Resistance: 30 mΩ\ Max.

2.Mechanical Characteristics:

INSERTION FORCE: 30N(3.06Kgf) MAX
EXTRACTION FORCE: 10~30N(1.02~3.06Kgf)
Durability:1500cycles.EXTRACTION
FORCE:10~30N(1.02~3.06Kgf)

3. Material:

Terminal: C5191/C2680R-EH T=0.25
Plating: Gold 0.76 um Min plating over 1.27 um Min Nickel underplate, 2.54 um Min Sn selective plating on solder tail;
Shell: Bronze, SPCC,H =0.30mm
Plating: Nickel underplate 2.54 um Min;
Housing: PBT PA9T LCP Black White

4.Environmental:

Operating Temperature: 0°C to +85°C.

908-X X X A X XX X X X XX

- 01/02=1U 04=3U 07=15U 08=30U
- 1=氰铜 2=磷铜
- D=90度 Y=180度 S=贴板
- 1=A款6.3 2=A款6.8,
- 01=白色 02=黑色
- 1=PBT 2=LCP 3=PA9T
- A=正向
- 1=铁壳24H 2=铜壳24H
- 5=有边 6=无边 7=有边有缺口
- 1=前两脚 2=后两脚 3=四脚

产品图
PRODUCT CHART DWG

公差一览表
TOLERANCE UNLESS OTHERMSE

X.	±0.30	X.	±5.°
.X	±0.25	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	YANG	制图料号 PRODUCT PART NO.	908-261A1011D10100
比例 SCALE	1:1	审核 CHKD	郭志富	产品名称 PRODUCT NO.	AF10.0A款后两脚无边铁壳PBT白胶6.3DIP
日期 DATE	2019.11.23	核准 APPD	黄国荣	角法 VIEW	版本 VER A0

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

910-151A2021D10100 912-112A2021S10100 917-B88C201AH70201 917-P81A202ES60201
918-418K2022Y40011 904-232A2031S10100 907-312A1101Y10210 916-151A1022Y10200
919-162A1012D10400 920-A62A2021S10108 904-232B2032S10100 912-112A1011D10100
920-F52A2021S10105 906-262A1021D10200 906-552A1012D10200 912-312A1012D10100
920-A64A2091S101A3 918-318K2023C40005 920-154A2021Y10110 920-C62A2021S10103
906-752B1114D10200 920-C52A2021S10105 911-221A2021S10100 918-468K2029Y50000
907-111A1022D10200 918-415K3028S40000 920-A62A2021S10104 904-331B2032S10200
905-761A2032S10200 908-351A1011D10100