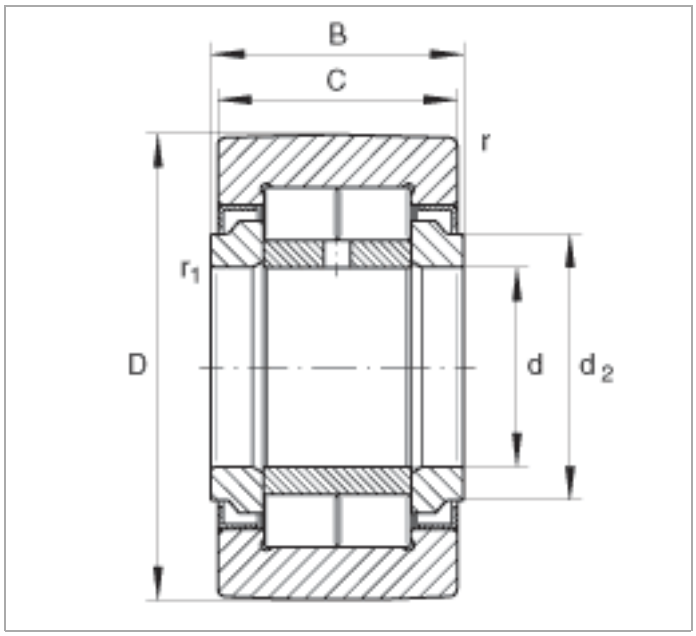
Yoke type track rollers NUTR20 (Series NUTR)

full complement cylindrical roller set, with axial guidance, labyrinth seals on both sides

The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all the guidelines in these overview pages. Further information is given on many products under the menu item "Description". You can also order comprehensive information via the Catalogue ordering system (http://www.ina.de/content.ina.de/en/mediathek/library/library.jsp) or by telephone on +49 (91 32) 82 - 28 97.

d	20	mm	
D	47	mm	
B	25	mm	
C	24	mm	
d_2	27	mm	
$r_{1\,min}$	0,5	mm	
r_{min}	1	mm	
m	245	g	Mass
$C_{r\,w}$	28500	N	Effective dynamic load rating as track roller (radial)
$C_{0r\,w}$	37500	N	Effective static load rating as track roller (radial)
$F_{r\,per}$	16200	N	Permissible dynamic radial load
$F_{0r\,per}$	32500	N	Permissible static radial load
$C_{ur\,w}$	4850	N	Fatigue limit load
$n_{D\,G}$	4200	1/min	Speed (with continuous operation and grease lubrication)


B
C
r
r1
D
d
d2

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

INA:

GE40-FO-2RS LR203-X-2RSR NA4907-2RSR-XL PCJT40-XL-N PNA20/42-XL GE6-UK IR7X10X12-XL KB16-PP-AS KH10PP NKXR30-XL NUKR35-X-A GE50-DO-2RS NATV15-PP-A NKIA59/22-XL RCJY40-XL-N KH06-PP NA2200-2RSR RME60-XL-N#N1>1 TME50-XL-N GE50-UK-2RS-A KR5207-2RS GE40-UK-2RS-A KB40-PP-AS NKIB5902-XL GE35-DO-2RS HK20202RSL271 IR17X22X14-IS1-OF-XL KRE52-PP-A RAE30-XL-NPP-FA106 KWVE25-B-V2-G3