
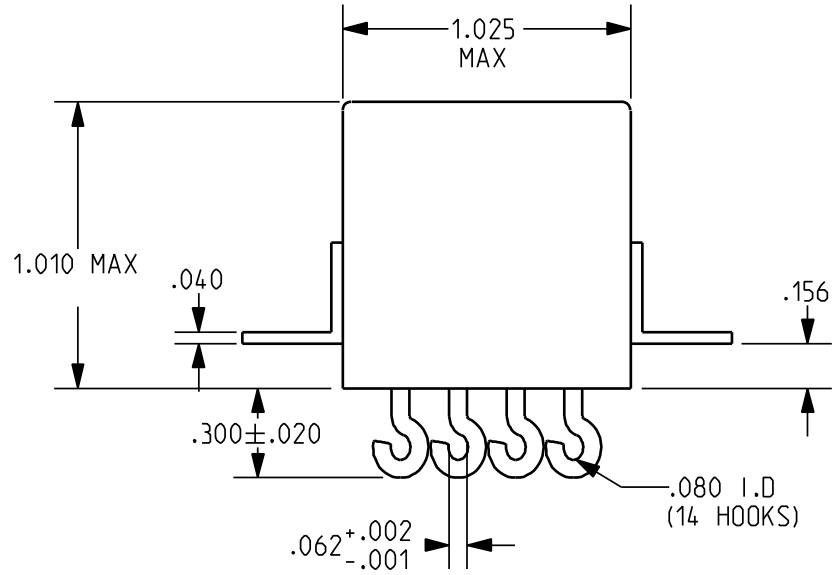


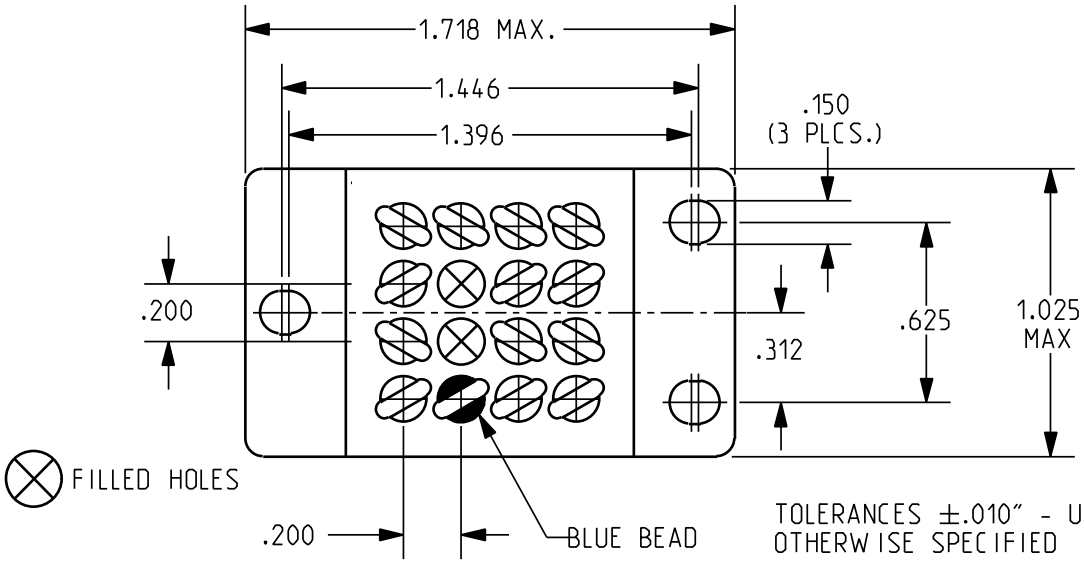

TOLERANCES ±.010" - UNLESS OTHERWISE SPECIFIED

REV. B
DCO 300859

COIL: @ 25°C

RESISTANCE	290 OHMS ±10%
NOMINAL VOLTAGE	28 VDC
MUST OPERATE	13.5 VDC MAX.
MUST RELEASE	5.5 VDC MAX., 2.3 VDC MIN.

ENVIRONMENT:


VIBRATION 10 Hz TO 3000 Hz @ 30 g's

SHOCK 200 g's 6 MS. DURATION

TEMPERATURE -70 °C TO +125 °C

NOTES: OPERATE, RELEASE 15 MS MAX.
CONTACT BOUNCE 1 MS MAX.

CUSTOMER DATA SHEET

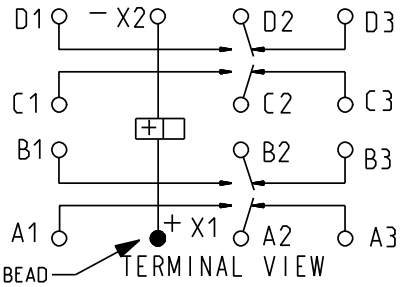

CONTACT RATING:
10 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE
100,000 OPERATIONS

DR. B.D. 16MAY2008 | CK. J.M.B. 5/19/08

©COPYRIGHT 2005
TYCO ELECTRONICS CORPORATION
ALL INTERNATIONAL RIGHTS RESERVED

Tyco Electronics

CUST. CATALOG ITEM
CUST. NO. ---- REV. ----

TE NUMBER
1617756-4

CII PART NUMBER
FCA-410-CY3

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

SBCHE64R7K 1-794222-0 1393431-1 175977-2 1903112-2 2380312-2 3-1393225-0 SBCHE154R7K SMW73R0JT 141991-2 3631B101LL 936348-1 1743455-2 ROX05SJ18R U5254-000005-030PA 650075-000 CPF0402B37K4E1 CRGCQ2010J3K3 MPT100C18RF 2834055-1 1-962915-1 2310537-1 2377783-2 917696-1 RH73H2A40MKTN TE50BR39J 2-292161-3 3430B2F51RTDF 1969656-1 2005330-1