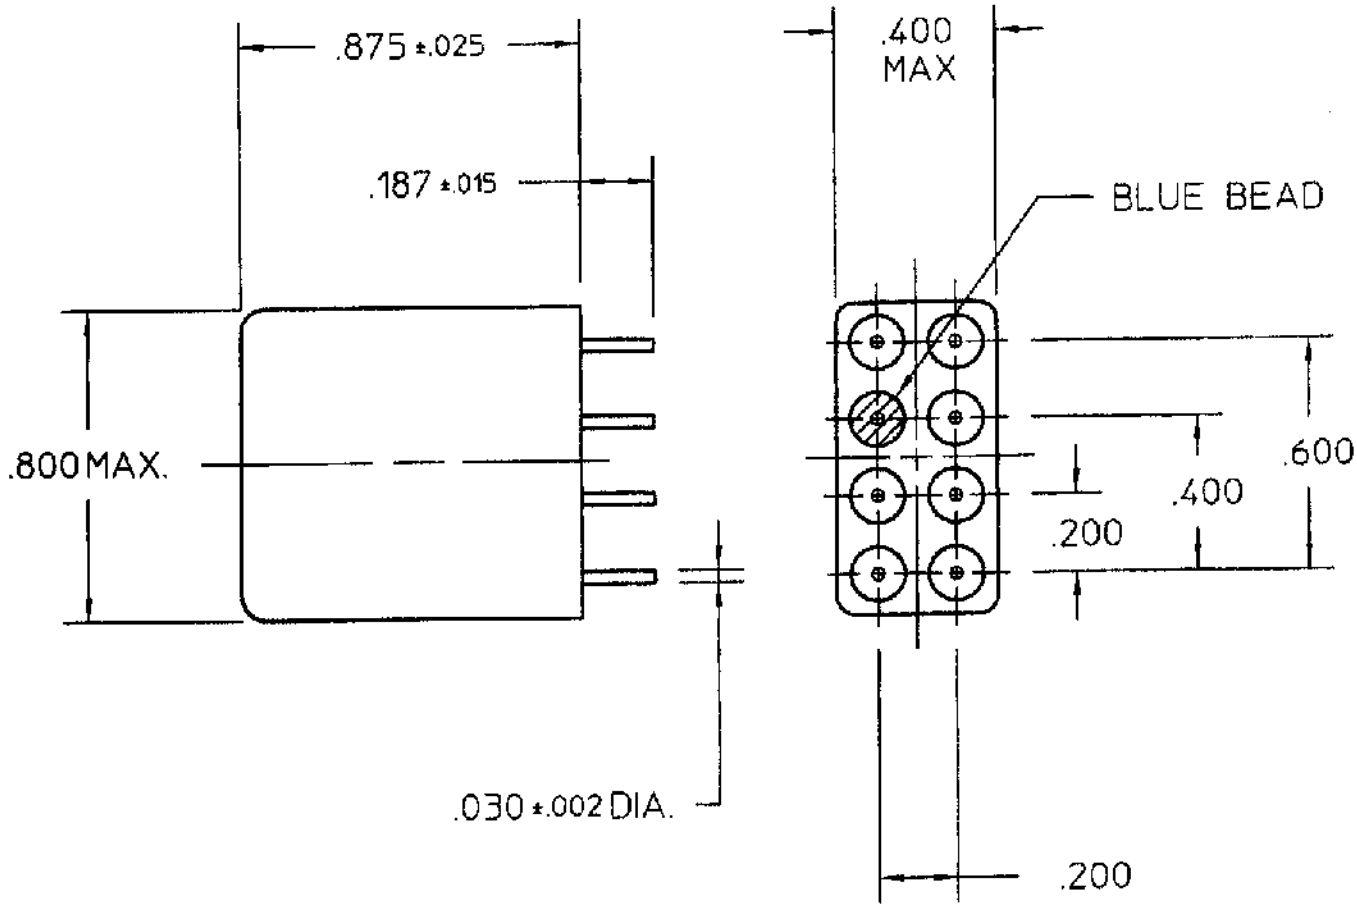


REV. 0
DCO 16554

COIL: @ 25°C

RESISTANCE 44 OHMS ±10%

NOMINAL VOLTAGE 6.0 VDC

MUST OPERATE 3.0 VDC

MUST RELEASE 2.1 VDC MAX., .21 MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 ± 1 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 6 MS MAX.
CONTACT BOUNCE 1 MS MAX.

CUSTOMER DATA SHEET

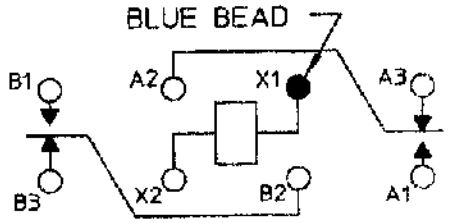

TERMINAL VIEW

CONTACT RATING:
2 AMPS 28 VDC RESISTIVE
100,000 OPERATIONS MINIMUM

DR. PBB 10/13/00 | CK. TLG 10-16-00

CII Technologies
advanced control electronic solutions

CUST. OPL
CUST. NO. M5757/10-059 REV.

"FW" RELAY

FW1201S07

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

2-292161-3 2005330-1 3430B2F51RTDF CRGCQ2010J3K3 U5254-000005-030PA 141991-2 1903112-2 2377783-2 ROX05SJ18R 1-962915-1 175977-2 1969656-1 936348-1 CPF0402B37K4E1 1393431-1 2380312-2 RH73H2A40MKTN 3-1393225-0 917696-1 SMW73R0JT 1-794222-0 2310537-1 3631B101LL 650075-000 1743455-2 SBCHE64R7K TE50BR39J 2834055-1 MPT100C18RF SBCHE154R7K