

Mechanical Dimensions (mm)

Tolerances ±0.3 Unless Otherwise Specified

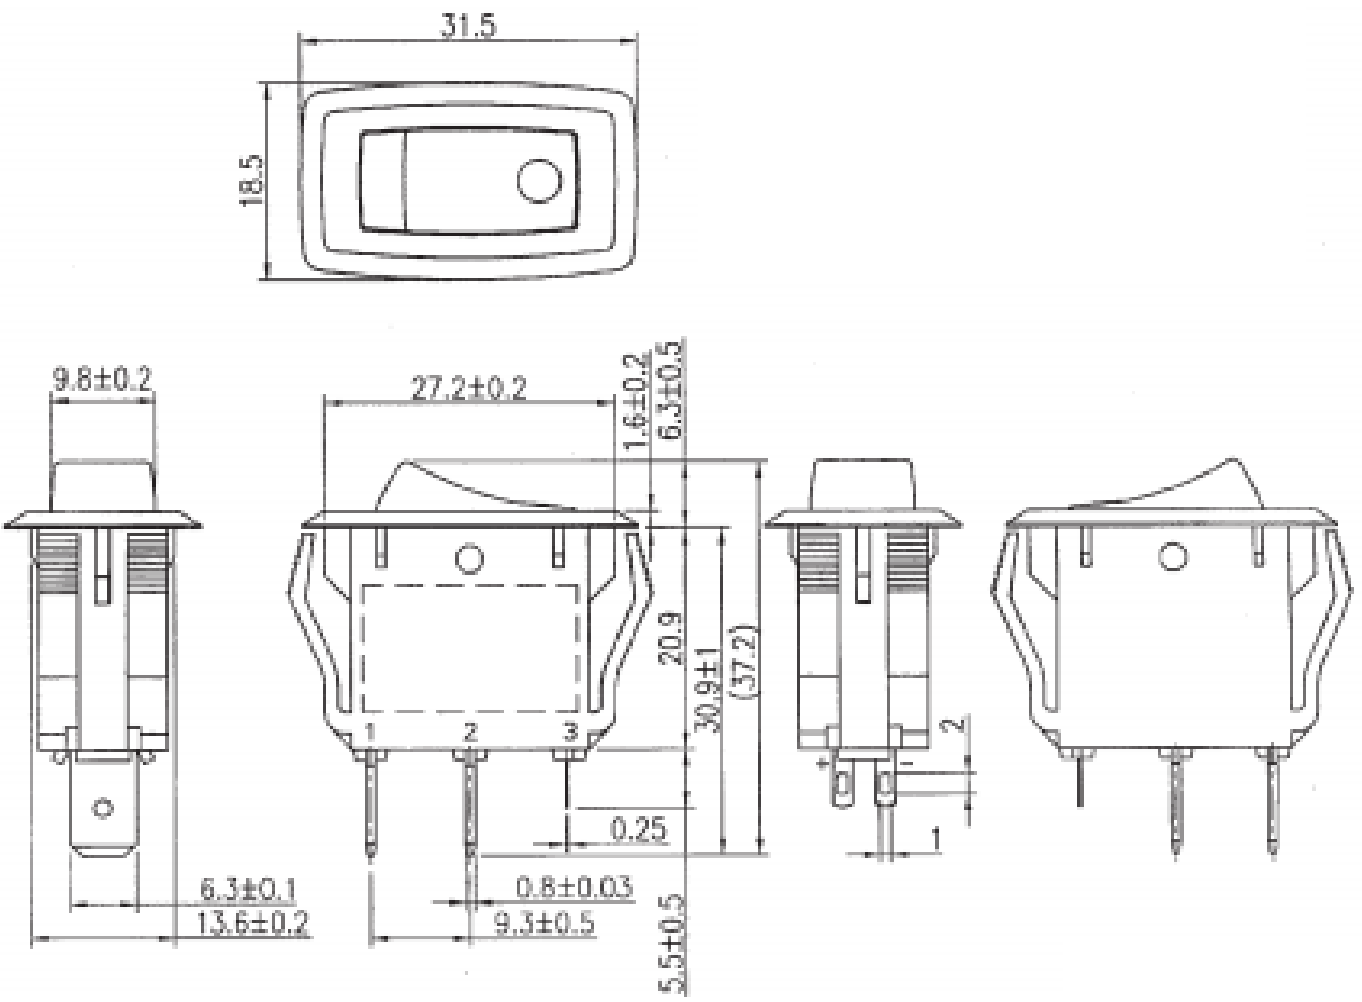


Mounting Hole



Thickness	X	Y
0.75~1.25	27.6-0.1	13.8+0.1
1.25~2	27.8-0.1	13.8+0.1
2~3	28.0-0.1	13.8+0.1

Circuit Diagram

4P SPST OFF-ON (LED-I)

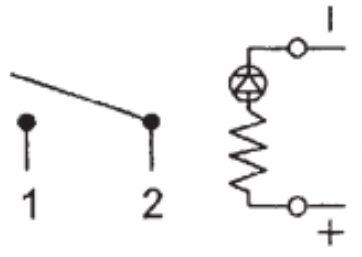

Electrical Specifications

Rating	16A 12V DC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-25°C~85°C

Material Specifications

Frame	Black, Nylon #66
Actuator	Black, Nylon #66
Lens	Blue, PC
LED	Blue (Independent)

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

RF3-1A-DC-2-GL SRA1-1A-DC-1-NN-2 SRA1-2F-DC-1-NN WR1 RC-1A-DC-1-AL RF1-1A-DC-2-B-3 SRB1-1G-DC-1-NN TA2-1G-DC-6-O SRD1-2A-DC-1-BGN SRD2-2F-DC-1-BNN TA2-1A-DC-5 TE1-1F-DC-1-PB PB-1A-DC-2-B RG3-1A-DC-1-B TA1-1A-DC-4 TC6-P1-Z SB-1B-DC-3-B RA4-2A-DC-2-AL RD2-1A-DC-1-AL TE3-1A-DC-1-AL PB-1A-DC-2-RDL PB-1B-DC-2-RIL PD-1E-DC-9-UL SB-1B-DC-3-R SRC1-1B-DC-1-B TB1-2H-DC-6 TE6-1A-DC-1-UL SC-B SRD2-1G-DC-1-BNN SRD2-2F-DC-1-RNN