KXG Series

- For electronic ballast circuits and other long life applications
- Endurance with ripple current : 8,000 to 10,000 hours at 105℃
- Non solvent resistant type
- RoHS2 Compliant

KXJ ↑ Downsized → KXG





◆SPECIFICATIONS

Items	Characteristics				
Category Temperature Range	-40 to +105℃ (160 to 400Vdc) -25 to+105℃ (450Vdc)				
Rated Voltage Range	160 to 450Vdc				
Capacitance Tolerance	±20% (M)				(at 20℃, 120Hz)
Leakage Current		After 1 minute	After 5 minutes		
	CV≦1,000	I=0.1CV+40	I=0.03CV+15		
	CV>1,000	I=0.04CV+100	I=0.02CV+25		
	Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)				(at 20℃)
Dissipation Factor (tan δ)	Rated voltage (Vdc)	160 to 250V	350 to 450V		
	tan δ (Max.)	0.20	0.24		(at 20℃, 120Hz)
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (Vdc)	160 to 250V	350 & 400V	450V	
	Z(-25℃)/Z(+20℃)	3	5	6	
	Z(-40℃)/Z(+20℃)	6	6	—	(at 120Hz)
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20℃ after subjected to DC voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for 10,000 hours (8,000 hours for φ10) at 105℃.				
	Capacitance change	≦±20% of the initial value			
	D.F. (tan δ)	≦200% of the initial specified value			
	Leakage current	≦The initial specified value			
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for 1,000 hours at 105℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.				
	Capacitance change	≦±20% of the initial value			
	D.F. (tan δ)	≦200% of the initial specified value			
	Leakage current	≦500% of the initial specified value			

◆DIMENSIONS [mm]

●Terminal Code : E

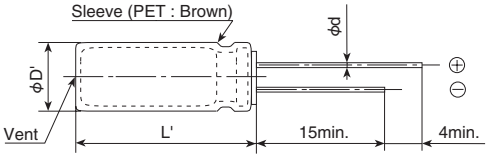



Gas escape end seal

φD	10	12.5	16	18
φd	0.6	0.6	0.8	0.8
F	5.0	5.0	7.5	7.5
φD'	φD+0.5max.			
L'	L+1.5max.			

◆PART NUMBERING SYSTEM

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
E	K	X	G	□	□	□	E	□	□	□	□	□	M	□	□	□	S

- Supplement code
- Size code
- Capacitance tolerance code
- Capacitance code (ex. 6.8μF:6R8,10μF:100,100μF:101)
- Lead forming·taping code
- Terminal code
- Voltage code (ex. 160V:161,450V:451)
- Series code
- Category

Please refer to "Product code guide (radial lead type)"

◆RATED RIPPLE CURRENT MULTIPLIERS

●Frequency Multipliers

Capacitance(μF) \ Frequency(Hz)	120	1k	10k	100k
6.8 to 82	1.00	1.75	2.25	2.50
100 to 330	1.00	1.67	2.05	2.25

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5℃ rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

Product specifications in this catalog are subject to change without notice.Request our product specifications before purchase and/or use. Please use our products based on the information contained in this catalog and product specifications.

KXG Series

◆STANDARD RATINGS

WV (V_{dc})	Cap (μF)	Case size φD×L(mm)	tan δ	Rated ripple current(mArms/105℃)		Part No.
				120Hz	100kHz	
160	10	10 × 16	0.20	125	315	EKXG161E□□100MJ16S
	22	10 × 20	0.20	200	500	EKXG161E□□220MJ20S
	33	10 × 20	0.20	250	625	EKXG161E□□330MJ20S
	47	10 × 20	0.20	300	750	EKXG161E□□470MJ20S
	68	12.5 × 20	0.20	470	1,175	EKXG161E□□680MK20S
	82	12.5 × 20	0.20	510	1,275	EKXG161E□□820MK20S
	100	12.5 × 25	0.20	620	1,395	EKXG161E□□101MK25S
	100	16 × 20	0.20	630	1,420	EKXG161E□□101ML20S
	150	16 × 20	0.20	770	1,735	EKXG161E□□151ML20S
	220	16 × 25	0.20	1,020	2,295	EKXG161E□□221ML25S
	330	18 × 31.5	0.20	1,390	3,130	EKXG161E□□331MMN3S
200	10	10 × 16	0.20	125	315	EKXG201E□□100MJ16S
	22	10 × 20	0.20	200	500	EKXG201E□□220MJ20S
	33	10 × 20	0.20	260	650	EKXG201E□□330MJ20S
	47	12.5 × 20	0.20	390	975	EKXG201E□□470MK20S
	68	12.5 × 20	0.20	470	1,175	EKXG201E□□680MK20S
	82	16 × 20	0.20	550	1,375	EKXG201E□□820ML20S
	100	16 × 20	0.20	630	1,420	EKXG201E□□101ML20S
	150	16 × 25	0.20	840	1,890	EKXG201E□□151ML25S
	220	18 × 25	0.20	1,050	2,365	EKXG201E□□221MM25S
	330	18 × 35.5	0.20	1,430	3,220	EKXG201E□□331MMP1S
250	10	10 × 20	0.20	140	350	EKXG251E□□100MJ20S
	22	10 × 20	0.20	200	500	EKXG251E□□220MJ20S
	33	12.5 × 20	0.20	320	800	EKXG251E□□330MK20S
	47	12.5 × 20	0.20	390	975	EKXG251E□□470MK20S
	68	16 × 20	0.20	520	1,300	EKXG251E□□680ML20S
	82	16 × 20	0.20	550	1,375	EKXG251E□□820ML20S
	100	16 × 25	0.20	680	1,530	EKXG251E□□101ML25S
	150	18 × 25	0.20	860	1,935	EKXG251E□□151MM25S
	220	18 × 31.5	0.20	1,130	2,545	EKXG251E□□221MMN3S
350	6.8	10 × 16	0.24	110	275	EKXG351E□□6R8MJ16S
	10	10 × 20	0.24	140	350	EKXG351E□□100MJ20S
	22	12.5 × 20	0.24	260	650	EKXG351E□□220MK20S
	33	16 × 20	0.24	360	900	EKXG351E□□330ML20S
	47	16 × 20	0.24	430	1,075	EKXG351E□□470ML20S
	68	16 × 25	0.24	560	1,400	EKXG351E□□680ML25S
	68	18 × 20	0.24	550	1,375	EKXG351E□□680MM20S
	82	18 × 25	0.24	610	1,525	EKXG351E□□820MM25S
	100	18 × 25	0.24	700	1,575	EKXG351E□□101MM25S
	120	18 × 31.5	0.24	830	1,865	EKXG351E□□121MMN3S
	150	18 × 35.5	0.24	960	2,160	EKXG351E□□151MMP1S
400	6.8	10 × 16	0.24	110	275	EKXG401E□□6R8MJ16S
	10	10 × 20	0.24	140	350	EKXG401E□□100MJ20S
	15	12.5 × 20	0.24	220	550	EKXG401E□□150MK20S
	22	12.5 × 20	0.24	260	650	EKXG401E□□220MK20S
	33	16 × 20	0.24	360	900	EKXG401E□□330ML20S
	47	16 × 25	0.24	470	1,175	EKXG401E□□470ML25S
	47	18 × 20	0.24	450	1,125	EKXG401E□□470MM20S
	68	18 × 25	0.24	585	1,465	EKXG401E□□680MM25S
	82	18 × 25	0.24	610	1,525	EKXG401E□□820MM25S
	100	18 × 31.5	0.24	765	1,720	EKXG401E□□101MMN3S
	120	18 × 35.5	0.24	865	1,945	EKXG401E□□121MMP1S
	150	18 × 40	0.24	985	2,215	EKXG401E□□151MM40S
450	6.8	10 × 20	0.24	110	275	EKXG451E□□6R8MJ20S
	10	12.5 × 20	0.24	180	450	EKXG451E□□100MK20S
	15	12.5 × 25	0.24	240	600	EKXG451E□□150MK25S
	22	16 × 20	0.24	290	725	EKXG451E□□220ML20S
	33	16 × 25	0.24	390	975	EKXG451E□□330ML25S
	33	18 × 20	0.24	380	950	EKXG451E□□330MM20S
	47	18 × 25	0.24	480	1,200	EKXG451E□□470MM25S
	68	18 × 31.5	0.24	630	1,575	EKXG451E□□680MMN3S
	82	18 × 35.5	0.24	715	1,785	EKXG451E□□820MMP1S
	100	18 × 40	0.24	800	1,800	EKXG451E□□101MM40S

□□ : Enter the appropriate lead forming or taping code.

Product specifications in this catalog are subject to change without notice.Request our product specifications before purchase and/or use. Please use our products based on the information contained in this catalog and product specifications.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Nippon Chemi-Con:

EKMG101ELL470MJC5S EKMR401VSN681MR50S EKY-101ELL101MK16S EKY-500ELL471MJ30S EGXF500ELL751MK25S EKMQ201VSN152MR40S EKY-101ETD221MK25S EMVE101ARA470MKE0S APXA6R3ARA471MJ80G EKMG160ELL682MLN3S EMVY160ARA100MD55G EGPA350ELL122ML20S EGXF630ELL391MK20S EKZE101ELL101MK16S ELXZ630ELL152MM35S HHXC500ARA470MHA0G EGPD250ELL302MK25H EKMQ401VSN151MQ25S EKY-250ELL331MJC5S EKYA500ELL222MLP1S EKXJ401ELL121MMN3S EKYA100ELL331MF11D EKMG251ELL101MLN3S EKMS161VSN332MA50S EKXJ401ELL680ML25S EMZA630ARA301MKG5S EKXG351ELL151MMP1S EKYB250ELL102MJ20S EKZN350ELL471MJ20S ESMQ401VSN181MP35S